UNITED NATIONS



Economic and Social Council

Distr. GENERAL

ECE/TRANS/WP.29/2009/18 17 December 2008

ENGLISH

Original: ENGLISH AND FRENCH

ECONOMIC COMMISSION FOR EUROPE

INLAND TRANSPORT COMMITTEE

World Forum for Harmonization of Vehicle Regulations

One-hundred-and-forty-seventh session Geneva, 10 - 13 March 2009 Item 4.2.13 of the provisional agenda

1958 AGREEMENT

Consideration of draft amendments to existing Regulations

Proposal for Supplement 33 to the 03 series of amendments to Regulation No. 37 (Filament lamps of power driven vehicles and their trailers)

Submitted by the Working Party on Lighting and Light-Signalling (GRE) */

The text reproduced below was adopted by GRE at its sixtieth session. It is based on ECE/TRANS/WP.29/GRE/2008/39, not amended and ECE/TRANS/WP.29/GRE/2008/49, not amended. It is submitted to WP.29 and AC.1 for consideration (ECE/TRANS/WP.29/GRE/60, para. 6).

GE.08-

^{*/} In accordance with the programme of work of the Inland Transport Committee for 2006-2010 (ECE/TRANS/166/Add.1, programme activity 02.4), the World Forum will develop, harmonize and update Regulations in order to enhance performance of vehicles. The present document is submitted in conformity with that mandate.

ECE/TRANS/WP.29/2009/18 page 2

Annex 1,

The list of categories of filament lamps and their sheets, amend to read:

"

Group 2

Only for use in signalling lamps, cornering lamps, reversing lamps and rear registration plate lamps:

Category	Sheet number(s)				
C5W	C5W/1				
H6W	H6W/1				
H10W	H10W/1 to 2				
HY6W	H6W/1				
HY10W	H10W/1 to 2				
HY21W	H21W/1 to 2				

The list of sheets for filament lamps and their sequence, amend to read:

"

```
Sheet number(s)
```

...


H6W/1 H10W/1 to 2

H21W/1 to 2

• • • •

<u>Insert new sheets H10W/1 to 2, between sheet H6W/1 and sheet H21W/1, to read (see next pages):</u>

The drawings are intended only to illustrate the essential dimensions (in mm) of the filament lamp

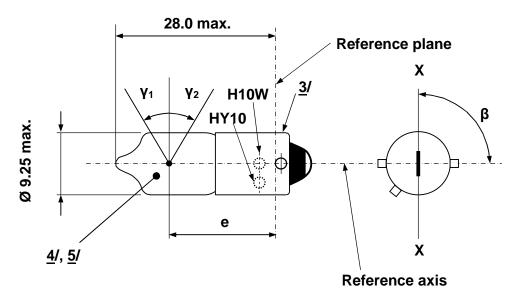

Dimensions in mm		Filament lamps of normal production			Standard filament lamp		
		min.	nom.	max.			
е			14.25	15.0	15.75	15.0 ± 0.25	
Lateral deviation <u>1</u> /				0.75	0.4 max		
			82.5°	90°	97.5°	90° ± 5°	
γ1, γ2 <u>2</u> /		30 °			30° min.		
Can	Cap: H10W: BAU9s in accordance with IEC Publication 60061 (sheet 7004-[]) HY10W BAU29s in accordance with IEC Publication 60061 (sheet 7004-[])						
ELECTRICAL AND PHOTOMETRIC CHARACTERISTICS							
Datad valuas	Volts		12		12		
Rated values	Watts		10		10		
Test voltage	Volts		13.5		13.5		
Watts		12 max.		12 max.			
Objective values	Luminous	H10W		200 ± 12 %			
		HY10W	120 ± 17 %				
Reference luminous flux at approximately 13.5 V						White: 200 lm	
						Amber: 120 lm	

CATEGORIES H10W AND HY10W

Sheet H10W/2

- 1/ Maximum lateral deviation of filament centre from two mutually perpendicular planes both containing the reference axis and one containing axis X-X.
- In the area between the outer legs of the angles $\gamma 1$ and $\gamma 2$, the bulb shall have no optically distorting areas and the curvature of the bulb shall have a radius not less than 50 % of the actual bulb diameter.
- 3/ Over the entire length of the cap there shall be no projections or soldering exceeding the permissible maximum diameter of the cap.
- 4/ The light emitted from filament lamps of normal production shall be white for category H10W and amber for category HY10W.
- 5/ The light emitted from standard filament lamps shall be white for category H10W and amber or white for category HY10W.

Sheet H13/4, the table, amend to read:

- - - - -