

## **Proposal for Amendment 1 to global technical regulation (UN GTR) No.16 (Tyres)**

The text reproduced below is based on ECE/TRANS/WP.29/2016/70 adopted by the Working Party on Brakes and Running Gear (GRRF) at its eighty-first session (ECE/TRANS/WP.29/GRRF/81, para. 30). It is also based on ECE/TRANS/WP.29/GRRF/2016/2.

**Note:**

In the corresponding provisions of the text below, the comparison contents of the applicable China tyre regulations are given by the following example color labelling:

**"example". "example" "example"**

## Global technical regulation on tyres\*

### Contents

	<i>Page</i>
I. Statement of technical rationale and justification.....	4
A. Introduction .....	4
B. Background of tyre regulations.....	4
C. Procedural background and development of the global technical regulation.....	5
D. Technical and economic feasibility .....	10
E. Anticipated benefits .....	10
F. Potential cost effectiveness.....	10
G. Specific statement of technical rationale and Justification for Amendment 1 to UN GTR No. 16.....	11
A. Objective .....	11
B. Introduction and procedural background.....	11
C. Justification of changes .....	11
II. Text of the global technical regulation.....	13
1. Scope .....	13
2. Definitions .....	13
3. Requirements.....	20
3.1. Plant codes.....	20
3.2. Marking .....	21
3.3. Other sidewall markings.....	21
3.4. Tread wear indicators .....	24
3.5. Physical dimensions of passenger car tyres.....	24
3.6. Strength test for passenger car tyres .....	26
3.7. Tubeless tyre bead unseating resistance test for passenger car tyres.....	28
3.8. Tyre rolling sound emission test.....	31
3.9. Endurance test for passenger car tyres.....	38
3.10. Low inflation pressure performance test for passenger car tyres.....	39
3.11. High speed performance test for passenger car tyres.....	40
3.12. Test for adhesion performance on wet surfaces.....	43

\* Including its Amendment 1.

3.13. Procedure to assess the flat tyre running mode of passenger car run flat [AR1] tyres....	68
3.14. Strength test for LT/C tyres .....	68
3.15. Tubeless tyre bead unseating resistance test for LT/C tyres with rim codes of 10 or greater .....	69
3.16. Load/speed endurance test for LT/C tyres .....	72
3.17. Endurance test for LT/C tyres .....	74
3.18. Low inflation pressure performance test for LT/C tyres .....	76
3.19. High speed performance test for LT/C tyres .....	77
3.20. Physical dimensions of LT/C tyres (From FMVSS 139).....	78
3.21. Physical dimensions of LT/C tyres (From Regulation No. 54) .....	79
<b>3.20 Physical dimensions of LT/C tyres [AR2]</b>	
3.221. .... Tyre rolling resistance test.....	80
3.222. .... Snow performance test relative to snow tyre for use in severe snow conditions.....	91

## Annexes

1	Speed symbol table .....	103
2	Load index (LI) and equivalent load capacity table .....	104
3	Nominal rim diameter code table .....	105
4	<b>Relation between the pressure index (“PSI”) and the units of pressure between the pressure index (‘psi’) and the units of pressure (kPa)</b>	106
5	Variation of load capacity with speed commercial vehicles tyres.....	108
6	Tyre-size designations and dimensions .....	110
7	Tyre standards organizations.....	117
8	Rolling resistance test equipment tolerances.....	118
9	Measuring rim width.....	121
10	Deceleration method - Measurements and data processing for deceleration value obtaining in differential form $d\omega/dt$ .....	123

## **I. Statement of technical rationale and justification** [TN3]

### **A. Introduction and procedural background**

1. — The objective of this Global Technical Regulation (GTR) is to establish provisions for new radial pneumatic tyres equipping passenger cars and light truck (commercial) vehicles up to and including 4,536 kg (10,000 pounds) under the 1998 Agreement. The official bases of this harmonized set of requirements are Regulations Nos. 30, and 54 and 117 annexed to the 1958 Agreement, as well as the Federal Motor Vehicle Safety Standard (FMVSS) 139 requirements established in the United States of America under the direction of the National Highway Traffic Safety Administration (NHTSA). Regulations from Gulf States Organization (GSO), India and China, although not officially registered in the compendium of regulations for the tyre GTR, were also analysed and requirements from them were considered in this GTR insofar as they were not already covered by one of the regulations from UNECE and United States of America. In addition, parts of FMVSS 109 and 119 were copied directly into this GTR, since they are applicable to certain tyres for light commercial vehicles (LT or C tyres).

2. — Many countries throughout the world have already introduced regulations concerning pneumatic tyres. Many of the existing regulations are based on the four primary ones mentioned above. However, many differences in test conditions and regulatory marking requirements require tyre manufacturers to produce almost identical products but with market specific variations to meet local market requirements — including slight variations on sidewall marking provisions.

3. — This first phase of the GTR for tyres harmonizes the requirements for passenger car tyres. Work is on going to define the technical specification for the harmonization of tyres with the designations LT or C which are primarily fitted on light commercial vehicles.

4. — Additional technical evaluation is necessary to assess whether consideration should be given for certain tyre types typical in the North American market in relation to the specifications in paragraph 3.12. (referring to the test for adhesion performance on wet surfaces). Government and industry in the United States of America are coordinating to conduct this evaluation.

4bis. For the purposes of future harmonization, it is noted that amendments are anticipated in the areas of the Strength test for passenger car tyres (section 3.6) and the Tubeless tyre bead unseating resistance test for passenger car tyres (section 3.7). For both tests, work is underway in the United States to modify the test conditions or performance requirements to accommodate certain tyre sizes.

4ter. Following additional technical evaluation of the adhesion performance on wet surfaces (section 3.12), a future additional category of use might be necessary for certain tyre types typical in the North American market.

### **B. Background of tyre regulations**

5. — Radial pneumatic tyres for passenger cars and light vehicles are increasingly becoming worldwide products, expected to be used anywhere in the world when mounted as original equipment on new vehicles which are themselves marketed on a global basis. This globalization creates significant opportunities for manufacturers to deliver better and more cost efficient products but also requires harmonization of the technical provisions at a global level to avoid increasing manufacturing costs.

6. — Although testing requirements for different regulations used around the world are often substantially similar, slight variations in test procedures oblige tyre manufacturers to test the same object for the same performance characteristic under slightly different conditions, without any significant improvement in the final product.

7. — Marking requirements are also variable around the world, and the same tyre may need several different approval marks to be marketed in a truly worldwide fashion. Any harmonization of such markings should continue to be a priority, as it would clarify the administrative identity of the tyre and facilitate the management of production moulds.

### **C. Procedural background and development of the global technical regulation**

8. — This UN GTR was developed by the GRRF informal working group on the Tyre GTR.

9. — The work on this GTR began informally in December of 2004 with a meeting in Paris. As required by the 1998 Agreement, a formal proposal for the establishment of a tyre GTR was proposed to the Executive Committee of the 1998 Agreement (AC.3) by the technical sponsor, France. At the 140th session of the World Forum for Harmonization of Vehicle Regulations (WP.29) on 14 November 2006, the French proposal was approved as a GTR project by AC.3 (ECE/TRANS/WP.29/2006/139). The adopted proposal was published as ECE/TRANS/WP.29/AC.3/15.

10. — Subsequent to that approval, the informal working group on Tyre GTR met on numerous occasions. In addition to three unofficial meetings held between December 2004 and November 2006, another ten meetings were scheduled in conjunction with GRRF sessions and a further two interim meetings were held in Brussels in July 2007 and July 2009.

11. — In 2009, at the request of the informal working group, AC.3 approved the development of the GTR in two phases: the initial phase being dedicated to harmonizing requirements for passenger car tyres only, and requirements for light truck tyres, which carry a C or LT designation, to be harmonized as a second phase. In the interim, the existing requirements for C or LT tyres (albeit non harmonized) are included in the first stage of the GTR for completeness. The current document reflects that decision and contains only harmonized requirements for passenger car tyres, with the LT/C requirements remaining to be harmonized.

12. — Tests or requirements for radial passenger car tyres required extensive harmonization during the course of the informal working group's mandate. These newly harmonized tests or requirements are:

- (a) — High speed test;
- (b) — Physical dimensions test;
- (c) — Required markings.

13. — Several other test requirements for radial passenger car tyres existed only in one of the existing regulations and needed no harmonization. These tests were simply included as direct copies in the GTR for tyres. In particular, no harmonization was required for:

- (a) — Endurance test;
- (b) — Low pressure endurance test;
- (c) — Bead unseating test;

- (d) — Strength test;
- (e) — Rolling sound emission test;
- (f) — Wet grip test;
- (g) — Run flat test.

14. — Harmonizing the high speed test posed a significant challenge in that the two existing tests were quite different from each other and based on different principles. One was designed to ensure that a tyre would perform adequately at speeds well above a national speed limit, but the test requirements were not related to any speed symbol indicated on the tyre itself. The other required that a tyre pass a test at its highest rated speed.

15. — Taking into account the long experience of FMVSS standards in the United States of America and in countries applying Regulation No. 30, and the huge amount of test results corresponding to these two testing procedures, it was decided to base harmonization on a combination of the two existing test procedures rather than develop a wholly new harmonized test procedure. The harmonization work was based on a determination of which test was more onerous for tyres of different speed symbols, and using the best test procedure.


16. — At the meeting of the ad hoc working group in September 2006, three different scenarios for the high speed test harmonization were discussed. One of the options considered was to use the FMVSS 139 high speed test for tyres with a speed rating equivalent to the symbol of "S" and below (less than or equal to 180 km/h), and the Regulation No. 30 test for speed symbols above "S" (greater than 180 km/h). At that meeting, there was a general consensus by the Contracting Parties that this proposal could be considered as a starting point, but it would require significant further work in order to demonstrate the validity of the proposal.

17. — The tyre industry presented a theoretical method to determine, for each speed symbol, the test which is the most severe and to validate that the equivalence point (the speed symbol for which both tests are equally severe) between the two tests is reached at a specific speed symbol. Over the following year the tyre industry gathered data to demonstrate this concept. Six tyre manufacturers supplied data, and in total, 704 tyres were tested using both tests. All the tyres were tested above and beyond the normal high speed test requirements, and the number of steps that each tyre was able to withstand above the regulatory limit, were counted. The ratio of the number of Steps above the Limit (SAL) for the FMVSS 139 test, divided by the number of steps above the limit for Regulation No. 30 test was used to evaluate the data. Based on this extensive set of data, it was determined that the FMVSS 139 high speed test was more severe for tyres with speed symbol of S and below (less than or equal to 180 km/h). The Regulation No. 30 high speed test was more severe for tyres with speed symbols of T (190 km/h) and above.

18. — To validate this concept further, work was undertaken on a smaller sample of tyres to determine the temperature increase during the different tests. In all cases, it was demonstrated that for T rated tyres and above, greater energy input was required (as determined by the increase in the contained air temperature) during the Regulation No. 30 test than from the FMVSS 139 test. This data was also independently confirmed by one of the Contracting Parties. Since the increase in temperature of a tyre should be directly related to the amount of energy supplied during the test, a higher internal tyre temperature at the end of a test indicates a higher degree of severity. At the meeting in September 2008, it was agreed to use the Regulation No. 30 test for tyres with speed symbols of T (190 km/h) and above, and to use the FMVSS 139 high speed test for all lower speed symbols (180 km/h and below).

19. The physical dimensions test was less difficult to harmonize from a technical point of view, because of the elementary simplicity of determining the outside diameter and width of a tyre in its inflated state to ensure interchangeability between tyres marked with the same size designation. A small but not insignificant gain has been achieved by harmonizing the measuring of the tyre's width at four points around the circumference.

20. After the inventory of different tests for passenger car tyres existing in the world had been made, it appeared that some of these tests might be harmonized on a worldwide level, while some of them appeared to have a more regional application. In order to take this situation into account, the technical sponsor of the tyre GTR proposed to organize the different tests into three modules:

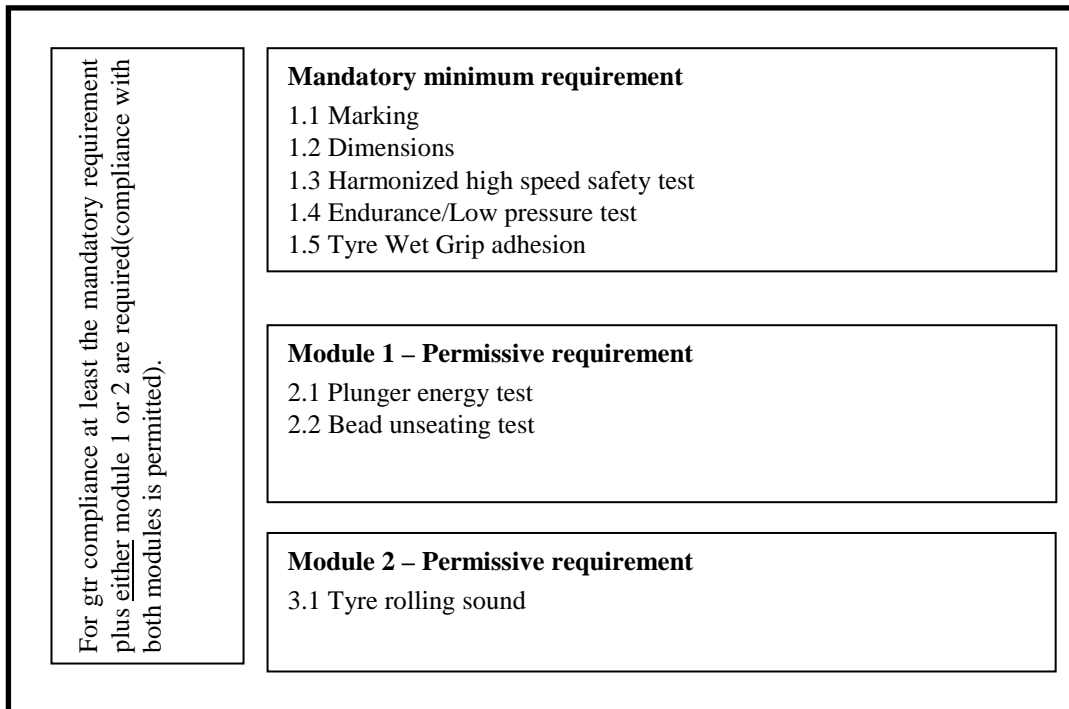

21. This modular structure was described in document ECE/TRANS/WP.29/AC.3/15 that was adopted by AC.3 as the formal request of authorisation to develop the GTR.

22. The informal working group developing the GTR pursued the modular approach. As the group continued to develop the modular approach a wider appreciation among Contracting Parties of the application of modules emerged. This prompted proposals for a less prescriptive approach to some of the individual elements included in the mandatory module. The informal group considered alternatives to deliver the requirements of Contracting Parties while retaining the original modular approach but could not find a sufficiently robust solution. As a result the group proposes a revised structure centred upon a "General Module" plus two options (Options 1 and 2). These are described in the table.

<i>Passenger car tyres</i>		
	<i>Test name</i>	<i>Paragraph(s)</i>
	Marking and tread wear indicators	3.2., 3.3. and 3.4.
	Physical dimensions	3.5.
	High speed test	3.11.

<i>Passenger car tyres</i>		
	<i>Test name</i>	<i>Paragraph(s)</i>
General module	Endurance test	3.9.
	Low pressure test	3.10.
	Wet grip test	3.12.
	Run-flat test	3.13.
Option 1	Strength test	3.6.
	Bead unseating test	3.7.
Option 2	Rolling sound emissions	3.8.

23. — In this initial version of the GTR for tyres, the harmonized requirements apply only to tyres for passenger cars. The module concept does not apply to LT/C tyres and the following table describes the tests applicable to these tyres.

<i>LT/C tyres</i>	<i>C type tyres</i>	<i>LT type tyres</i>
<i>Test name</i>	<i>Paragraphs related to Regulation No. 54</i>	<i>Paragraphs related to FMVSS-139</i>
Marking and tread wear indicators	3.2., 3.3. and 3.4.	3.2., 3.3. and 3.4.
Physical dimensions	3.21.	3.20.
High speed test	3.16.	3.19.
Endurance test	3.16.	3.17.
Low pressure test	None	3.18.
Wet grip test	None	None
Run flat test	None	None
Strength test	None	3.14.
Bead unseating test	None	3.15.
Rolling sound emissions	3.8.	None

23bis. However, since the GTR contains only technical prescriptions and no legal aspects concerning implementation of this GTR in national/regional legislation of the Contracting Parties to the 1998 Agreement, irrespectively to the above described module concept, only a Contracting Party decides how to transpose the GTR provisions into its national/regional legislation. In order to facilitate the transposition process it may be recommended to apply a stepwise approach and for the first stage to select just those provisions and test methods of the GTR, which mostly suit the regulatory needs of a Contracting Party, and to consider, when introducing new performance requirements, the possible trade offs with the other performances. For example, when adopting rolling resistance provisions together with wet grip provisions attention to be put to make sure that one performance is not optimized at the expense of the other. Meanwhile, it is anticipated that a Contracting Party will allow access to its internal market for tyres complying with the provisions of the GTR that the Contracting Party has not adopted if such tyres are in compliance with national/regional legislation of that Contracting Party.



24. — In the case of required markings, it was possible to eliminate some that had become unnecessary over the years, such as the words Radial and Tubeless. Indeed over 90 per cent of passenger car tyres and LT/C tyres sold worldwide are radial and tubeless construction and so continuing to mark tyres is unnecessary. In addition, a change was made in the way the Tyre Identification Number (TIN) will be used in combination with other markings.

25. — The TIN format is based on NHTSA's plan to change the currently assigned 2 digit plant codes to 3 digits. A symbol, the number "1" for example, will be reserved to precede all current 2 digit codes, and be used exclusively for existing plant codes. The "1" would only be used as the prefix for existing 2 digit codes, and not be used as the leading digit for any new 3 digit codes. NHTSA will continue to assign global plant codes and the necessary information to obtain such a code is contained within the UN GTR.

26. — The aim of the tyre GTR is to introduce the universal worldwide harmonized requirements to tyres included into the scope of the UN GTR. In accordance with the provisions of the 1998 Agreement, once the UN GTR is adopted, those Contracting Parties voting in favour of its adoption will start the process of transposing those requirements into their national legislation. In a case when a test procedure includes several options, a Contracting Party may select the option(s) at its discretion.

26bis. In the interests of moving rapidly towards creating a "global tyre" approach the informal group suggests that Contracting Parties transpose the UN GTR requirements in a flexible way to permit tyres complying with the full requirements access to as many markets as possible.

27. — Consideration was given to harmonize the approval markings (both type approval and self certification markings) and discussions on this issue were elevated to WP.29 and AC.3 meetings. It was concluded as not possible currently to adopt a harmonized approval marking since the compliance assessment procedures are not yet harmonized worldwide. So this UN GTR contains no administrative provisions on approval markings. In the absence of a harmonized marking, the Contracting Parties retain the option to assign markings to tyres, especially markings for a "global tyre", and these can be introduced within their national / regional compliance assessment systems.

28. — It is anticipated that the Contracting Parties will incorporate the provisions of the GTR into regulations within their legal framework. This may include applying suitable tyre marking and so help provide for market recognition between the Contracting Parties of tyres complying with the provisions of this UN GTR. Such an approach might encourage wider recognition of harmonized markings and thus further the move towards a single global marking where tyres meet the full requirements established by this UN GTR.

28bis. In parallel to development of this UN GTR, UN Regulation No. 117, which is a base for this UN GTR, had been amended several times by detailing and extending the provisions to tyre wet grip performance, adding the provisions for rolling resistance and for classification as snow tyre for use in severe snow conditions for all tyre classes included in its scope. As harmonization of the newly introduced provisions of UN Regulation No. 117 was not feasible in a reasonable time frame, the decision for this UN GTR was not to consider those provisions for inclusion in the text of the UN GTR at that time. Those new provisions represent the state of the art level and are important for assessment of performance of tyres on the markets worldwide. Therefore at so called "Phase 1b" the relevant provisions aligned with those of UN Regulation No. 117 are introduced by the Amendment No. 1 to this UN GTR.

28ter. The Amendment No. 1 to this UN GTR incorporates:

(a) — Amendment of Part I by adding new paragraphs 4bis, 23bis, 28bis and 28ter;

— (b) — Amendment of Part II:

- (i) ~~Addition of new definitions (Section 2);~~
- (ii) ~~Modification of test for adhesion performance on wet surfaces (Section 3.12);~~
- (iii) ~~Addition of new requirements to rolling resistance (new Section 3.22);~~
- (iv) ~~Addition of new requirements for qualification of a tyre to be designated for use in severe snow conditions (new Section 3.23);~~
- (e) ~~Addition of new Annexes containing the details of the newly added test methods.~~

#### ~~D. Technical and economic feasibility~~

~~29. The tyre GTR has been developed by drawing on the experience of many stakeholders, including regulatory authorities, type approval authorities, tyre and vehicle manufacturers and technical consultants. The UN GTR has been built upon the experience of many organizations and individuals with expertise in the area of tyres for passenger cars and light trucks or light commercial vehicles.~~

~~30. The tyre GTR has been designed to update and improve upon existing regulations, and the requirements are based on existing concepts in different Contracting Parties' present regulations.~~

~~31. Since this UN GTR is based on existing requirements and some harmonized tests, no economic or technical feasibility study was deemed necessary. When transposing this UN GTR into national legislation, Contracting Parties are invited to consider the economic feasibility of the UN GTR in the context of their country.~~

#### ~~E. Anticipated benefits~~

~~32. The principal economic benefit of this regulation will be a reduction in the variety of tests for the same or substantially similar requirements.~~

~~33. Depending on how different Contracting Parties implement this UN GTR, there may be benefits due to the way the approval markings are treated. Tyre mould design and fabrication might be rationalized, with associated reductions in production costs.~~

~~34. Safety benefits resulting from the transposition of the UN GTR in the national legislations depend on the previous level of the national regulations.~~

#### ~~F. Potential cost effectiveness~~

~~35. It is not possible to assess, at this moment, the total costs linked to the UN GTR. On one hand, there are more tests in the UN GTR than in the existing national or international regulations; on the other hand the harmonization of the regulation will reduce the global cost of type approval in the variety of countries which will apply the UN GTR through that administration procedure.~~

~~36. Safety benefits are anticipated, but it is not yet possible to assess them in terms of reduction of number of accidents and victims.~~

## ~~G. Specific statement of technical rational and Justification for Amendment 1 to UN GTR No. 16~~

### ~~A. Objective~~

~~37. The objective of Amendment 1 is to develop, in the framework of the 1998 Agreement, an amendment to UN GTR No. 16 on tyres aimed at adaptation of UN GTR No. 16 to the technical progress by including the newly developed provisions to wet grip performance, rolling resistance and qualification for use at severe snow conditions both for passenger car (PC) and light truck / commercial (LT/C) tyres, recently adopted within UN Regulation No. 117. The approved changes in the relevant Federal Motor Vehicle Safety Standards (FMVSS) and UN Regulations Nos. 30 and 54 also had been included.~~

### ~~B. Introduction and procedural background~~

~~38. UN GTR No. 16 on tyres was established in the Global Registry on 13 November 2014. The informal working group on the Tyre GTR was challenged by reaching harmonization of technical provisions making those acceptable both for type approval and self-certification compliance assessment systems.~~

~~39. Meanwhile, in parallel to development of UN GTR No. 16, UN Regulation No. 117, which is a base for UN GTR No. 16, had been amended several times by inclusion of the provisions to tyre wet grip performance, rolling resistance and qualification for use at severe snow conditions for all tyre classes included in its scope. The other base UN Regulations Nos. 30 and 54 were also subjects to certain amendments, and the relevant provisions of UN GTR No. 16 became needed to be aligned.~~

~~40. As harmonization of the newly introduced provisions of UN Regulation No. 117 was not feasible in a reasonable time frame, the decision for draft UN GTR on tyres was not to consider those provisions for inclusion in the text of GTR at the time of its development.~~

~~41. As the aforesaid new provisions of UN Regulation No. 117, as well as those of UN Regulations Nos. 30 and 54 represent the state of the art level and are important for assessment of performance of tyres on the markets worldwide, at the 79th GRRE session the decision was made to prepare a draft amendment keeping in line the UN GTR on tyres with the latest regulatory developments (ECE/TRANS/WP.29/GRRE/79, para. 27).~~

~~42. The European Tyre and Rim Technical Organisation (ETRTO) agreed to prepare a draft Amendment No. 1 to UN GTR No. 16 considered as Phase 1b of the development of the UN GTR on tyres. The Government of the Russian Federation assumed the duties of the technical sponsor for that development.~~

### ~~C. Justification of changes~~

#### ~~(a) Amendment of Part I~~

~~43. This Amendment 1 incorporates four new paragraphs in Part I of UN GTR No. 16: 4bis, 23bis, 28bis and 28ter.~~

~~44. Paragraph 4bis is added for information for further anticipated amendments in UN GTR No. 16 to be followed the results of current rulemaking activities in the United States in the field of the Strength test for passenger car tyres (UN GTR No. 16 Section 3.6) and the Tubeless tyre bead unseating resistance test for passenger car tyres (UN GTR No. 16 Section 3.7). Following additional technical evaluation of the adhesion performance on wet surfaces (section 3.12), a future additional category of use might be necessary for certain tyre types typical in the North American market.~~

~~45. — Paragraph 23bis provides for additional clarification that no legal aspects concerning implementation of this UN GTR in national/regional legislation of the Contracting Parties to the 1998 Agreement is provided within the text of this UN GTR, therefore the way of transposition of the GTR provisions into its national/regional legislation is at the discretion of the Contracting Parties. In this regard, paragraph 23bis contains recommendations on anticipated practice of transposition of the provisions of this GTR into national/regional legislation of the Contracting Parties providing for facilitation of the transposition process. The recommendations of paragraph 23bis are partly based on the developments of the WP.29 Informal Group dealing with the development of the procedure of International Whole Vehicle type Approval (IWVTA).~~

~~46. — Paragraph 26 has been amended to clarify that when a test procedure includes several options, a Contracting Party may select the option(s) at its discretion.~~

~~47. — Paragraphs 28bis and 28ter briefly explain the objective and the content of this Amendment 1 to the UN GTR No. 16). These two paragraphs are added for clarity and refreshment of history, when this Amendment No. 1 will be incorporated into the main text of the GTR.~~

~~(b) *Amendment of Part II*~~

~~48. — See the Technical Report on the development of Amendment 1, para. 16 (i)~~

## II. Text of the global technical regulation

### 1. Scope

- 1.1 This global technical regulation covers new radial pneumatic tyres referred to as 'tyres'<sup>[AR4]</sup> in this document designed primarily for vehicles in Categories 1 and 2, all with a gross vehicle mass of 4,536 kg or less, as defined in the Special Resolution No. 1.<sup>1</sup>
- 1.2. It does not apply to:
- (a) T-Type temporary use spare tyres;
  - (b) Tyres having a nominal rim diameter code  $\leq 8$  (or  $\leq 203$  mm).
- 1.3. Contracting Parties may also optionally decide to exclude:
- (a) Special Tyres (ST) for trailers in highway service;
  - (b) LT or C tyres with tread-depth of greater than or equal to 14.3 mm (18/32 inch).

### 2. Definitions

For the purpose of this regulation the following definitions apply:

- 2.1. "Acceleration test" means a series of specified number of traction controlled acceleration test runs of the same tyre repeated within a short timeframe;
- 2.2. "Adhesion on wet surfaces" means the relative braking performance, on a wet surface, of a test vehicle equipped with the candidate tyre in comparison to that of the same test vehicle with a Standard Reference Test Tyre (SRTT);
- 2.3. "Basic tyre functions" means the nominal capability of an inflated tyre in supporting a given load up to a given speed and transmitting the driving, the steering and the braking forces to the ground on which it runs;
- 2.4. "Bead" means the part of the tyre which is of such shape and structure as to fit the wheel rim and hold the tyre on it;
- 2.5. "Bead separation" means a breakdown of the bond between components in the tyre bead area;
- 2.6. "Braking force of a tyre" means the longitudinal force, expressed in newton, resulting from braking torque application;
- 2.7. "Braking force coefficient of a tyre (BFC)" means the ratio of the braking force to the vertical load;
- 2.8. "Braking test" means a series of a specified number of ABS-braking test runs of the same tyre repeated within a short time frame;
- 2.9. "Brand name/trademark" means the identification of the brand or trademark as defined by the tyre manufacturer and marked on the sidewall(s) of the tyre.

<sup>1</sup> Document ECE/TRANS/WP.29/1045, as amended.

The brand name/trademark may be the same as that of the manufacturer." [AR5]

- 2.10. "*Candidate tyre(s)*" means a tyre or a tyre set that is tested for the purpose of calculating its wet or snow grip index;
- 2.11. "*Capped inflation*" means the process of inflating the tyre and allowing the inflation pressure to build up as the tyre is warmed up while running;
- 2.12. "*Carcass*" means that part of the tyre [N6] structure other than the tread and sidewall rubber, which, when inflated, bears the load;
- 2.13. "*Chunking*" means the breaking away of pieces of the tread or sidewall;
- 2.14. "*Class C1 tyres*" means tyres designed primarily for vehicles of Category 1-1 of Special Resolution No. 1;
- 2.15. "*Class C2 tyres*" means tyres designed primarily for vehicles of Categories 1-2 and 2 of Special Resolution No. 1 with a load index in single formation  $\leq 121$  and the speed symbol  $\geq$  "N";
- 2.16. "*Class C3 tyres*" means tyres designed primarily for vehicles of Category 2 of Special Resolution No. 1 with a load index in single formation  $\leq 121$  and the speed symbol  $\leq$  "M", or with a load index in single formation  $\geq 122$ ;
- 2.17. "*Control tyre*" means a normal production tyre that is used to establish the wet grip or snow grip performance of tyre sizes unable to be fitted to the same vehicle as the standard reference test tyre ;
- 2.18. "*Cord*" means the strands or filaments of material forming the plies of the tyre structure;
- 2.19. "*Cord separation*" means the parting of cords from adjacent rubber compounds;
- 2.20. "*Coupling (hitch) height*" means the height when measured perpendicularly from the centre of the articulation point of the trailer towing coupling or hitch to the ground, when the towing vehicle and trailer are coupled together. The vehicle and trailer shall be standing on level pavement surface in its test mode complete with the appropriate tyre(s) to be used in the particular test;
- 2.21. "*CP tyre*" means a commercial vehicle tyre for service on motor caravans;
- 2.22. "*Cracking*" means any parting within the tread, sidewall or inner liner of the tyre which may or may not extend to cord material;
- 2.23. "*Deflected section height*" is the difference between the deflected radius, measured from the centre of the rim to the surface of the drum, and one half the nominal rim diameter as defined in ISO 4000-1:2010;
- 2.24. "*Extra Load*" means a pneumatic-tyre structure designed to carry more load at a higher inflation pressure than the load carried by the corresponding standard version tyre at the standard inflation pressure as specified in ISO 4000-1:2010;
- 2.25. "*Flat tyre running mode*" describes the state of the tyre, essentially maintaining its structural integrity, while operating at an inflation pressure between 0 and 70 kPa, for runflat tyres or systems;

**[2.2.X High Flotation]**

- 2.26. "Inner liner" means the layer of rubber forming the inside surface of a tubeless tyre that contains the inflating medium within the tyre;
- 2.27. "Inertia or Moment of Inertia" means the ratio of the torque applied to a rotating body to the rotational acceleration of this body<sup>2</sup>;
- 2.28. "Intended outboard sidewall" means the sidewall that contains a whitewall, bears white lettering, or bears manufacturer or model name moulding that is higher or deeper than that on the other sidewall of the tyre;
- 2.29. "Laboratory Control Tyre" means the tyre used by an individual laboratory to control machine behaviour as a function of time;
- 2.30. "Light Load tyre (LL)" means a tyre designed for loads lower than the standard load (SL) version;
- 2.31. "Light truck (Commercial) tyre" means a tyre of a group prescribed in the "LT" Light Truck or "C" Commercial tyre section of the standards manuals of the organizations shown in Annex 7;
- 2.32. "Load index" means one or two numbers which indicate the load the tyre can carry in single or in single and dual operation at the speed corresponding to the associated speed category. A type of tyre<sup>[N7]</sup> can have either one or two sets of load indices. The list of these indices and their corresponding loads is given in Annex 2;
- 2.33. "Load capacity variation with speed" means an authorized variation of the reference mass, as indicated by the load index, based on the actual in-use speed in comparison with the capabilities indicated by the service description (see Annex 5);
- 2.34. "Load range" means a letter (B, C, D, or E) used to identify a given LT and C size tyre with its load classification and inflation limits, as per table below<sup>[N8]:</sup> |  
[AR9]

---

<sup>2</sup> The rotating body can be, for example, a tyre assembly or machine drum.<sup>pi</sup>

kPa Range kPa Pressure For Max. Load	Load range for Nominal section width	
Nominal section width mm (*)	Up to ≤295	304-395 >295
	code ≤11.5	>11.5
Inflation Pressure for maximum load rating (delete row)		
170-199	/	B
200-299	B	C
300-399	C	D
400-499	D	E
500-599	E	

[AR10] See Annex 6 for non-metric tires. [AR11]

2.35. "Lockup of a wheel" means the condition of a wheel in which its rotational velocity about the wheel spin axis is zero and it is prevented from rotating in the presence of applied wheel torque;

2.33. Manufacturer: means the person or body who is responsible to the Regulatory Authority for all aspects of the approval or certification and for ensuring the conformity of production. [AR12]

2.36. "Measurement reproducibility  $\sigma_m$ " means the capability of a machine to measure rolling resistance<sup>3</sup>;

2.37. "Maximum application load capacity" means the maximum mass a tyre can support in a specific application, and is dependent on the speed symbol of the

<sup>3</sup> Measurement reproducibility  $\sigma_m$  shall be estimated by measuring n times (where  $n \geq 3$ ), on a single tyre, the whole procedure described in paragraph 3.22.5. as follows:

$$\sigma_m = \sqrt{\frac{1}{n-1} \cdot \sum_{j=1}^n \left( Cr_j - \frac{1}{n} \cdot \sum_{j=1}^n Cr_j \right)^2}$$

Where:

j = is the counter from 1 to n for the number of repetitions of each measurement for a given tyre,

n = number of repetitions of tyre measurements ( $n \geq 3$ ).

$C_r$  = coefficient of rolling resistance measured



tyre, the maximum design speed of the vehicle on which the tyre is fitted, the inflation pressure and the camber angle of the wheels of the vehicle;

- 2.38. "*Maximum load rating*" means the load corresponding to the load index;
- 2.39. "*Maximum permissible inflation pressure*" means the maximum cold inflation pressure to which the tyre may be inflated;
- 2.40. "*Mean fully developed deceleration ("mfdd")*" means the average deceleration calculated on the basis of the measured distance recorded when decelerating a vehicle between two specified speeds;
- 2.41. "*Measuring rim*" means an actual rim of specified width as defined by one of the standards organizations as specified in Annex 7, on which the tyre is fitted for measuring the physical dimensions;
- 2.42. "*Nominal aspect ratio (profile)*" means the ratio of the nominal section height to the nominal section width expressed as a percentage in a multiple of 5 (ending in 0 or 5);
- 2.43. "*Nominal section width*" shall be indicated in millimetres, and this part of the designation shall end in either the number zero or five, so that in any single series of tyres with the same nominal aspect ratio, the values shall all end in "0" or they shall all end in "5";

**For the existing types of tyres whose designation is given in the first column of the tables in Annex 6 to this regulation, the nominal section width shall be deemed to be that given opposite the tyre designation in those tables.**

- 2.44. "*Normal tyre*" means a tyre intended for normal on-road use; [AR13]
- 2.45. "*Open splice*" means any parting at any junction of tread, sidewall, or inner liner that extends to cord material;
- 2.46. "*Outer diameter*" means the overall diameter of an inflated new tyre;
- 2.47. "*Overall width*" means the linear distance between the outsides of the sidewalls of an inflated ~~pneumatic~~ pneumatic tyre, including elevations due to labelling (marking), decorations, and/or protective bands or ribs;
- 2.48. "*Parasitic loss*" means loss of energy (or energy consumed) per unit distance excluding internal tyre losses, attributable to aerodynamic loss of the different rotating elements of the test equipment, bearing friction and other sources of systematic loss which may be inherent in the measurement;
- 2.49. "*Passenger tyre*" means a tyre of a group prescribed in the passenger tyre section of the standards manuals from one of the organizations shown in Annex 7;
- 2.50. "*Peak brake force coefficient ("pbfc")*" means the maximum value of a tyre braking force coefficient that occurs prior to wheel lockup as the braking torque is progressively increased;
- 2.51. "*Ply*" means a layer of rubber-coated parallel cords;
- 2.52. "*Ply separation*" means a parting of adjacent plies;
- 2.53. "*~~Pneumatic~~ Pneumatic tyre*" means a form of tyre comprising a reinforced flexible envelope which is either provided with, or forms in conjunction with

the wheel upon which it is mounted, a continuous, closed, essentially toroidal chamber containing a gas, (usually air), or gas and a liquid, which is intended to be used at a pressure greater than atmospheric pressure. A ~~pneumatic~~ ~~pneumatic~~ tyre may be classified as a passenger tyre (see "passenger tyre" above), or a light truck (commercial) tyre, (see "light truck (commercial) tyre" above), depending on the service duty conditions required for any specific application;

- 2.54. "Principal grooves" means the wide circumferential grooves positioned in the central zone of the tyre tread, which, in the case of passenger and light truck (commercial) tyres, have the tread wear indicators located in the base;
- 2.55. "Professional off-road tyre" is a special use tyre primarily used for service in severe off-road conditions;

In order to be classified as a 'professional off-road tyre', a tyre shall have all of the following characteristics:

- (a) For C1 and C2 tyres:
- (i) A tread depth  $\geq 11$  mm;
  - (ii) A void-to-fill ratio  $\geq 35$  per cent;
  - (iii) A maximum speed symbol  $\leq Q$ .
- (b) For C3 tyres:
- (i) A tread depth  $\geq 16$  mm;
  - (ii) A void-to-fill ratio  $\geq 35$  per cent;
  - (iii) A maximum speed symbol  $\leq K$ .

- 2.56. Pressure Index ("PSI") is a code identifying the inflation pressure for the dimension measurement (section 3.20.5.1.) and for the load/speed endurance test (section 3.16) [TN14] which may be used during testing of tyres as shown in Annex 4;

The inflation pressure for the dimension measurement and for the load/speed endurance test shall may be indicated directly in kilopascals, replacing the Pressure index ("PSI "). [AR15][AR16]

- 2.57. "Radial ply tyre" means a ~~pneumatic~~ ~~pneumatic~~ tyre structure in which the ply cords that extend to the beads are laid at substantially 90° to the centreline of the tread, the carcass being restrained by circumferential belts of 2 or more layers of substantially inextensible cord material;
- 2.58. "Rim" means that part of the wheel forming the support for the tyre and on which the tyre beads are seated;
- 2.59. "Rim protector" means a feature (for example: a protruding circumferential rubber rib) incorporated into the lower sidewall area of the tyre which is intended to protect the rim flange from damage;

- 2.60. "Rolling resistance coefficient  $C_r$ " means the ratio of the rolling resistance to the load on the tyre<sup>4</sup>;
- 2.61. "Rolling resistance  $F_r$ " means the loss of energy (or energy consumed) per unit of distance traveled<sup>5</sup>;
- 2.62. "Run flat tyre" or "Self-supporting tyre" describes a ~~pneumatic~~ ~~pneumatic~~ tyre structure provided with any technical solutions (for example, reinforced sidewalls, etc.) allowing the ~~pneumatic~~ ~~pneumatic~~ tyre, mounted on the appropriate wheel and in the absence of any supplementary component, to supply the vehicle with the basic tyre functions, at least, at a speed of 80 km/h (50 mph) and a distance of 80 km when operating in flat tyre running mode;
- 2.63. "Run flat system" or "Extended mobility system" describes an assembly or specified functionally dependant components, including a tyre, which together provide the specified performance granting conditions for the vehicle with at least basic tyre functions, at a speed of 80 km/h (50 mph) and a distance of 80 km (50 miles) when operating in flat tyre running mode;
- 2.64. "Secondary grooves" means the supplementary grooves of the tread pattern which may disappear in the course of the tyre's life;
- 2.65. "Section height" means a distance equal to half the difference between the outer diameter of the tyre and the nominal rim diameter;
- 2.66. "Section width" means the linear distance between the outside of the sidewalls of an inflated ~~pneumatic~~ ~~pneumatic~~ tyre, excluding elevations due to labelling (marking), decoration or protective band or ribs;
- 2.67. "Service description" means the association of the load index or indices with a speed symbol (for example, 91H or 121/119S);
- 2.68. "Sidewall" means that portion of a tyre between the tread and the bead;
- 2.69. "Sidewall separation" means the parting of the rubber compound from the cord material in the sidewall;
- 2.70. "Skim test reading" means the type of parasitic loss measurement, in which the tyre is kept rolling without slippage, while reducing the tyre load to a level at which energy loss within the tyre itself is virtually zero;
- 2.71. "Snow grip index (SG)" means the ratio between the performance of the candidate tyre and the performance of the standard reference test tyre;
- 2.72. "Snow tyre" means a tyre whose tread pattern, tread compound or structure is primarily designed to achieve in snow conditions a performance better than that of a normal tyre with regard to its ability to initiate or maintain vehicle motion;
- 2.73. "Snow tyre for use in severe snow conditions" means a snow tyre whose tread pattern, tread compound or structure is specifically designed to be used in severe snow conditions and that fulfils the requirements in paragraph ~~3.23~~ ~~3.22~~ ; [AR17]

<sup>4</sup> The rolling resistance is expressed in newton and the load is expressed in kilo-newton. The rolling resistance coefficient is dimensionless.

<sup>5</sup> The International System of Units (SI) unit conventionally used for the rolling resistance is the newton-meter per meter, which is equivalent to a drag force in newton.

- 2.74. "Special Tyres (ST) for trailers in highway service" means a tyre having the ST prefix or suffix in the tyre size. These tyres have higher allowable loads than the corresponding sized tyres without the ST designation and consequently are only allowed for use on trailers;
- 2.75. "Special use tyre" means a tyre intended for mixed use, both on and/or off road or for other special service duty. These tyres are primarily designed to initiate and maintain the vehicle in motion in off-road conditions;
- In order to be classified as a "special use tyre" a tyre shall have a block tread pattern in which the blocks are larger and more widely spaced than for normal tyres and have the following characteristics:
- For C1 tyres: a tread depth  $\geq$  11 mm and void to fill ratio  $\geq$  35 per cent
- For C2 tyres: a tread depth  $\geq$  11 mm and void to fill ratio  $\geq$  35 per cent
- For C3 tyres: a tread depth  $\geq$  16 mm and void to fill ratio  $\geq$  35 per cent
- 2.76. "Speed symbol" means the letter code which defines the maximum speed which the tyre can sustain, (see Annex 1 to this regulation);
- 2.77. "Standard Reference Test Tyre (SRTT)" means a reference tyre that is produced, controlled and stored in accordance with the ASTM (American Society for Testing and Materials) standards: The following SRTT's are used for the purpose of this regulation, [N18]
- (a) E1136 for the size P195/75 R 14
  - (b) F2493 for the size P225/60 R 16
  - (c) F2872 for the size 225/75 R 16 C
  - (d) F2871 for the size 245/70 R 19.5
  - (e) F2870 for the size 315/70 R 22.5
- 2.78. "Structure" means the technical characteristics of the tyre's carcass (for example: radial, bias-belted, bias ply, etc.);
- 2.79. "SRTT14" means the ASTM E 1136-93 (~~Reapproved 2003~~), Standard Specification for a Radial Standard Reference Test Tire P195/75R14;
- 2.80. "SRTT16" means the ASTM F 2493-08, Standard Specification for a Radial Standard Reference Test Tire P225/60R16;
- 2.81. "Temporary use spare tyre" means a tyre different from a tyre fitted to a vehicle for normal driving conditions, and intended only for temporary use under restricted driving conditions;
- 2.82. "Test rim" means the rim on which a tyre is fitted for testing and which may be any rim listed in industry standards as appropriate for use with that tyre;
- 2.83. "Test run" means a single pass of a loaded tyre over a given test track surface;
- 2.84. "Test tyre(s)" means a candidate tyre, a reference tyre or a control tyre or tyre set that is used in a test run;
- 2.85. "Theoretical rim" means a rim width calculated by multiplying the nominal section width by a specific, industry standardized, coefficient depending upon the aspect ratio of the tyre;

- 2.86. "*Spin traction test*<sup>[N19]</sup>" means a series of a specified number of spin-traction<sup>[N20]</sup> test runs according to ASTM standard F1805 of the same tyre repeated within a short time frame;
- 2.87. "*Traction tyre*" means a tyre in Class C2 or C3 bearing the inscription TRACTION and intended to be fitted primarily to the drive axle(s) of a vehicle to maximize force transmission in various circumstances;
- In order to be classified as a "traction tyre", a tyre is required to meet at least one of the following conditions:
- The tyre shall have a tread pattern with minimum two circumferential ribs, each containing a minimum of 30 block-like elements, separated by grooves and/or sipe elements the depth of which has to be minimum of one half of the tread depth.
- 2.## Trade description/commercial name: means an identification of a range of tyres as given by the tyre manufacturer. It may coincide with the brand name/trademark<sup>[AR21]</sup>;
- 2.88. "*Tread*" means that part of a tyre that comes into contact with the road;
- 2.89. "*Tread pattern groove*" means the space between two adjacent ribs or blocks in the tread pattern;
- 2.90. "*Tread depth*" means the depth of the principal grooves;
- 2.91. "*Tread pattern*" means the geometric arrangement of blocks, ribs and grooves of the tread;
- 2.92. "*Tread separation*" means the pulling away of the tread from the tyre carcass;
- 2.93. "*Tread Wear Indicators (TWI)*" means the projections within the principal grooves designed to give a visual indication of the wear of the tread;
- 2.94. "*Tubeless tyre*" means a tyre specifically designed for fitting to appropriate wheel rims without an inner tube;
- 2.95. "*T-type temporary use spare tyre*" means a type of temporary use spare tyre designed for use at inflation pressures higher than those established for standard and extra load tyres;
- 2.96. "*Tyre size designation*" means a combination of letters, numbers and symbols which uniquely identify the size and structure of the tyre as set out in one of the standards of the organizations listed in Annex 7 or in the tables in Annex 6 to this regulation;
- 2.97. "*Tyre test vehicle*" means a dedicated special purpose vehicle which has instruments to measure the vertical and the longitudinal forces on one test tyre during braking;
- 2.98. "*Vertical load*" means the load in newton imposed on the tyre perpendicular to the road surface;
- 2.99. "*Void to fill ratio*" means the ratio between the area of voids in a reference surface and the area of this reference surface calculated from the mould drawing;
- 2.100. "*Wet grip index ("G")*" means the ratio between the performance of the candidate tyre and the performance of the standard reference test tyre.

- 2.101. "Test speed" means when the test steel drum rotates, the drum surface is along the circumferential line speed.
- 2.102. "Light truck tyre" means tyres designed for micro vehicles or light commercial vehicles, which fall under the category of truck tyres.
- 2.103. "Mud and snow tyre" means tyres whose tread pattern and structure are primary designed to achieve in snow or muddy conditions a performance better than that of a normal tyre with regard to its ability to initiate or maintain vehicle motion.
- 2.104. "Snow tyre" means tyres whose tread pattern, tread compound and structure are primary designed to achieve in snow conditions a performance better than that of a normal tyre with regard to its ability to initiate, maintain or stop vehicle motion.
- 2.105. "Peripheral dimension" means the tyre outer circumference, cross-section width and other dimensions measured when the tyre is mounted on the specified wheel and inflated to the specified pressure.
- 2.106. "Overall circumference" means the circumference of the outermost surface of the tyre tread.
- 2.107. "Breaking energy" means the energy required for the pressure head to press the tyre crown.

### 3. Requirements

- 3.1. Plant codes
- 3.1.1. Plant code registration for manufacturers with a representative in the United States of America
- 3.1.1.1. Each tyre manufacturer of new ~~pneumatic~~ ~~pneumatic~~ tyres shall apply in writing to the following address for registration and allocation of a manufacturer plant code identification symbol:
- Office of Vehicle Safety Compliance  
National Highway Traffic Safety Administration  
1200 New Jersey Avenue, SE  
Washington, D.C. 20590, United States of America
- 3.1.1.2. The tyre manufacturer requesting a plant code assignment shall identify itself as the tyre manufacturer and declare the following information in the application and shall inform the NHTSA of any changes to the information:
- 3.1.1.3. The name or other designation identifying the applicant, and its main office address;
- 3.1.1.4. The name, or other identifying designation, of each individual plant operated by the manufacturer and the address of each plant, if applicable;
- 3.1.1.5. The type of tyres manufactured at each plant, e.g., ~~pneumatic~~ ~~pneumatic~~ tyres for passenger cars, buses, trucks or motorcycles; ~~pneumatic~~ ~~pneumatic~~ retreaded tyres; or ~~non pneumatic~~ ~~retreaded~~ tyres; or ~~non pneumatic~~ ~~tyre assemblies~~. [AR22]

- 3.1.2. Plant code for manufacturers with no specified representative in the United States of America
- 3.1.2.1. The plant code for tyres manufactured by companies with no specified representative in the United States of America shall be 999.
- 3.2. Marking
- 3.2.1. The Tyre Identification Number is a series of numbers, letters and spaces in the format `YYY_MMMMMM_DDDD`.
- 3.2.1.1. The YYY is a 3 digit universal plant code for the place of manufacture of the tyre.
- 3.2.1.2. The MMMMM is a 6 digit manufacturer's code. Within the tyre identification number format, this shall be an 6 digit required field, but the content is up to the tyre manufacturer.
- 3.2.1.3. The DDDD with 4 digits represents the week and year of manufacture, also known as the date code. The first two symbols shall identify the week of the year by using "01" for the first full calendar week in each year, "02" for the second full calendar week, and so on. The calendar week runs from Sunday through the following Saturday. The final week of each year shall include not more than 6 days of the following year. The third and fourth symbols shall identify the year. Example: 0110 means the first week of 2010.
- 3.2.1.4. The Tyre Identification Number shall be located on the intended outboard sidewall of the tyre, and positioned between the bead and 50 per cent of the distance from the bead to the tread. On the other sidewall of the tyre either a tyre identification number or a partial tyre identification number is required. The partial tyre identification number is comprised of all characters except the date code. If the tyre has no intended outboard sidewall, the complete tyre identification number shall be placed on one sidewall, and a partial or complete tyre identification number shall be placed on the other sidewall.
- 3.2.1.5. The symbols to be used in the tyre identification number format are A, B, C, D, E, F, H, J, K, L, M, N, P, R, T, U, V, W, X, Y, 1, 2, 3, 4, 5, 6, 7, 8, 9, 0.
- 3.2.1.6. The symbols that shall not be used are G, I, O, Q, S, and Z.
- 3.2.1.7. The font to be used for the Tyre Identification Number shall be Futura Bold, Modified Condensed, Gothic, or OCR-B (as defined in ISO 1073-2: 1976).
- 3.2.1.8. The characters shall have a height of at least 6 mm and a positive or negative relief of between 0.5 to 1.0 mm, as measured from the surface in the immediate vicinity of the marking.
- 3.3. Other sidewall markings
- 3.3.1. Unless otherwise stated in this UN GTR, the following information, together with any other markings required by provisions in annexes to this regulation, shall be legibly and permanently moulded into or onto the sidewall(s):
- 3.3.1.1. in the case of asymmetric tyres on the intended outboard sidewall as viewed when the tyre is fitted to the vehicle;
- 3.3.1.2. In either case, on at least one sidewall, the required markings shall be in a position on the sidewall where they are least susceptible to being "scrubbed" away during use;
- 3.3.1.2.1. The manufacturer's name or the Brand name/trademark in

characters not less than 4 mm high;

3.3.1.2.2 The trade description/commercial name (see paragraph 2.4. of this Regulation) in characters not less than 4 mm high;. However, the trade description is not required when it coincides with the Brand name/trademark.

[AR23]

3.3.1.2.2. The country of manufacture in characters not less than 2 mm high;

3.3.1.2.3. The tyre size designation in characters not less than 6 mm high comprising:

3.3.1.2.3.1. An indication of the tyre structure;

3.3.1.2.3.1.1. R for radial construction;

3.3.1.2.3.1.2. RF for radial run flat tyre;

3.3.1.2.3.2. The service description (load index and speed symbol);

3.3.1.2.3.3. An identification of the tyre to rim fitment configuration when it differs from the standard configuration.

3.3.1.2.3.3.1. In the case of LT and C type tyres, the words "Load Range" or "LR" followed by the letter designating the tyre load range "B, C, D, or E". This marking is at the discretion of the Contracting Parties implementing the GTR.16 optional.

3.3.2. Each tyre shall be labelled on the other side (from that directed in paragraph 3.2.1.4. above) with the same tyre identification number except for the date code and, at the discretion of the manufacturer, any optional code on the other sidewall.

3.3.3. For tyres suitable for speed in excess of 300 km/h, the letter "R" placed in front of the rim diameter code symbol marking shall be replaced by "ZR" and the tyre shall be marked, in parentheses, with a service description consisting of the speed symbol "Y" and a corresponding load index, for example, 245/45ZR17 (95 Y).

*Note:* The actual maximum tyre load capacity and speed capability shall be stated in the tyre manufacturer's technical literature and made available to the public.

3.3.4. For passenger car tyres, each tyre shall be labelled with its maximum permissible inflation pressure in kPa (psi) and shall be labelled with its maximum load rating in kilograms (lbs).

3.3.5. In the case of LT or C type tyres, the maximum load rating and corresponding inflation pressure of the tyre, shown as follows:

"Max load single \_\_\_kg (\_\_\_lb) at \_\_\_kPa (\_\_\_psi) cold";

"Max load dual \_\_\_kg (\_\_\_lb) at \_\_\_kPa (\_\_\_psi) cold".

For LT and C type tyres rated for single fitment only, mark as follows:


"Max load \_\_\_kg (\_\_\_lb) at \_\_\_kPa (\_\_\_psi) cold".

3.3.6. The inscription "EXTRA LOAD" or "XL" for extra load tyres, or the inscription "LL" or "LIGHT LOAD" for light load tyres, if applicable, in characters not less than 4 mm high;


3.3.7. The word "TUBETYPE", if applicable, in characters not less than 4 mm high;



- 3.3.8. The inscription "M+S", "M.S.", "M&S", "M-S", or "M/S", in characters not less than 4 mm high, if the tyre is a snow tyre ~~or if the tyre is a special use tyre;~~ [AR24] [AR25]
- 3.3.9. The "Alpine" symbol ("3-peak-mountain with snowflake") which identifies a snow tyre classified as "snow tyre for use in severe snow conditions". The symbol shall have a minimum base of 15 mm and a minimum height of 15 mm and shall contain three peaks with the middle peak being the tallest. Inside the mountain, there shall be a six-sided snowflake having a minimum height of one-half the tallest peak. An example is shown below, and is to be placed adjacent to an inscription as listed in paragraph 3.3.8.



- 3.3.10. The symbol below if the tyre is a "run flat" or "self-supporting" tyre, and performance requirements for run flat tyres are met as per paragraph 3.13., where "h" is at least 12 mm.

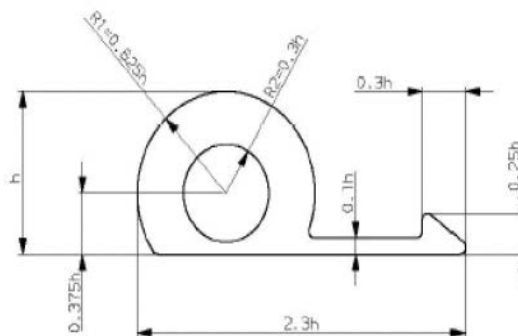

- 3.3.11. In the case of LT or C type tyres, an indication, by the **Pressure<sup>PSI</sup>** index ("**PSI**"), of the inflation pressure to be adopted for the load/speed endurance tests. A table showing the relationship among **Pressure index ("**PSI**")** and "kPa" units is listed in Annex 4.
- 3.3.12. In the case of LT or C type tyres classified as "traction tyre", the inscription "TRACTION" ;
- 3.3.13. In the case of LT or C type tyres, the inscription "ET" or "ML" or "MPT" and / or "POR" for "Special use tyres":
- 3.3.13.1. ET = Extra Tread;
- 3.3.13.2. ML = Mining and Logging tyre used in intermittent highway service;
- 3.3.13.3. MPT = Multi-Purpose Truck tyres.
- 3.3.13.4. POR = Professional Off-Road tyres.

~~3.3.13.5 In addition, they may also bear the inscription M+S or M.S or M&S. [AR26][AR27]~~

3.3.14. In the case of LT or C type tyres, the prefix "LT" before the tyre size designation, or the suffix "C" or "LT" after the rim diameter marking referred to in Annex 3, and, if applicable, after the tyre to rim fitment configuration referred to in paragraph 3.3.1.2.3.3. or the suffix "LT" after the service description

3.3.15. In the case of LT or C type tyres, the suffix "CP" after the rim diameter marking referred to in Annex 3 and, if applicable, after the tyre to rim fitment configuration referred to in paragraph 3.3.1.2.3.3. This marking is mandatory in the case of tyres fitted on 5° drop centre rims, having a load index in single operation lower or equal to 121 and specifically designed for the equipment of motor caravans.

**3.3.16 Following marks should appear on the sidewall of each tyre,**

**a) Specification;**

**b) Trade mark and manufacture's name or plant address;**

**c) Load index or ply rating, loading capacity, inflation pressure;**

**d) Speed symbol;**

**e) Name (or code) of framework material of crown and sidewall;**

**f) Marks of treadwear indicator's location;**

**g) Production code;**

**h) Inspection mark upon delivery from plant.**

**In which, a)–f) are moulded marks, g) is permanent mark, h) is marks unable to wash off.**

**3.3.17 Radial tyre shall be moulded with "RADIAL" marking, tubeless tyre shall be moulded with "TUBELESS" marking.**

**3.3.18 Mini-type truck tyres shall be moulded with "ULT" marking, Light truck tyres shall be moulded with "LT" marking.**

**3.3.19 Tyre with driving direction for tread pattern shall be moulded with driving direction marking.**

**3.3.20 Snow and mud tyre shall be moulded with snow and mud pattern marking.**

**3.3.21 Snow tyre should be moulded with snow tyre marking.**

**3.3.22 Special purpose trailer tyres should be moulded with "ST" marking.**

**3.3.23 Regroovable tyres should be moulded with "REGROOVABLE" marking.**

- 3.4. Tread wear indicators
- 3.4.1. Except as noted below, each passenger tyre and each LT/C tyre shall have at least six transverse rows of tread wear indicators, approximately equally spaced around the circumference of the tyre and situated in the principal grooves of the tread.
- 3.4.2. For passenger car tyres designed for mounting on rims of nominal rim diameter code 12 or less, not less than three transverse rows of tread wear indicators is acceptable.
- 3.4.3. The height of each tread wear indicator shall be 1.6 mm, + 0.6 - 0.0 mm.

**3.4.4. Outer casing of each tyre shall have at least 4 treadwear indicators that can be observed [Z28] visually and are spaced equally around the circumference of the tyre, depth of treadwear indicators should be no less than 1.6 mm for mini-type and light duty truck.**

**3.4.5. Marks indicating the treadwear indicators location must be moulded on both shoulders of the tyre.**

- 3.5. Physical dimensions of passenger car tyres
- 3.5.1. The following paragraphs describe in detail the requirements for determining the physical dimensions of **passenger [AR29] pneumatic** ~~pneumatic~~ tyres according to this regulation. The characteristics to be determined are the overall width, and the outside diameter. If these characteristics are within the specified tolerances, the physical dimensions of the tyre are acceptable.
- 3.5.2. Definitions (see paragraph 2. of this regulation for detailed definitions of various terms)
- 3.5.2.1. The overall width of the tyre is defined as the average of four measurements of its width at the widest point, including any markings or protective ribs.
- 3.5.2.2. There is no defined theoretical overall width of standard tyres. It is a measured characteristic, not a calculated one.

**3.5.3. The section width shall be calculated by the following formula:**

$$S = S_1 + K(A - A_1),$$

Where:

S is the "section width" rounded to the nearest millimetre; [N30]

S<sub>1</sub> is the nominal section width (in mm) as shown on the side wall of the tyre in the designation of the tyre as prescribed;

A is the width (expressed in mm) of the measuring rim, as declared by the manufacturer;<sup>6</sup>

A<sub>1</sub> is the width (expressed in mm) of the theoretical rim.

<sup>6</sup> When the conventional number is given by codes, the value in millimetres is obtained by multiplying the code number by 25.4.

$A_1$  shall be taken to equal  $S_1$  multiplied by the factor  $x$ , as specified by the manufacturer, and  $K$  shall be taken to equal 0.4.[AR31]

**3.5.4. Outer diameter of tyre**

The outer diameter of the tyre shall be calculated by the following formula:

$$D = d + 2H$$

Where:

$D$  is the outer diameter in millimetres,

$d$  is the nominal rim diameter as defined in the Nominal rim diameter code table in Annex 3. |

[AR32]

$H$  is the nominal section height rounded to the nearest millimetre and is equal to

$$H = S_1 \times 0.01 Ra, \text{ where}$$

$S_1$  is the nominal section width in millimetres;

$Ra$  is the nominal aspect ratio;[AR33]

3.5.5. Physical dimensions measurement method

3.5.5.1. Mount the tyre on one of the approved rims mentioned in the appropriate Standards Manual.

3.5.5.2. Adjust the pressure to that specified in the table below:

	<i>Tyre application</i>	<i>Test pressure (kPa)</i>
<i>Physical dimensions test tyre inflation pressures</i>	Standard load, light load	180
	Extra load	220

3.5.5.3. Condition the tyre, mounted on its rim, at the ambient room temperature between 18 °C and 38 °C for not less than 24 hours.

3.5.5.4. Re-adjust the pressure to that specified in the table above.

3.5.5.5. Measure the overall width at four equally spaced points around the tyre, taking the thickness of protective ribs or bands into account. The reported value will be the average of the four measurements rounded to the nearest millimetre.

3.5.5.6. Determine the outer diameter by measuring the maximum circumference, dividing the result by 3.1416 (Pi) and rounding to the nearest millimetre.

3.5.5.7. Determine the height of the tread wear indicators by measuring the difference between the total depth of the tread pattern groove in the vicinity of the tread wear indicator and the depth to the top of the tread wear indicator. Repeat this measurement for at least one tread wear indicator in each row (minimum of 6 or 3, depending on the rim diameter; a row is the linear sequence of tread

wear indicators positioned radially across the tread from one side to the other). At least one tread wear indicator in each principal groove shall be measured (the principal grooves are the wide grooves positioned circumferentially around the tread). Record all of the individual values rounded to the nearest tenth of a millimetre.

### 3.5.6. Physical dimension requirements

#### 3.5.6.1. Overall width

3.5.6.1.1. The tyre overall width may exceed the section width defined in paragraph 3.5.3. above by 4 per cent whereby the limits shall be rounded to the nearest mm."[AR34]

3.5.6.1.2. In addition, if the tyre has rim protectors (see definition in paragraph 2.), the figure as increased by the above tolerance may be exceeded by 8 mm.

#### 3.5.6.2. Outer diameter

3.5.6.2.1. The outer diameter of a tyre shall not be outside the values  $D_{min}$  and  $D_{max}$  obtained from the following formulae:

$$D_{min} = d + 2 \cdot H_{min}$$

$$D_{max} = d + 2 \cdot H_{max}$$

where:

$$H_{min} = H \cdot a \quad \text{rounded to the nearest mm}$$

$$H_{max} = H \cdot b \quad \text{rounded to the nearest mm}[AR35]$$

Where the coefficients "a" and "b" are:

coefficient "a" = 0.97

Coefficient "b"	Radial, Run flat tyre
normal tyres	1.04
for special-use tyres	1.06

For snow tyres the outer diameter ( ~~$D_{max}$~~ ) shall not exceed the following value


$$D_{max,snow} = 1.01 \cdot D_{max} \quad \text{rounded to the nearest mm}$$

where  $D_{max}$  is the maximum outer diameter established in conformity with the above."[AR36]

3.5.7. Figure 1: Drawing of normal tyre showing rim diameter (d), outside diameter (D), section height (H) and section width (S) and the rim width (A).

Figure 1

**Drawing of a normal tyre showing various dimensions**

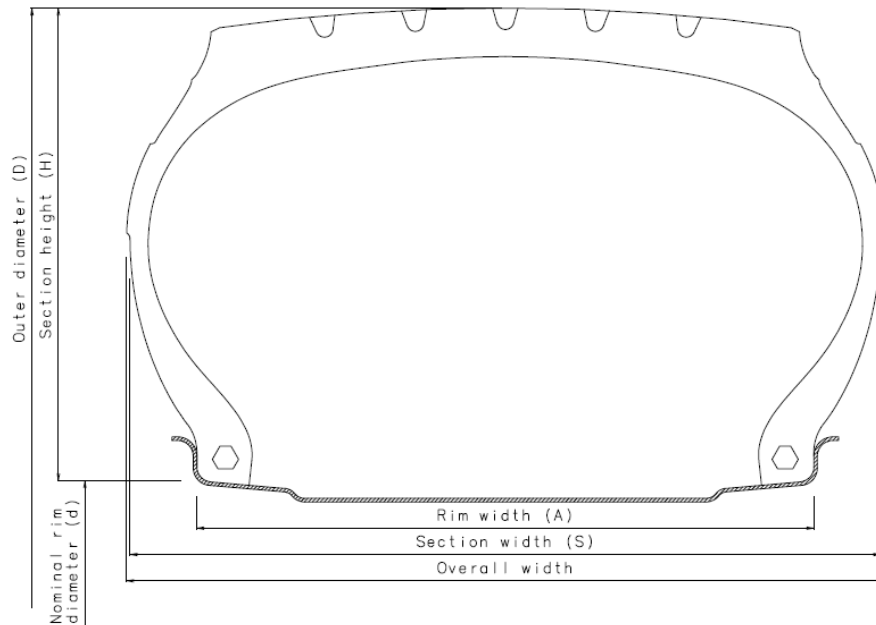

3.5.8. For other tyre sizes for which dimensions cannot be calculated, the dimensions including allowance for growth in service, shall comply with those given in standards publications of the organizations listed in Annex 7 and which were current either at the date of manufacture of the tyre or at any later date.

3.6. Strength test for passenger car tyres

3.6.1. Each tyre shall meet the requirements for minimum breaking energy specified in the table below.

<i>Nominal section width</i>	<i>Units</i>	<i>Standard load or light load tyres</i>	<i>Extra load tyres</i>
Below 160 mm	Joules	220	441
	Inch-pounds	1950	3900
160 mm or above	Joules	294	588
	Inch-pounds	2600	5200

3.6.2. Strength test procedure

3.6.2.1. Mount the tyre on a test rim and inflate it to the test inflation pressure specified in the table below:

<i>Strength test tyre inflation pressures</i>	<i>Tyre application</i>	<i>Test pressure (kPa)</i>
	Standard load, light load	180
	Extra load	220

3.6.2.2. Condition the wheel and tyre assembly for at least three hours at the temperature of the test room;

- 3.6.2.3. Re-adjust the tyre pressure to that specified in the previous table above (paragraph 3.6.2.1.);
- 3.6.2.4. Force a 19 mm (3/4 inch) diameter cylindrical steel plunger with a hemispherical end perpendicularly into the tread rib as near to the centerline as possible, avoiding penetration into the tread pattern groove, at the rate of 50 mm (2 inches) per minute;
- 3.6.2.5. Record the force and penetration at five test points equally spaced around the circumference of the tyre. If the tyre fails to break before the plunger is stopped by reaching the rim, record the force and penetration as the rim is reached and use these values in paragraph 3.6.2.6.. If the tyre fails to break before the plunger is stopped on reaching the rim, and the required minimum breaking energy is not achieved, then the tyre is deemed to have passed the test at that point
- 3.6.2.6. The breaking energy, W, in Joules, shall be calculated from:  

$$W = ((F \cdot P) / 2) \cdot 10^{-3}$$
 Where:  
 W = Energy in Joules  
 F = Force in Newtons applied to the plunger  
 P = Penetration of the plunger in mm  
 or  

$$W = (F \cdot P) / 2$$
 Where:  
 W = Energy in inch-pounds  
 F = Force in pounds and  
 P = Penetration in inches.
- 3.6.2.7. Determine the breaking energy value for the tyre by computing the average of the five values obtained;
- 3.6.2.8. In the case of tubeless tyres, an inner tube may be provided to ensure the retention of the inflation pressure throughout the test provided that such inner tube does not adversely affect the test.
- 3.7. Tubeless tyre bead unseating resistance test for passenger car tyres
- 3.7.1. Requirements
- 3.7.1.1. Each tubeless tyre shall meet the requirements for minimum force, in Newtons, for bead unseating resistance, specified in one of the tables below.
- 3.7.1.2. For tubeless radial ply tyres the applied force required to unseat the tyre bead at the point of contact, in relation to the nominal section width of the tyre, shall not be less than:

<i>Nominal section width (mm)</i>	<i>Minimum force (N)</i>
Less than 160	6 670

<i>Nominal section width (mm)</i>	<i>Minimum force (N)</i>
From 160 to 204	8 890
Equal to or greater than 205	11 120

<i>Nominal section width (code)</i>	<i>Minimum force (N)</i>
Less than 6.00	6 670
From 6.00 to 7.99	8 890
Equal to or greater than 8.00	11 120

### 3.7.2. Preparation of tyre

3.7.2.1. Wash the tyre and dry it at the beads. Mount it without lubricant or adhesive on a clean, painted test rim. The rim contour shall be one of those specified for the fitment of the test tyre.

3.7.2.2. Inflate the tyre to the pressure specified in the table shown below:

<i>Bead unseating resistance test pressures</i>	<i>Tyre application</i>	<i>Test pressure kPa</i>
	Standard load, light load	180
	Extra load	220

### 3.7.3. Test procedure

3.7.3.1. Mount the assembly on a fixture as shown in Figure 2, below, and force the bead unseating block shown in Figure 3 or Figure 4 against the tyre sidewall as required by the geometry of the fixture.

3.7.3.2. Position the bead unseating block against the tyre sidewall at a horizontal distance "A" as shown in Figure 2 and Table 1, below.

3.7.3.3. Apply a force through the block to the tyre outer sidewall at a rate of 50 mm/min  $\pm$  2.5 mm/min.

3.7.3.4. Increase the force until the bead unseats or until the prescribed value shown in paragraph 3.7.1.2. is reached.

3.7.3.5. Repeat the test at least four times at places approximately equally spaced around the tyre circumference.

Figure 2



## Bead unseating fixture

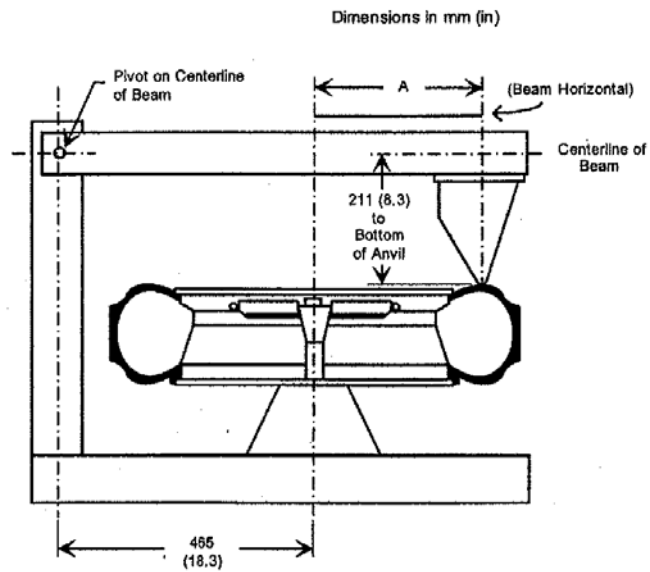


Table 1  
List of "A" dimensions

<i>Table of A dimension for different rim codes</i>		
<i>Rim code</i>	<i>mm</i>	<i>Inches</i>
20	345	13.50
19	330	13.00
18	318	12.50
17	305	12.00
16	292	11.50
15	279	11.00
14	267	10.50
13	254	10.00
12	241	9.50
11	229	9.00
10	216	8.50
320	216	8.50
340	229	9.00
345	235	9.25
365	248	9.75
370	254	10.00
390	279	11.00

Table of A dimension for different rim codes		
Rim code	mm	Inches
415	292	11.50

Figure 3  
Bead unseating block


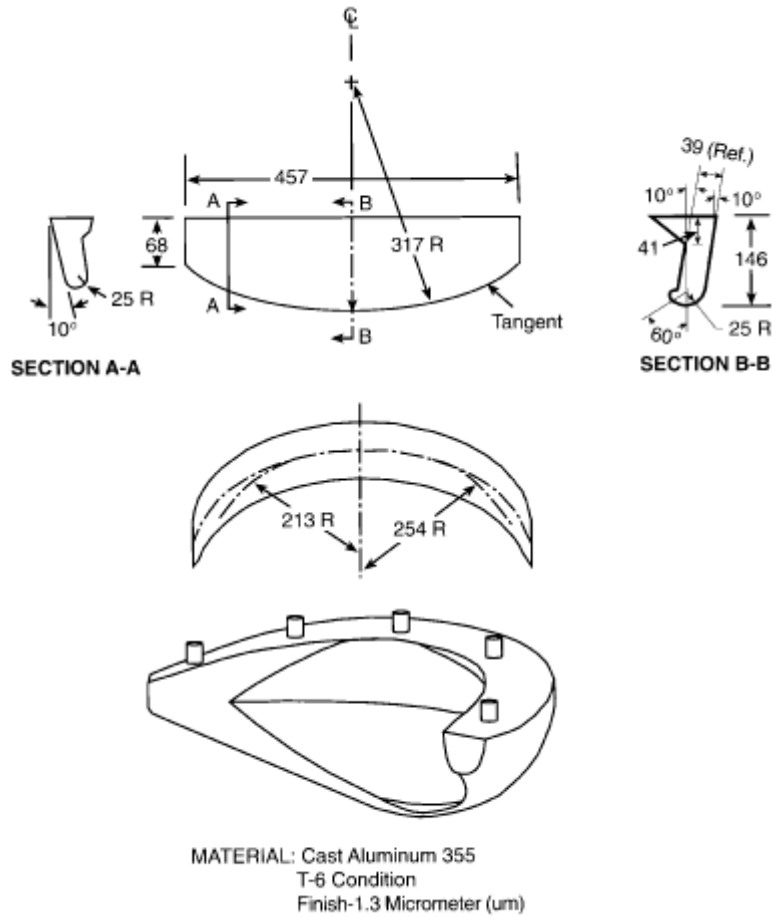


Figure 4  
Bead unseating block

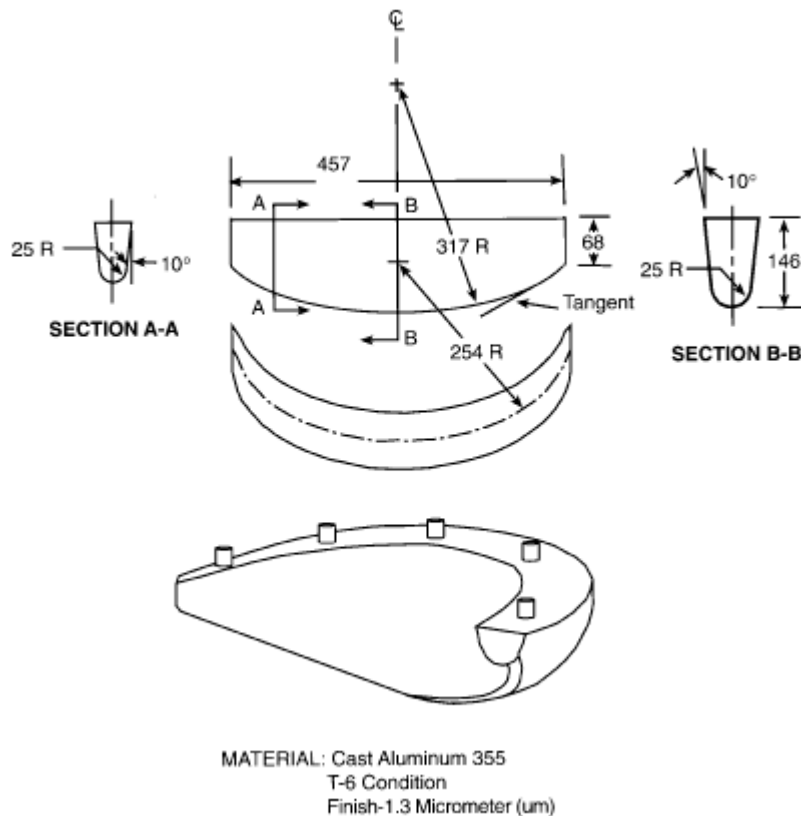

### 3.8. Tyre rolling sound emission test

#### 3.8.1. Requirements

For tyres which are included within the scope of this regulation, except Professional off-road tyres, tyres fitted with additional devices to improve traction properties (e.g. studded tyres), tyres with a speed rating less than 80 km/h (speed symbol F) and those having a nominal rim diameter code  $\leq 10$  (or  $\leq 254$  mm) or  $\geq 25$  (or  $\geq 635$  mm), the rolling sound emission value shall not exceed the values given below for tyres of Classes C1, C2 and C3, with reference to the categories of use and, where relevant, the nominal section widths, given in the definitions section in paragraph 2. of this regulation.

#### Class C1 tyres

Nominal section width	Limit dB(A)
185 and lower	70
Over 185 up to 245	71
Over 245 up to 275	72
Over 275	74
The above limits shall be increased by 1 dB(A) for snow tyres for use in severe snow conditions, extra load tyres or any combination of these classifications.	

**Class C2 tyres**

<i>Category of use</i>		<i>Limit dB(A)</i>	
		<i>Other</i>	<i>Traction tyres</i>
Normal tyre		72	73
Snow tyre		72	73
	Snow tyre for use in severe snow conditions	73	75
Special use tyre		74	75

**Class C3 tyres**

<i>Category of use</i>		<i>Limit dB(A)</i>	
		<i>Other</i>	<i>Traction tyres</i>
Normal tyre		73	75
Snow tyre		73	75
	Snow tyre for use in severe snow conditions	74	76
Special use tyre		75	77

## 3.8.2. Coast-by test method for measuring tyre rolling sound emission

The presented method contains specifications on measuring instruments, measurement conditions and the measurement method, in order to obtain the sound level of a set of tyres mounted on a test vehicle rolling on a specified road surface. The maximum sound pressure level is to be recorded, when the test vehicle is coasting, by remote-field microphones; the final result for a reference speed is obtained from a linear regression analysis. Such test results cannot be related to tyre rolling sound measured during acceleration under power or deceleration under braking.

## 3.8.3. Measuring instruments

## 3.8.3.1. Acoustic measurements

The sound level meter or the equivalent measuring system, including the windscreen recommended by the manufacturer shall meet or exceed the requirements of Type 1 instruments in accordance with standard IEC 60651:1979/A1:1993, second edition.

The measurements shall be made using the frequency weighting A, and the time weighting F.

When using a system that includes a periodic monitoring of the A-weighted sound level, a reading should be made at a time interval not greater than 30 ms.

#### 3.8.3.1.1. Calibration

At the beginning and at the end of every measurement session, the entire measurement system shall be checked by means of a sound calibrator that fulfils the requirements for sound calibrators of at least precision Class 1 according to standard IEC 60942:1988.

Without any further adjustment the difference between the readings of two consecutive checks shall be less than or equal to 0.5 dB(A). If this value is exceeded, the results of the measurements obtained after the previous satisfactory check shall be discarded.

#### 3.8.3.1.2. Compliance with requirements

The compliance of the sound calibration device with the requirements of standard IEC 60942:1988 shall be verified once a year and the compliance of the instrumentation system with the requirements of standard IEC 60651:1979/A1:1993, second edition shall be verified at least every two years, by a laboratory which is authorized to perform calibrations traceable to the appropriate standards.

#### 3.8.3.1.3. Positioning of the microphone

The microphone (or microphones) shall be located at a distance of  $7.5 \pm 0.05$  m from track reference line CC' (Figure 5) and  $1.2 \pm 0.02$  m above the ground. Its axis of maximum sensitivity shall be horizontal and perpendicular to the path of the vehicle (line CC').

#### 3.8.3.2. Speed measurements

The vehicle speed shall be measured with instruments with accuracy of  $\pm 1$  km/h or better when the front end of the vehicle has reached line PP' (Figure 5).

#### 3.8.3.3. Temperature measurements

Measurements of air as well as test surface temperature are mandatory.

The temperature measuring devices shall be accurate within  $\pm 1^\circ\text{C}$ .

##### 3.8.3.3.1. Air temperature

The temperature sensor is to be positioned in an unobstructed location close to the microphone in such a way that it is exposed to the airflow and protected from direct solar radiation. The latter may be achieved by any shading screen or similar device. The sensor should be positioned at a height of  $1.2 \pm 0.1$  m above the test surface level, to minimize the influence of the test surface thermal radiation at low airflows.

##### 3.8.3.3.2. Test surface temperature

The temperature sensor is to be positioned in a location where the temperature measured is representative of the temperature in the wheel tracks, without interfering with the sound measurement.

If an instrument with a contact temperature sensor is used, heat-conductive paste shall be applied between the surface and the sensor to ensure adequate thermal contact.

If a radiation thermometer (pyrometer) is used, the height should be chosen to ensure that a measuring spot with a diameter of  $\geq 0.1$  m is covered.

3.8.3.4. Wind measurement

The device shall be capable of measuring the wind speed with a tolerance of  $\pm 1$  m/s. The wind shall be measured at microphone height. The wind direction with reference to the driving direction shall be recorded.

3.8.4. Conditions of measurement

3.8.4.1. Test site

The test site shall consist of a central section surrounded by a substantially flat test area. The measuring section shall be level; the test surface shall be dry and clean for all measurements. The test surface shall not be artificially cooled during or prior the testing.

The test track shall be such that the conditions of a free sound field between the sound source and the microphone are attained to within 1 dB(A). These conditions shall be deemed to be met if there is no large sound reflecting objects such as fences, rocks, bridges or building within 50 m of the centre of the measuring section. The surface of the test track and the dimensions of the test site shall be in accordance with ISO 10844:2014.

A central part of at least 10 m radius shall be free of powdery snow, tall grass, loose soil, cinders or the like. There shall be no obstacle, which could affect the sound field within the vicinity of the microphone and no persons shall stand between the microphone and the sound source. The operator carrying out the measurements and any observers attending the measurements shall position themselves so as not to affect the readings of the measuring instruments.

3.8.4.2. Meteorological conditions

Measurements shall not be made under poor atmospheric conditions. It shall be ensured that the results are not affected by gusts of wind. Testing shall not be performed if the wind speed at the microphone height exceeds 5 m/s.

Measurements shall not be made if the air temperature is below 5 °C or above 40 °C or the test surface temperature is below 5 °C or above 50 °C.

3.8.4.3. Ambient noise

3.8.4.3.1. The background sound level (including any wind noise) shall be at least 10 dB(A) less than the measured tyre rolling sound emission. A suitable windscreen may be fitted to the microphone provided that account is taken of its effect on the sensitivity and directional characteristics of the microphone.

3.8.4.3.2. Any measurement affected by a sound peak which appears to be unrelated to the characteristics of the general sound level of tyres, shall be ignored.

3.8.4.4. Test vehicle requirements

3.8.4.4.1. General

The test vehicle shall be a motor vehicle and be fitted with four single tyres on just two axles.

3.8.4.4.2. Vehicle load

The vehicle shall be loaded such as to comply with the test tyre loads as specified in paragraph 3.8.4.5.2. below.

3.8.4.4.3. Wheelbase

The wheelbase between the two axles fitted with the test tyres shall for Class C1 be less than 3.50 m and for Class C2 and Class C3 tyres be less than 5 m.

3.8.4.4.4. Measures to minimize vehicle influence on sound level measurements

To ensure that tyre rolling sound is not significantly affected by the test vehicle design the following requirements and recommendations are given.

3.8.4.4.4.1. Requirements:

- (a) Spray suppression flaps or other extra device to suppress spray shall not be fitted;
- (b) Addition or retention of elements in the immediate vicinity of the rims and tyres, which may screen the emitted sound, is not permitted;
- (c) Wheel alignment (toe in, camber and caster) shall be in full accordance with the vehicle manufacturer's recommendations;
- (d) Additional sound absorbing material may not be mounted in the wheel housings or under the underbody;
- (e) Suspension shall be in such a condition that it does not result in an abnormal reduction in ground clearance when the vehicle is loaded in accordance with the testing requirement. If available, body level regulation systems shall be adjusted to give a ground clearance during testing which is normal for unladen condition.

3.8.4.4.4.2. Recommendations to avoid parasitic noise:

- (a) Removal or modification on the vehicle that may contribute to the background noise of the vehicle is recommended. Any removals or modifications shall be recorded in the test report;
- (b) During testing it should be ascertained that brakes are not poorly released, causing brake noise;
- (c) It should be ascertained that electric cooling fans are not operating;
- (d) Windows and sliding roof of the vehicle shall be closed during testing.

3.8.4.5. Tyres

3.8.4.5.1. General

Four identical tyres shall be fitted on the test vehicle. In the case of tyres with a load index in excess of 121 and without any dual fitting indication, two of these tyres of the same type and range shall be fitted to the rear axle of the test vehicle; the front axle shall be fitted with tyres of size suitable for the axle load and planed down to the minimum depth in order to minimize the influence of tyre/road contact noise while maintaining a sufficient level of safety. Winter tyres that in certain Contracting Parties may be equipped with studs intended to enhance friction shall be tested without this equipment. Tyres with special fitting requirements shall be tested in accordance with these requirements (e.g. rotation direction). The tyres shall have full tread depth before being run-in. ~~(also referred to as break-in or conditioned).~~

Tyres are to be tested on rims permitted by the tyre manufacturer.

3.8.4.5.2. Tyre loads

The test load  $Q_t$  for each tyre on the test vehicle shall be 50 to 90 per cent of the reference load  $Q_r$ , but the average test load  $Q_{t,avr}$  of all tyres shall be  $75 \pm 5$  per cent of the reference load  $Q_r$ .

For all tyres the reference load  $Q_r$  corresponds to the maximum mass associated with the load index of the tyre. In the case where the load index is constituted by two numbers divided by a slash (/), reference shall be made to the first number.

3.8.4.5.3. Tyre inflation pressure

Each tyre fitted on the test vehicle shall have a test pressure  $P_t$  not higher than the reference pressure  $P_r$  and within the interval:

$$P_r \cdot \left( \frac{Q_t}{Q_r} \right)^{1.25} \leq P_t \leq 1.1 P_r \cdot \left( \frac{Q_t}{Q_r} \right)^{1.25}$$

~~For Class C2 and Class C3 the reference pressure  $P_r$  is the pressure corresponding to the pressure index marked on the sidewall.~~

**For Class C2 and Class C3 the reference pressure  $P_r$  is the inflation pressure corresponding to the pressure in kPa or to the pressure index marked on the sidewall. [AR37]**

For Class C1 the reference pressure is  $P_r = 250$  kPa for "standard" or "light load" tyres and 290 kPa for "extra load" tyres; the minimum test pressure shall be  $P_t = 150$  kPa.

3.8.4.5.4. Preparations prior to testing

The tyres shall be "run-in" prior to testing to remove compound nodules or other tyre pattern characteristics resulting from the moulding process. This will normally require the equivalent of about 100 km of normal use on the road.

The tyres fitted to the test vehicle shall rotate in the same direction as when they were run-in.

Prior to testing tyres shall be warmed up by running under test conditions.

3.8.5. Method of testing

3.8.5.1. General conditions

For all measurements the vehicle shall be driven in a straight line over the measuring section (AA' to BB') in such a way that the median longitudinal plane of the vehicle is as close as possible to the line CC'.

When the front end of the test vehicle has reached the line AA', the vehicle's driver shall have put the gear selector on neutral position and switched off the engine. If abnormal noise (e.g. ventilator, self-ignition) is emitted by the test vehicle during the measurement, the test shall be disregarded.

3.8.5.2. Nature and number of measurements

The maximum sound level expressed in A-weighted decibels (dB(A)) shall be measured to the first decimal place as the vehicle is coasting between lines AA' and BB' (Figure 5 - front end of the vehicle on line AA', rear end of the vehicle on line BB'). This value will constitute the result of the measurement.



At least four measurements shall be made on each side of the test vehicle at test speeds lower than the reference speed specified in paragraph 3.8.6.1. and at least four measurements at test speeds higher than the reference speed. The speeds shall be approximately equally spaced over the speed range specified in paragraph 3.8.5.3.

3.8.5.3. Test speed range

The test vehicle speeds shall be within the range:

- (a) From 70 to 90 km/h for Class C1 and Class C2 tyres;
- (b) From 60 to 80 km/h for Class C3 tyres.

3.8.6. Interpretation of results

The measurement shall be invalid if an abnormal discrepancy between the values is recorded (see paragraph 3.8.4.3.2. above).

3.8.6.1. Determination of test result

The reference speed  $V_{ref}$  used to determine the final result shall be:

- (a) 80 km/h for Class C1 and Class C2 tyres;
- (b) 70 km/h for Class C3 tyres.

3.8.6.2. Regression analysis of rolling sound measurements

The tyre-road rolling sound level  $L_R$  in dB(A) is determined by a regression analysis according to:

$$L_R = \bar{L} - a \cdot \bar{v}$$

Where:

$\bar{L}$  is the mean value of the rolling sound levels  $L_i$ , measured in dB(A):

$$\bar{L} = \frac{1}{n} \sum_{i=1}^n L_i$$

$n$  is the measurement number ( $n \geq 16$ ),

$\bar{v}$  is the mean value of logarithms of speeds  $v_i$ :

$$\bar{v} = \frac{1}{n} \sum_{i=1}^n v_i \quad \text{with} \quad v_i = \lg(v_i / v_{ref})$$

"a" is the slope of the regression line in dB(A):

$$a = \frac{\sum_{i=1}^n (v_i - \bar{v})(L_i - \bar{L})}{\sum_{i=1}^n (v_i - \bar{v})^2}$$

3.8.6.3. Temperature correction

For Class C1 and Class C2 tyres, the final result shall be normalized to a test surface reference temperature  $\vartheta_{ref}$  by applying a temperature correction, according to the following:

$$LR(\vartheta_{ref}) = LR(\vartheta) + K(\vartheta_{ref} - \vartheta)$$

Where:

$\vartheta$  = the measured test surface temperature

$\vartheta_{ref} = 20 \text{ }^\circ\text{C}$ .

For Class C1 tyres, the coefficient K is:

-0.03 dB(A)/ $^\circ\text{C}$  when  $\vartheta > \vartheta_{ref}$  and

-0.06 dB(A)/ $^\circ\text{C}$  when  $\vartheta < \vartheta_{ref}$ .


For Class C2 tyres, the coefficient K is -0.02 dB(A)/ $^\circ\text{C}$ .

If the measured test surface temperature does not change more than 5  $^\circ\text{C}$  within all measurements necessary for the determination of the sound level of one set of tyres, the temperature correction may be made only on the final reported tyre rolling sound level as indicated above, utilizing the arithmetic mean value of the measured temperatures. Otherwise each measured sound level  $L_i$  shall be corrected, utilizing the temperature at the time of the sound recording.

3.8.6.4. In order to take account of any measuring instrument inaccuracies, the results according to paragraph 3.8.6.3. shall be reduced by 1 dB(A).

3.8.6.5. The final result, the temperature corrected tyre rolling sound level  $L_R(\vartheta_{ref})$  in dB(A), shall be rounded down to the nearest lower whole value.

Figure 5  
Microphone positions for the measurement

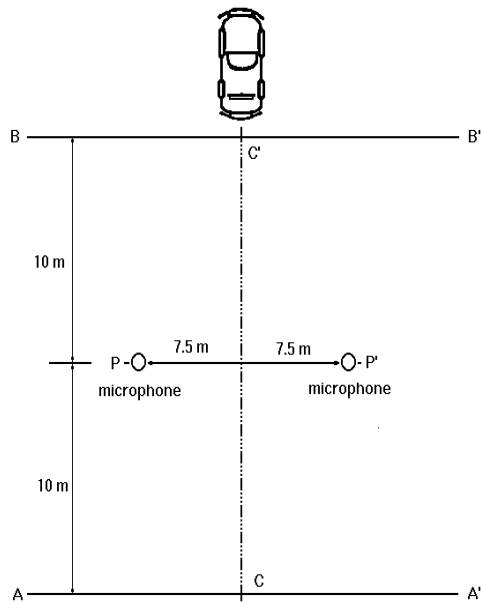

3.9. Endurance test for passenger car tyres

3.9.1. Requirements

- 3.9.1.1. The following requirements shall be met by all passenger car tyres when tested in accordance with the procedures described in paragraphs 3.9.2. and 3.9.3. below.
- 3.9.1.2. There shall be no visible evidence of tread, sidewall, ply, cord, inner liner, belt or bead separation, chunking, open splices, cracking or broken cords.
- 3.9.1.3. The tyre pressure, when measured at any time between 15 minutes and 25 minutes after the end of the test, shall not be less than 95 per cent of the initial pressure specified in paragraph 3.9.2.

3.9.2. Preparation of tyre

Mount the tyre on a test rim and inflate it to the pressure specified in the table below.

<i>Endurance test tyre inflation pressures</i>	<i>Tyre application</i>	<i>Test pressure (kPa)</i>
	Standard load, light load	180
	Extra load	220

- 3.9.2.1. Condition the assembly at  $35 \pm 3$  °C for not less than 3 hours.
- 3.9.2.2. Readjust the pressure to the value specified in the table in paragraph 3.9.2. immediately before testing.
- 3.9.3. Test procedure
- 3.9.3.1. Mount the assembly on a test axle and apply a load as given in paragraph 3.9.3.3. below to load it against the outer face of a smooth wheel having a diameter of  $1.7 \text{ m} \pm 1$  per cent.
- 3.9.3.2. During the test the ambient temperature, at a distance of not less than 150 mm and not more than 1 m from the tyre, is maintained at  $35 \pm 3$  °C.
- 3.9.3.3. Conduct the test, without interruptions, at not less than 120 km/h (110 km/h for snow tyres for use in severe snow conditions and marked with the three peak mountain snowflake) test speed with loads and test periods not less than those shown in the table below:

Passenger car tyres:

<i>Test period</i>	<i>Duration</i>	<i>Load as a percentage of tyre maximum load capacity</i>
1	4 h	85 %
2	6 h	90 %
3	24 h	100 %

- 3.9.3.4. Throughout the test the inflation pressure shall not be corrected and the test loads shall be kept constant at the value corresponding to each test period.
- 3.9.3.5. Allow the tyre to cool for between 15 and 25 minutes, then measure its inflation pressure. Inspect the tyre externally on the test rim for the conditions specified in paragraph 3.9.1. above.
- 3.10. Low inflation pressure performance test for passenger car tyres

3.10.1. Requirements

The following requirements shall be met by tyres when tested in accordance with the procedure given in paragraph 3.10.3. below.

3.10.1.1. There shall be no visible evidence of tread, sidewall, ply, cord, inner liner, belt or bead separation, chunking, open splices, cracking or broken cords.

3.10.1.2. The tyre pressure, when measured at any time between 15 minutes and 25 minutes after the end of the test, shall not be less than 95 per cent of the initial pressure specified in paragraph 3.10.2. below.

3.10.2. Preparation of tyre

This test is conducted following completion of the tyre endurance test using the same tyre and rim assembly tested in accordance with paragraph 3.9. above, with the tyre deflated to the following pressures show in the table below:

Low inflation pressure performance test

Inflation pressure chart for passenger car tyres

<i>Low inflation pressure performance pressures</i>	<i>Tyre application</i>	<i>Test pressure kPa</i>
Passenger car tyres	Standard load, light load	140
	Extra load	160

3.10.2.1. After the tyre is deflated to the appropriate test pressure in paragraph 3.10.2. at the completion of the endurance test, condition the assembly at  $35 \pm 3$  °C for not less than 2 hours.

3.10.2.2. Before or after mounting the assembly on a test axle, readjust the tyre pressure to that specified in the table in paragraph 3.10.2.

3.10.3. Test procedure

3.10.3.1. The test is conducted for ninety minutes at the end of the test specified in paragraph 3.9., continuous and uninterrupted, at a speed of 120 km/h (110 km/h for snow tyres for use in severe snow conditions and marked with the three peak mountain snowflake).

3.10.3.2. Press the assembly against the outer face of a test drum with a diameter of  $1.7 \text{ m} \pm 1$  per cent.

3.10.3.3. Apply to the test axle a load equal to 100 per cent of the tyre's maximum load rating.

3.10.3.4. Throughout the test, the inflation pressure is not corrected and the test load is maintained at the initial level.

3.10.3.5. During the test, the ambient temperature, at a distance of not less than 150 mm and not more than 1 m from the tyre, is maintained at  $35 \pm 3$  °C.

3.10.3.6. Allow the tyre to cool for between 15 and 25 minutes. Measure its inflation pressure. Then deflate the tyre, remove it from the test rim, and inspect it for the conditions specified in paragraph 3.10.1.1. above.

3.11. High speed performance test for passenger car tyres

3.11.1. Requirements

When the tyre is tested in accordance with paragraph 3.11.3. or 3.11.5.;

- 3.11.1.1. There shall be no visible evidence of tread, sidewall, ply, cord, inner liner, belt or bead separation, chunking, open splices, cracking or broken cords. For tyres tested at a speed of 300 km/h (speed symbol "Y") or above, superficial blistering in the tyre tread due to localized heat build-up in the test drum is acceptable.
- 3.11.1.2. The tyre pressure, when measured at any time between 15 minutes and 25 minutes after the end of the test, shall not be less than 95 per cent of the initial pressure.
- 3.11.1.3. The outer diameter of the tyre, measured two hours after the load/speed performance test, shall not differ by more than  $\pm 3.5$  per cent from the outer diameter as measured before the test.
- 3.11.1.4. For tyres identified by means of letter code "ZR" within the size designation and suitable for speeds over 300 km/h, the above high speed test is carried out on one tyre at the load and speed conditions marked on the tyre. Another load/speed test shall be carried out on a second sample of the same tyre type at the load and speed conditions specified as maximum by the tyre manufacturer. The second test may be carried out on the same tyre sample.
- 3.11.2. Preparation of the tyres with speed symbols "F" to "S" as specified in Annex 1 to this regulation.
- 3.11.2.1. Mount the tyre on a test rim and inflate it to the appropriate pressure specified in the table below:

Inflation pressure and test load:

<i>Speed symbol</i>	<i>Inflation pressure, kPa</i>		<i>Test load</i>
	<i>Standard load tyres, light load tyres</i>	<i>Extra load tyres</i>	
F, G, J, K, L, M, N, P, Q, R, S	220	260	85 % of the load corresponding to the load index

- 3.11.2.2. Condition the assembly at  $35 \pm 3$  °C for not less than three hours.
- 3.11.2.3. Before or after mounting the assembly on a test axle, readjust the tyre pressure to that specified in the table above in paragraph 3.11.2.1.
- 3.11.3. Test procedure for tyres with speed symbols "F", "G", "J", "K", "L", "M", "N", "P", "Q", "R" or "S" as specified in Annex 1
- 3.11.3.1. Press the assembly against the outer face of a test drum with a diameter of  $1.7 \text{ m} \pm 1$  per cent.
- 3.11.3.2. Apply to the test axle a load equal to 85 per cent of the tyre's maximum load carrying capacity.
- 3.11.3.3. Break-in the tyre by running it for 2 hours at 80 km/h.
- 3.11.3.4. Allow the tyre to cool to 38 °C and readjust inflation pressure to the applicable pressure in the table in paragraph 3.11.2.1. above immediately before the test.

- 3.11.3.5. Throughout the test, the inflation pressure is not corrected and the test load is maintained at the value applied in paragraph 3.11.2.1.
- 3.11.3.6. During the test, the ambient temperature, measured at a distance of not less than 150 mm and not more than 1 m from the tyre, shall be maintained at  $35 \pm 3$  °C.
- 3.11.3.7. The test is conducted, continuously and uninterrupted, for ninety minutes through three thirty-minute consecutive test stages at the following speeds: 140, 150, and 160 km/h.
- 3.11.3.8. Allow the tyre to cool for between 15 minutes and 25 minutes. Measure its inflation pressure. Then, deflate the tyre, remove it from the test rim, and inspect it for the conditions specified in paragraph 3.11.1.1. above.
- 3.11.4. Preparation of tyres with speed symbols "T" to "Y" as specified in Annex 1 to this Regulation.
  - 3.11.4.1. Mount a new tyre on the test rim specified by the manufacturer as the "measuring rim and test rim".
  - 3.11.4.2. Inflate it to the appropriate pressure as given (in kPa) in the table below:

**Inflation pressure and test load**

<i>Speed symbol</i>	<i>Inflation pressure, kPa</i>		<i>Test load</i>
	<i>Standard load tyres, light load tyres</i>	<i>Extra load tyres</i>	
T, U, H	280	320	80 % of the load corresponding to the load index
V	300	340	73 % of the load corresponding to the load index
W	320	360	68 % of the load corresponding to the load index
Y	320	360	68 % of the load corresponding to the load index

- 3.11.4.3. Condition the tyre and wheel assembly at between 20 °C and 30 °C for not less than three hours.
- 3.11.4.4. Re-adjust the tyre pressure to that specified in paragraph 3.11.4.2. above.
- 3.11.5. Test procedure for tyres with speed symbols "T" to "Y" as specified in Annex 1 to this regulation.
  - 3.11.5.1. Press the assembly against the outer face of 1.7 m  $\pm$  1 per cent or 2.0 m  $\pm$  1 per cent test drum.
  - 3.11.5.2. Depending upon the speed symbol applicable to the tyre, apply a load to the test axle equal to that shown in the table in paragraph 3.11.4.2. above.
  - 3.11.5.3. Throughout the test the tyre pressure shall not be corrected and the test load shall be kept constant.

- 3.11.5.4. During the test the temperature in the test-room shall be maintained at between 20 °C and 30 °C or at a higher temperature if the manufacturer desires to increase test severity.
- 3.11.5.5. Carry the test through, without interruptions as follows, in relation to the tyre's speed symbol.
- 3.11.5.6. The initial test speed (ITS) is equal to the tyre's speed symbol:
- (a) Less 40 km/h on a 1.70 m ± 1 per cent drum, or
  - (b) Less 30 km/h on a 2.0 m ± 1 per cent drum.
- 3.11.6. For tyres of speed symbols "T" to "W" as specified in Annex 1;
- 3.11.6.1. Accelerate the equipment at a constant rate such that the initial test speed (ITS) is reached at the end of 10 minutes from start-up.
- (a) Then, at the ITS for 10 minutes;
  - (b) Then, at the ITS plus 10 km/h for 10 minutes;
  - (c) Then, at the ITS plus 20 km/h for 10 minutes;
  - (d) Then, at the ITS plus 30 km/h for 20 minutes.
- 3.11.6.2. For tyres of speed symbol "Y": Accelerate the equipment at a constant rate such that the Initial Test Speed (ITS) is reached at the end of 10 minutes from start-up.
- (a) Then, at the ITS for 20 minutes;
  - (b) Then, at the ITS plus 10 km/h for 10 minutes.
  - (c) Then, at the ITS plus 20 km/h for 10 minutes;
  - (d) Then, at the ITS plus 30 km/h for 10 minutes.
- 3.11.7. For tyres with "ZR" in the size designation intended for use at speeds greater than 300 km/h;
- 3.11.7.1. Test the tyre at the load and inflation for a speed symbol "Y" tyre according to the procedures specified above in paragraphs 3.11.4.2. and 3.11.6.2. above.
- 3.11.7.2. Test a further sample of the same type according to:
- Inflate the tyre to 320 kPa for standard load or light load tyres and 360 kPa for extra load tyres. Apply a load to the test axle that is equal to 80 per cent of the load capacity specified by the tyre manufacturer. Accelerate the equipment at a constant rate such that the rated speed of the tyre is reached at the end of 10 minutes from the start-up. Then test at the rated speed for 5 minutes.
- 3.12. Test for adhesion performance on wet surfaces
- 3.12.1. Requirements
- The following requirements do not apply to professional off-road tyres, tyres fitted with additional devices to improve traction properties (e.g. studded tyres), tyres with a speed rating less than 80 km/h (speed symbol F) and those having a nominal rim diameter code ≤ 10 (or ≤ 254 mm) or ≥ 25 (or ≥ 635 mm).
- For Class C1 tyres, tested in accordance with either procedure given in paragraph 3.12.2., the tyre shall meet the following requirements:

<i>Category of use</i>		<i>Wet grip index (G)</i>
Normal tyre		$\geq 1.1$
Snow tyre		$\geq 1.1$
	"Snow tyre for use in severe snow conditions" and with a speed symbol ("R" and above, including "H") indicating a maximum permissible speed greater than 160 km/h	$\geq 1.0$
	"Snow tyre for use in severe snow conditions" and with a speed symbol ("Q" or below excluding "H") indicating a maximum permissible speed not greater than 160 km/h	$\geq 0.9$
Special use tyre		Not defined

For Class C2 tyres, tested in accordance with either procedure given in paragraph 3.12.3., the tyre shall meet the following requirements:

<i>Category of use</i>		<i>Wet grip index (G)</i>	
		<i>Other</i>	<i>Traction tyres</i>
Normal tyre		$\geq 0.95$	$\geq 0.85$
Snow tyre		$\geq 0.95$	$\geq 0.85$
	Snow tyre for use in severe snow conditions	$\geq 0.85$	$\geq 0.85$
Special use tyre		$\geq 0.85$	$\geq 0.85$

For Class C3 tyres, tested in accordance with either procedure given in paragraph 3.12.3., the tyre shall meet the following requirements:

<i>Category of use</i>		<i>Wet grip index (G)</i>	
		<i>Other</i>	<i>Traction tyres</i>
Normal tyre		$\geq 0.80$	$\geq 0.65$
Snow tyre		$\geq 0.65$	$\geq 0.65$
	Snow tyre for use in severe snow conditions	$\geq 0.65$	$\geq 0.65$
Special use tyre		$\geq 0.65$	$\geq 0.65$

### 3.12.2. C1 category tyres

#### 3.12.2.1. Reference standards

The following documents listed apply.

- 3.12.2.1.1. ASTM E 303-93 (Reapproved 2008), Standard Test Method for Measuring Surface Frictional Properties Using the British Pendulum Tester.
- 3.12.2.1.2. ASTM E 501-08, Standard Specification for Standard Rib Tire for Pavement Skid-Resistance Tests.
- 3.12.2.1.3. ASTM E 965-96 (Reapproved 2006), Standard Test Method for Measuring Pavement Macrotexture Depth Using a Volumetric Technique.



## 3.12.2.2. General test conditions

## 3.12.2.2.1. Track characteristics

The test track shall have the following characteristics:

- 3.12.2.2.1.1. The surface shall have a dense asphalt surface with a uniform gradient of not more than 2 per cent and shall not deviate more than 6 mm when tested with a 3 m straight edge.
- 3.12.2.2.1.2. The surface shall have a pavement of uniform age, composition, and wear. The test surface shall be free of loose material and foreign deposits.
- 3.12.2.2.1.3. The maximum chipping size shall be 10 mm (tolerances permitted from 8 mm to 13 mm).
- 3.12.2.2.1.4. The texture depth as measured by a sand patch shall be  $0.7 \pm 0.3$  mm. It shall be measured in accordance with ASTM E 965-96 (Reapproved 2006).
- 3.12.2.2.1.5. The wetted frictional properties of the surface shall be measured with either method (a) or (b) in section 3.12.2.2.2.
- 3.12.2.2.2. Methods to measure the wetted frictional properties of the surface
- 3.12.2.2.2.1. British Pendulum Number (BPN) method (a)

The British Pendulum Number method shall be as defined in ASTM E 303-93 (Reapproved in 2008).

Pad rubber component formulation and physical properties shall be as specified in ASTM E 501-08.

The averaged British Pendulum Number (BPN) shall be between 42 and 60 BPN after temperature correction as follows.

BPN shall be corrected by the wetted road surface temperature. Unless temperature correction recommendations are indicated by the British pendulum manufacturer, the following formula is used:

$BPN = BPN(\text{measured value}) + \text{temperature correction}$

$\text{temperature correction} = -0.0018 t^2 + 0.34 t - 6.1$

where  $t$  is the wetted road surface temperature in degrees Celsius.

Effects of slider pad wear: the pad shall be removed for maximum wear when the wear on the striking edge of the slider reaches 3.2 mm in the plane of the slider or 1.6 mm vertical to it in accordance with section 5.2.2. and Figure 3 of ASTM E 303-93 (Reapproved 2008).

For the purpose of checking track surface BPN consistency for the measurement of wet grip on an instrumented passenger car: the BPN values of the test track should not vary over the entire stopping distance so as to decrease the dispersion of test results. The wetted frictional properties of the surface shall be measured five times at each point of the BPN measurement every 10 meters and the coefficient of variation of the averaged BPN shall not exceed 10 per cent.

## 3.12.2.2.2.2. ASTM E 1136 Standard Reference Test Tyre method (b)

This method uses the reference tyre that has the characteristics indicated in the ASTM E 1136-93 (Reapproved 2003) and referred to as SRTT14.

The average peak braking force coefficient ( $\mu_{\text{peak,ave}}$ ) of the SRTT14 shall be  $0.7 \pm 0.1$  at 65 km/h.

The average peak braking force coefficient ( $\mu_{\text{peak,ave}}$ ) of the SRTT14 shall be corrected for the wetted road surface temperature as follows:

Peak braking force coefficient ( $\mu_{\text{peak,ave}}$ ) = peak braking force coefficient (measured) + temperature correction

Temperature correction =  $0.0035 \times (t - 20)$

Where t is the wetted road surface temperature in degrees Celsius.

#### 3.12.2.2.3. Atmospheric conditions

The wind conditions shall not interfere with wetting of the surface (wind-shields are allowed).

Both the wetted surface temperature and the ambient temperature shall be between 2 °C and 20 °C for snow tyres and 5 °C and 35 °C for normal tyres.

The wetted surface temperature shall not vary during the test by more than 10 °C.

The ambient temperature must remain close to the wetted surface temperature; the difference between the ambient and the wetted surface temperatures must be less than 10 °C.

#### 3.12.2.3. Testing methods for measuring wet grip

For the calculation of the wet grip index (G) of a candidate tyre, the wet grip braking performance of the candidate tyre is compared to the wet grip braking performance of the reference tyre on a vehicle travelling straight ahead on a wet, paved surface. It is measured with one of the following methods:

- (a) Vehicle method consisting of testing a set of tyres mounted on an instrumented passenger car;
- (b) Testing method using a trailer towed by a vehicle or a tyre test vehicle, equipped with the test tyre(s).

##### 3.12.2.3.1. Testing method (a) using an instrumented passenger car

###### 3.12.2.3.1.1. Principle

The testing method covers a procedure for measuring the deceleration performance of C1 tyres during braking, using an instrumented passenger car equipped with an Antilock Braking System (ABS), where "instrumented passenger car" means a passenger car that is fitted with the measuring equipment listed in section 4.1.2.2. for the purpose of this testing method. Starting with a defined initial speed, the brakes are applied hard enough on four wheels at the same time to activate the ABS. The average deceleration is calculated between two pre-defined speeds.

###### 3.12.2.3.1.2. Equipment

###### 3.12.2.3.1.2.1. Vehicle

Permitted modifications on the passenger car are as follows:

- (a) Those allowing the number of tyre sizes that can be mounted on the vehicle to be increased;

- (b) Those permitting automatic activation of the braking device to be installed;
- (c) Any other modification of the braking system is prohibited.

#### 3.12.2.3.1.2.2. Measuring equipment

The vehicle shall be fitted with a sensor suitable for measuring speed on a wet surface and distance covered between two speeds.

To measure vehicle speed, a fifth wheel or non-contact speed-measuring system shall be used.

#### 3.12.2.3.1.3. Conditioning of the test track and wetting condition

The test track surface shall be watered at least half an hour prior to testing in order to equalize the surface temperature and water temperature. External watering should be supplied continuously throughout testing. For the whole testing area, the water depth shall be  $1.0 \pm 0.5$  mm, measured from the peak of the pavement.

The test track should then be conditioned by conducting at least ten test runs with tyres not involved in the test programme at 90 km/h.

#### 3.12.2.3.1.4. Tyres and rims

##### 3.12.2.3.1.4.1. Tyre preparation and break-in

The test tyres shall be trimmed to remove all protuberances on the tread surface caused by mould air vents or flashes at mould junctions.

Fit the test tyres on rims specified by a recognized tyre and rim standards organization as listed in Annex 7.

##### 3.12.2.3.1.4.2. Tyre load

The static load on each axle tyre shall lie between 60 per cent and 90 per cent of the tested tyre load capacity. Tyre loads on the same axle should not differ by more than 10 per cent.

##### 3.12.2.3.1.4.3. Tyre inflation pressure

On the front and rear axles, the inflation pressures shall be 220 kPa (for standard- and extra load tyres). The tyre pressure should be checked just prior to testing at ambient temperature and adjusted if required.

#### 3.12.2.3.1.5. Procedure

##### 3.12.2.3.1.5.1. Test run

The following test procedure applies for each test run.

##### 3.12.2.3.1.5.1.1. The passenger car is driven in a straight line up to $85 \pm 2$ km/h.

##### 3.12.2.3.1.5.1.2. Once the passenger car has reached $85 \pm 2$ km/h, the brakes are always activated at the same place on the test track referred to as "braking starting point", with a longitudinal tolerance of 5 m and a transverse tolerance of 0.5 m.

##### 3.12.2.3.1.5.1.3. The brakes are activated either automatically or manually.

##### 3.12.2.3.1.5.1.3.1. The automatic activation of the brakes is performed by means of a detection system made of two parts, one indexed to the test track and one on board the passenger car.

3.12.2.3.1.5.1.3.2. The manual activation of the brakes depends on the type of transmission as follows. In both cases, a minimum of 600 N pedal efforts is required.

For manual transmission, the driver should release the clutch and depress the brake pedal sharply, holding it down as long as necessary to perform the measurement.

For automatic transmission, the driver should select neutral gear and then depress the brake pedal sharply, holding it down as long as necessary to perform the measurement.

3.12.2.3.1.5.1.4. The average deceleration is calculated between 80 km/h and 20 km/h.

If any of the specifications listed above (including speed tolerance, longitudinal and transverse tolerance for the braking starting point, and braking time) are not met when a test run is made, the measurement is discarded and a new test run is made.

3.12.2.3.1.5.2. Test cycle

A number of test runs are made in order to measure the wet grip index of a set of candidate tyres (T) according to the following procedure, whereby each test run shall be made in the same direction and up to three different sets of candidate tyres may be measured within the same test cycle:

3.12.2.3.1.5.2.1. First, the set of reference tyres are mounted on the instrumented passenger car.

3.12.2.3.1.5.2.2. After at least three valid measurements have been made in accordance with section 4.1.5.1., the set of reference tyres is replaced by a set of candidate tyres.

3.12.2.3.1.5.2.3. After six valid measurements of the candidate tyres are performed, two more sets of candidate tyres may be measured.

3.12.2.3.1.5.2.4. The test cycle is closed by three more valid measurements of the same set of reference tyres as at the beginning of the test cycle.

Examples:

(a) The run order for a test cycle of three sets of candidate tyres (T1 to T3) plus a set of reference tyres (R) would be the following:

R-T1-T2-T3-R

(b) The run order for a test cycle of five sets of candidate tyres (T1 to T5) plus a set of reference tyres (R) would be the following:

R-T1-T2-T3-R-T4-T5-R

3.12.2.3.1.6. Processing of measurement results

3.12.2.3.1.6.1. Calculation of the average deceleration (AD)

The average deceleration (AD) is calculated for each valid test run in  $m/s^2$  as follows:

$$AD = \left| \frac{S_f^2 - S_i^2}{2d} \right|$$

where:

$S_f$  is the final speed in m/s;  $S_f = 20 \text{ km/h} = 5.556 \text{ m/s}$

$S_i$  is the initial speed in m/s;  $S_i = 80 \text{ km/h} = 22.222 \text{ m/s}$

$d$  is the distance covered between  $S_i$  and  $S_f$  in metre.

#### 3.12.2.3.1.6.2. Validation of results

The AD coefficient of variation is calculated as follows:

(Standard Deviation / Average) x 100.

For the reference tyres (R): If the AD coefficient of variation of any two consecutive groups of three tests runs of the reference tyre set is higher than 3 per cent, all data should be discarded and the test repeated for all test tyres (the candidate tyres and the reference tyres).

For the candidate tyres (T): The AD coefficients of variation are calculated for each candidate tyre set. If one coefficient of variation is higher than 3 per cent, the data should be discarded and the test repeated for that candidate tyre set.

#### 3.12.2.3.1.6.3. Calculation of adjusted average deceleration (Ra)

The average deceleration (AD) of the reference tyre set used for the calculation of its braking force coefficient is adjusted according to the positioning of each candidate tyre set in a given test cycle.

This adjusted AD of the reference tyre ( $R_a$ ) is calculated in  $\text{m/s}^2$  in accordance with the following table where  $R_1$  is the average of the AD values in the first test of the reference tyre set (R) and  $R_2$  is the average of the AD values in the second test of the same reference tyre set (R).

<i>Number of sets of candidate tyres within one test cycle</i>	<i>Set of candidate tyres</i>	<i>R<sub>a</sub></i>
1 ( $R_1$ -T1- $R_2$ )	T1	$R_a = 1/2 (R_1 + R_2)$
2 ( $R_1$ -T1-T2- $R_2$ )	T1	$R_a = 2/3 R_1 + 1/3 R_2$
	T2	$R_a = 1/3 R_1 + 2/3 R_2$
3 ( $R_1$ -T1-T2-T3- $R_2$ )	T1	$R_a = 3/4 R_1 + 1/4 R_2$
	T2	$R_a = 1/2 (R_1 + R_2)$
	T3	$R_a = 1/4 R_1 + 3/4 R_2$

#### 3.12.2.3.1.6.4. Calculation of the braking force coefficient (BFC)

The braking force coefficient (BFC) is calculated for a braking on the two axles according to the following table where  $T_a$  ( $a = 1, 2$  or  $3$ ) is the average of the AD values for each candidate tyre (T) set that is part of a test cycle

Test Tyre	Braking force coefficient
Reference tyre	$BFC(R) =   Ra/g  $
Candidate tyre	$BFC(T) =   Ta/g  $
$g$ is the acceleration due to gravity, $g = 9.81 \text{ m/s}^2$	

## 3.12.2.3.1.6.5. Calculation of the wet grip index of the candidate tyre

The wet grip index of the candidate tyre (G(T)) is calculated as follows:

$$G(T) = \left[ \frac{BF(T)}{BF(R)} \cdot 125 + a \cdot (t - t_0) + b \cdot \left( \frac{BF(R)}{BF(R_0)} - 1.0 \right) \right] \times 10^{-2}$$

where:

t is the measured wet surface temperature in degree Celsius when the candidate tyre (T) is tested

t<sub>0</sub> is the wet surface reference temperature condition, t<sub>0</sub> = 20 °C for normal tyres and t<sub>0</sub> = 10 °C for snow tyres

BFC(R<sub>0</sub>) is the braking force coefficient for the reference tyre in the reference conditions, BFC(R<sub>0</sub>) = 0.68

a = -0.4232 and b = -8.297 for normal tyres, a = 0.7721 and b = 31.18 for snow tyres. a is expressed as (1/°C)

## 3.12.2.3.1.7. Wet grip performance comparison between a candidate tyre and a reference tyre using a control tyre

## 3.12.2.3.1.7.1. General

Where the candidate tyre size is significantly different from that of the reference tyre, a direct comparison on the same instrumented passenger car may not be possible. This testing method uses an intermediate tyre, hereinafter called the control tyre as defined in paragraph 2.5.

## 3.12.2.3.1.7.2. Principle of the approach

The principle is the use of a control tyre set and two different instrumented passenger cars for the test cycle of a candidate tyre set in comparison with a reference tyre set.

One instrumented passenger car is fitted with the reference tyre set followed by the control tyre set, the other with the control tyre set followed by the candidate tyre set.

The specifications listed in sections 4.1.2. to 4.1.4. apply.

The first test cycle is a comparison between the control tyre set and the reference tyre set.

The second test cycle is a comparison between the candidate tyre set and the control tyre set. It is done on the same test track and during the same day as the first test cycle. The wetted surface temperature shall be within ±5 °C of the temperature of the first test cycle. The same control tyre set shall be used for the first and the second test cycles.

The wet grip index of the candidate tyre (G(T)) is calculated as follows:

$$G(T) = G_1 \cdot G_2$$

where:

G<sub>1</sub> is the relative wet grip index of the control tyre (C) compared to the reference tyre (R) calculated as follows:

$$G_1 = \left[ \frac{BF (C)}{BF (R)} \cdot 125 + a \cdot (t - t_0) + b \cdot \left( \frac{BF (R)}{BF (R_0)} - 1.0 \right) \right] \cdot 10^{-2}$$

$G_2$  is the relative wet grip index of the candidate tyre (T) compared to the control tyre (C) calculated as follows:

$$G_2 = \frac{BF (T)}{BF (C)}$$

#### 3.12.2.3.1.7.3. Storage and preservation

It is necessary that all the tyres of a control tyre set have been stored in the same conditions. As soon as the control tyre set has been tested in comparison with the reference tyre, the specific storage conditions defined in ASTM E 1136-93 (Reapproved 2003) shall be applied.

#### 3.12.2.3.1.7.4. Replacement of reference tyres and control tyres

When irregular wear or damage results from tests, or when wear influences the test results, the use of the tyre shall be discontinued.

#### 3.12.2.3.2. Testing method (b) using a trailer towed by a vehicle or a tyre test vehicle

##### 3.12.2.3.2.1. Principle

The measurements are conducted on test tyres mounted on a trailer towed by a vehicle (hereafter referred to as tow vehicle) or on a tyre test vehicle. The brake in the test position is applied firmly until sufficient braking torque is generated to produce the maximum braking force that will occur prior to wheel lockup at a test speed of 65 km/h.

##### 3.12.2.3.2.2. Equipment

###### 3.12.2.3.2.2.1. Tow vehicle and trailer or tyre test vehicle

The tow vehicle or the tyre test vehicle shall have the capability of maintaining the specified speed of  $65 \pm 2$  km/h even under the maximum braking forces.

The trailer or the tyre test vehicle shall be equipped with one place where the tyre can be fitted for measurement purposes hereafter called 'test position' and the following accessories:

- (a) Equipment to activate brakes in the test position;
- (b) A water tank to store sufficient water to supply the road surface wetting system, unless external watering is used;
- (c) Recording equipment to record signals from transducers installed at the test position and to monitor water application rate if the self-watering option is used.

The maximum variation of toe-settings and camber angle for the test position shall be within  $\pm 0.5^\circ$  with maximum vertical load. Suspension arms and bushings shall have sufficient rigidity necessary to minimize free play and ensure compliance under application of maximum braking forces. The suspension system shall provide adequate load-carrying capacity and be of such a design as to isolate suspension resonance.

The test position shall be equipped with a typical or special automotive brake system which can apply sufficient braking torque to produce the maximum value of braking test wheel longitudinal force at the conditions specified.

The brake application system shall be able to control the time interval between initial brake application and peak longitudinal force as specified in paragraph 3.12.2.3.2.7.1.

The trailer or the tyre test vehicle shall be designed to accommodate the range of candidate tyre sizes to be tested.

The trailer or the tyre test vehicle shall have provisions for adjustment of vertical load as specified in paragraph 3.12.2.3.2.5.2.

#### 3.12.2.3.2.2.2. Measuring equipment

The test wheel position on the trailer or the tyre test vehicle shall be equipped with a rotational wheel velocity measuring system and with transducers to measure the braking force and vertical load at the test wheel.

General requirements for measurement system: The instrumentation system shall conform to the following overall requirements at ambient temperatures between 0 °C and 45 °C:

- (a) Overall system accuracy, force:  $\pm 1.5$  per cent of the full scale of the vertical load or braking force;
- (b) Overall system accuracy, speed:  $\pm 1.5$  per cent of speed or  $\pm 1.0$  km/h, whichever is greater.

Vehicle speed: To measure vehicle speed, a fifth wheel or non-contact precision speed-measuring system should be used.

Braking forces: The braking force-measuring transducers shall measure longitudinal force generated at the tyre–road interface as a result of brake application within a range from 0 per cent to at least 125 per cent of the applied vertical load. The transducer design and location shall minimize inertial effects and vibration-induced mechanical resonance.

Vertical load: The vertical load-measuring transducer shall measure the vertical load at the test position during brake application. The transducer shall have the same specifications as described previously.

Signal conditioning and recording system: All signal conditioning and recording equipment shall provide linear output with necessary gain and data reading resolution to meet the specified previous requirements. In addition, the following requirements apply:

- (a) The minimum frequency response shall be flat from 0 Hz to 50 Hz (100 Hz) within  $\pm 1$  per cent full scale;
- (b) The signal-to-noise ratio shall be at least 20/1;
- (c) The gain shall be sufficient to permit full-scale display for full-scale input signal level;
- (d) The input impedance shall be at least ten times larger than the output impedance of the signal source;
- (e) The equipment shall be insensitive to vibrations, acceleration, and changes in ambient temperature.



3.12.2.3.2.3. Conditioning of the test track

The test track should be conditioned by conducting at least ten test runs with tyres not involved in the test program at  $65 \pm 2$  km/h.

3.12.2.3.2.4. Wetting conditions

The tow vehicle and trailer or the tyre test vehicle may be optionally equipped with a pavement-wetting system, less the storage tank, which, in the case of the trailer, is mounted on the tow vehicle. The water being applied to the pavement ahead of the test tyres shall be supplied by a nozzle suitably designed to ensure that the water layer encountered by the test tyre has a uniform cross section at the test speed with a minimum splash and overspray.

The nozzle configuration and position shall ensure that the water jets are directed towards the test tyre and pointed towards the pavement at an angle of  $20^\circ$  to  $30^\circ$ .

The water shall strike the pavement 250 mm to 450 mm ahead of the centre of tyre contact. The nozzle shall be located 25 mm above the pavement or at the minimum height required to clear obstacles which the tester is expected to encounter, but in no case more than 100 mm above the pavement.

The water layer shall be at least 25 mm wider than the test tyre tread and applied so the tyre is centrally located between the edges. Water delivery rate shall ensure a water depth of  $1.0 \pm 0.5$  mm and shall be consistent throughout the test to within  $\pm 10$  per cent. The volume of water per unit of wetted width shall be directly proportional to the test speed. The quantity of water applied at 65 km/h shall be 18 l/s per meter of width of wetted surface in case of a water depth of 1.0 mm.

3.12.2.3.2.5. Tyres and rims

3.12.2.3.2.5.1. Tyre preparation and break-in

The test tyres shall be trimmed to remove all protuberances on the tread surface caused by mould air vents or flashes at mould junctions.

The test tyre shall be mounted on the test rim declared by the tyre manufacturer.

A proper bead seat should be achieved by the use of a suitable lubricant. Excessive use of lubricant should be avoided to prevent slipping of the tyre on the wheel rim.

The test tyres/rim assemblies shall be stored in a location for a minimum of two hours such that they all have the same ambient temperature prior to testing. They should be shielded from the sun to avoid excessive heating by solar radiation.

For tyre break-in, at least two braking runs shall be performed under the load, pressure and speed as specified in paragraphs 3.12.2.3.4.2.5.2, 3.12.2.3.4.2.5.3 and 3.12.2.3.4.2.7.1 respectively.

3.12.2.3.2.5.2. Tyre load

The test load on the test tyre is  $75 \pm 5$  per cent of the tyre load capacity.

3.12.2.3.2.5.3. Tyre inflation pressure

The test tyre cold inflation pressure shall be 180 kPa for standard-load tyres. For extra load tyres, the cold inflation pressure shall be 220 kPa.

The tyre pressure should be checked just prior to testing at ambient temperature and adjusted if required.

3.12.2.3.2.6. Preparation of the tow vehicle and trailer or the tyre test vehicle

3.12.2.3.2.6.1. Trailer

For one axle trailers, the hitch height and transverse position shall be adjusted once the test tyre has been loaded to the specified test load in order to avoid any disturbance of the measuring results. The longitudinal distance from the centre line of the articulation point of the coupling to the transverse centre line of the axle of the trailer shall be at least ten times the "hitch height" or the "coupling (hitch) height".

3.12.2.3.2.6.2. Instrumentation and equipment

Install the fifth wheel, when used, in accordance with the manufacturer's specifications and locate it as near as possible to the mid-track position of the tow trailer or the tyre test vehicle.

3.12.2.3.2.7. Procedure

3.12.2.3.2.7.1. Test run

The following procedure applies for each test run:

3.12.2.3.2.7.1.1. The tow vehicle or the tyre test vehicle is driven onto the test track in a straight line at the specified test speed  $65 \pm 2$  km/h.

3.12.2.3.2.7.1.2. The recording system is launched.

3.12.2.3.2.7.1.3. Water is delivered to the pavement ahead of the test tyre approximately 0.5 s prior to brake application (for internal watering system).

3.12.2.3.2.7.1.4. The trailer brakes are activated within 2 metres of a measurement point of the wetted frictional properties of the surface and sand depth in accordance with paragraphs 3.12.2.2.1.4. and 3.12.2.2.1.5.. The rate of braking application shall be such that the time interval between initial application of force and peak longitudinal force is in the range 0.2 s to 0.5 s.

3.12.2.3.2.7.1.5. The recording system is stopped.

3.12.2.3.2.7.2. Test cycle

A number of test runs are made in order to measure the wet grip index of the candidate tyre (T) according to the following procedure, whereby each test run shall be made from the same spot on the test track and in the same direction. Up to three candidate tyres may be measured within the same test cycle, provided that the tests are completed within one day.

3.12.2.3.2.7.2.1. First, the reference tyre is tested.

3.12.2.3.2.7.2.2. After at least six valid measurements are performed in accordance with paragraph 3.12.2.3.2.7.1. the reference tyre is replaced by the candidate tyre.

3.12.2.3.2.7.2.3. After six valid measurements of the candidate tyre are performed, two more candidate tyres may be measured.

3.12.2.3.2.7.2.4. The test cycle is closed by six more valid measurements of the same reference tyre as at the beginning of the test cycle.

Examples:

- (a) The run order for a test cycle of three candidate tyres (T1 to T3) plus the reference tyre (R) would be the following:

R-T1-T2-T3-R

- (b) The run order for a test cycle of five candidate tyres (T1 to T5) plus the reference tyre R would be the following:

R-T1-T2-T3-R-T4-T5-R

#### 3.12.2.3.2.8. Processing of measurement results

##### 3.12.2.3.2.8.1. Calculation of the peak braking force coefficient

The tyre peak braking force coefficient ( $\mu_{\text{peak}}$ ) is the highest value of  $\mu(t)$  before lockup occurs calculated as follows for each test run. Analogue signals should be filtered to remove noise. Digitally recorded signals must be filtered using a moving average technique.

$$\mu(t) = \left| \frac{fh(t)}{fv(t)} \right|$$

where:

$\mu(t)$  is the dynamic tyre braking force coefficient in real time;

$fh(t)$  is the dynamic braking force in real time, in N;

$fv(t)$  is the dynamic vertical load in real time, in N.

##### 3.12.2.3.2.8.2. Validation of results

The  $\mu_{\text{peak}}$  coefficient of variation is calculated as follows:

(Standard Deviation / Average) x 100

For the reference tyre (R): If the coefficient of variation of the peak braking force coefficient ( $\mu_{\text{peak}}$ ) of the reference tyre is higher than 5 per cent, all data should be discarded and the test repeated for all test tyres (the candidate tyre(s) and the reference tyre).

For the candidate tyre(s) (T): The coefficient of variation of the peak braking force coefficient ( $\mu_{\text{peak}}$ ) is calculated for each candidate tyre. If one coefficient of variation is higher than 5 per cent, the data should be discarded and the test repeated for this candidate tyre.

##### 3.12.2.3.2.8.3. Calculation of the adjusted average peak braking force coefficient

The average peak braking force coefficient of the reference tyre used for the calculation of its braking force coefficient is adjusted according to the positioning of each candidate tyre in a given test cycle.

This adjusted average peak braking force coefficient of the reference tyre ( $R_a$ ) is calculated in accordance with the following table where  $R_1$  is the average peak tyre braking coefficient in the first test of the reference tyre (R) and  $R_2$  is the average peak tyre braking coefficient in the second test of the same reference tyre (R).

Number of candidate tyre(s) within one test cycle	Candidate tyre	Ra
1 (R <sub>1</sub> -T1-R <sub>2</sub> )	T1	Ra = 1/2 (R <sub>1</sub> + R <sub>2</sub> )
2 (R <sub>1</sub> -T1-T2-R <sub>2</sub> )	T1	Ra = 2/3 R <sub>1</sub> + 1/3 R <sub>2</sub>
	T2	Ra = 1/3 R <sub>1</sub> + 2/3 R <sub>2</sub>
3 (R <sub>1</sub> -T1-T2-T3-R <sub>2</sub> )	T1	Ra = 3/4 R <sub>1</sub> + 1/4 R <sub>2</sub>
	T2	Ra = 1/2 (R <sub>1</sub> + R <sub>2</sub> )
	T3	Ra = 1/4 R <sub>1</sub> + 3/4 R <sub>2</sub>

3.12.2.3.2.8.4. Calculation of the average peak braking coefficient ( $\mu_{peak,ave}$ )

The average value of the peak braking coefficients ( $\mu_{peak,ave}$ ) is calculated according to the following table whereby Ta (a= 1, 2 or 3) is the average of the peak braking force coefficients measured for one candidate tyre within one test cycle.

Test tyre	$\mu_{peak,ave}$
Reference tyre	$\mu_{peak,ave}(R)=Ra$ as per Table 3
Candidate tyre	$\mu_{peak,ave}(T) = Ta$

3.12.2.3.2.8.5. Calculation of the wet grip index of the candidate tyre

The wet grip index of the candidate tyre (G(T)) is calculated as follows:

$$G(T) = \left[ \frac{\mu_{peak,ave}(T)}{\mu_{peak,ave}(R)} \cdot 125 \cdot a \cdot (t - t_0) + b \cdot \left( \frac{\mu_{peak,ave}(R)}{\mu_{peak,ave}(R_0)} - 1.0 \right) \right] \cdot 10^{-2}$$

where:

t is the measured wet surface temperature in degree Celsius when the candidate tyre (T) is tested

t<sub>0</sub> is the wet surface reference temperature condition

t<sub>0</sub> = 20 °C for normal tyres t<sub>0</sub>=10°C for snow tyres

$\mu_{peak,ave}(R_0) = 0.85$  is the peak braking force coefficient for the reference tyre in the reference conditions

a = -0.4232 and b = -8.297 for normal tyres, a = 0.7721 and b = 31.18 for snow tyres" a is expressed as (1/°C)

3.12.3. C2 and C3 category tyres

3.12.3.1. General test conditions

3.12.3.1.1. Track characteristics

The surface shall be a dense asphalt surface with a uniform gradient of not more than two per cent and shall not deviate more than 6 mm when tested with a 3 m straightedge.

The test surface shall have a pavement of uniform age, composition, and wear. The test surface shall be free of loose material or foreign deposits.

The maximum chipping size shall be from 8 mm to 13 mm.

The sand depth measured as specified in EN13036-1:2001 and ASTM E 965-96 (reapproved 2006) shall be  $0.7 \pm 0.3$  mm.

The surface friction value for the wetted track shall be established by one or other of the following methods.

#### 3.12.3.1.1.1. Standard reference test tyre (SRTT) method

The average peak braking coefficient ( $\mu$  peak average) of the ASTM E1136 - 93 (reapproved 2003) reference tyre (Test method using a trailer or a tyre test vehicle as specified in clause 2.1) shall be  $0.7 \pm 0.1$  (at 65 km/h and 180 kPa). The measured values shall be corrected for the effects of temperature as follows:

$$pbfc = pbfc (\text{measured}) + 0.0035(t - 20)$$

Where "t" is the wetted track surface temperature in degrees Celsius.

The test shall be conducted using the lanes and length of the track to be used for the wet grip test.

For the trailer method, testing is run in such a way that braking occurs within 10 metres distance of where the surface was characterized.

#### 3.12.3.1.1.2. British Pendulum Number (BPN) method

The averaged British Pendulum Number (BPN) British Pendulum Tester method as specified in ASTM E 303-93 (reapproved 2008) using the Pad as specified in ASTM E 501-08 shall be  $(50 \pm 10)$  BPN after temperature correction.

BPN shall be corrected by the wetted road surface temperature. Unless temperature correction recommendations are indicated by the British pendulum manufacturer the following formula can be used:

$$BPN = BPN (\text{measured value}) - (0.0018 \cdot t^2) + 0.34 \cdot t - 6.1$$

Where: "t" is the wetted road surface temperature in degrees Celsius.

Effects of slider pad wear: the pad should be removed for maximum wear when the wear on the striking edge of the slider reaches 3.2 mm in the plane of the slider or 1.6 mm vertical to it.

Check the test track testing surface BPN consistency for the measurement of wet grip on a standard vehicle.

In the lanes of the track to be used during the wet grip tests, the BPN shall be measured at intervals of 10 m along the length of the lanes. The BPN shall be measured 5 times at each point and the coefficient of variation of the BPN averages shall not exceed 10 per cent.

#### 3.12.3.1.2. The surface may be wetted from the track-side or by a wetting system incorporated into the test vehicle or the trailer.

If a track-side system is used, the test surface shall be wetted for at least half an hour prior to testing in order to equalize the surface temperature and water temperature. It is recommended that track-side wetting be continuously applied throughout testing.

The water depth shall be between 0.5 and 2.0 mm.

- 3.12.3.1.3. The wind conditions shall not interfere with wetting of the surface (wind-shields are permitted).

The ambient and the wetted surface temperature shall be between 5 °C and 35 °C and shall not vary during the test by more than 10 °C.

- 3.12.3.1.4. In order to cover the range of the tyre sizes fitting the commercial vehicles, three Standard Reference Testing Tyre (SRTT) sizes shall be used to measure the relative wet index:

- (a) SRTT 315/70R22.5 LI=154/150, ASTM F2870
- (b) SRTT 245/70R19.5 LI=136/134, ASTM F2871
- (c) SRTT 225/75 R 16 C LI=116/114, ASTM F2872

The three standard reference testing tyre sizes shall be used to measure the relative wet index as shown in the following table:

<i>For C3 tyres</i>	
Narrow family $S_{Nominal} < 285$ mm	Wide family $S_{Nominal} \geq 285$ mm
SRTT 245/70R19.5 LI=136/134	SRTT 315/70R22.5 LI=154/150
<i>For C2 tyres</i>	
SRTT 225/75 R 16 C LI=116/114	
$S_{Nominal}$ = Tyre nominal section width	

- 3.12.3.2. Test procedure

The comparative wet grip performance shall be established using either:

- (a) A trailer or special purpose tyre evaluation vehicle; or
- (b) A standard production vehicle ( $M_2$ ,  $M_3$ ,  $N_1$ ,  $N_2$  or  $N_3$ , category) as defined in Special Resolution No. 1 concerning the common definitions of vehicle categories, masses and dimensions (S.R.1) contained in ECE/TRANS/WP.29/1045 and subsequent amendments.

- 3.12.3.2.1. Trailer or special purpose tyre evaluation vehicle procedure

- 3.12.3.2.1.1. The measurements are conducted on (a) tyre(s) mounted on a trailer towed by a vehicle or a tyre test vehicle.

The brake on the test position is applied firmly until sufficient braking torque results to produce maximum braking force that will occur prior to wheel lockup at a test speed of 50 km/h. The trailer, together with the towing vehicle, or the tyre evaluation vehicle shall comply with the following requirements:

- 3.12.3.2.1.1.1. Be capable of exceeding the upper limit for the test speed of 50 km/h and of maintaining the test speed requirement of  $(50 \pm 2)$  km/h even at the maximum level of application of braking forces;
- 3.12.3.2.1.1.2. Be equipped with an axle providing one test position having an hydraulic brake and actuation system that can be operated at the test position from the towing vehicle if applicable. The braking system shall be capable of providing sufficient braking torque to achieve the peak brake force coefficient over the range of tyre sizes and tyre loads to be tested;

3.12.3.2.1.1.3. Be capable of maintaining longitudinal alignment (toe) and camber of the test wheel and tyre assembly throughout the test within  $\pm 0.5^\circ$  of the static figures achieved at the test tyre loaded condition;

3.12.3.2.1.1.4. In the case a track wetting system is incorporated:

The system shall be able to deliver the water such that the tyre and track surface in front of the tyre are wetted before the start of braking and throughout the duration of the test. The apparatus may be optionally equipped with a pavement-wetting system, less the storage tank, which, in the case of the trailer, is mounted on the tow vehicle. The water being applied to the pavement ahead of the test tyres shall be supplied by a nozzle suitably designed to ensure that the water layer encountered by the test tyre has a uniform cross section at the test speed with a minimum splash and overspray.

The nozzle configuration and position shall ensure that the water jets shall be directed toward the test tyre and pointed toward the pavement at an angle of 15 to 30°. The water shall strike the pavement 0.25 to 0.5 m ahead of the centre of tyre contact. The nozzle shall be located 100 mm above the pavement or the minimum height required to clear obstacles which the tester is expected to encounter, but in no case more than 200 mm above the pavement. The water layer shall be at least 25 mm wider than the test tyre tread and applied so the tyre is centrally located between the edges. The volume of water per unit of wetted width shall be directly proportional to the test speed. The quantity of water applied at 50 km/h shall be 14 l/s per meter of the width of the wetted surface. The nominal values of rate of water application shall be maintained within  $\pm 10$  per cent.

3.12.3.2.1.2. Test procedure

3.12.3.2.1.2.1. Fit the test tyres on rims specified by a recognized tyre and rim standards organization as listed in Annex 7. Ensure proper bead seating by the use of a suitable lubricant. Excessive use of lubricant should be avoided to prevent slipping of the tyre on the wheel rim.

Check the test tyres for the specified inflation pressure at ambient temperature (cold), just prior to testing. For the purpose of this standard the testing tyre cold inflation pressure  $P_t$  shall be calculated as follows:

$$P_t = P_r \cdot \left( \frac{Q_t}{Q_r} \right)^{1.25}$$

Where:

$P_r$ = Inflation pressure marked on the sidewall. If  $P_r$  is not marked on the sidewall refer to the specified pressure in applicable tyre standards manuals corresponding to maximum load capacity for single applications

$Q_t$ = The static test load of the tyre

$Q_r$ = The maximum mass associated with the load index of the tyre

3.12.3.2.1.2.2. For tyre break-in, two braking runs are performed. The tyre shall be conditioned for a minimum of two hours such that it is stabilized at the ambient temperature of the test track area. The tyre(s) shall not be exposed to direct sunshine during conditioning.

3.12.3.2.1.2.3. The load conditions for testing shall be  $75 \pm 5$  per cent of the value corresponding to the load index.

- 3.12.3.2.1.2.4. Shortly before testing, the track shall be conditioned by carrying out at least ten braking test runs at 50 km/h on the part of the track to be used for the performance test programme but using a tyre not involved in that programme;
- 3.12.3.2.1.2.5. Immediately prior to testing, the tyre inflation pressure shall be checked and reset, if necessary, to the values given in paragraph 3.12.3.2.1.2.1.
- 3.12.3.2.1.2.6. The test speed shall be at  $50 \pm 2$  km/h and shall be maintained between these limits throughout the test run.
- 3.12.3.2.1.2.7. The direction of the test shall be the same for each set of tests and shall be the same for the test tyre as that used for the SRTT with which its performance is to be compared.
- 3.12.3.2.1.2.8. Deliver water to the pavement ahead of the test tyre approximately 0.5 s prior to brake application (for internal watering system). The brakes of the test wheel assembly shall be applied such that peak braking force is achieved within 0.2 s and 1.0 s of brake application.
- 3.12.3.2.1.2.9. For new tyres, the first two braking runs are discarded for tyre break-in.
- 3.12.3.2.1.2.10. For the evaluation of the performance of any tyre compared with that of the SRTT, the braking test should be run at the same area on the test pad.
- 3.12.3.2.1.2.11. The order of testing shall be:

R1 - T - R2

Where:

R1 = the initial test of the SRTT,

R2 = the repeat test of the SRTT and

T = the test of the candidate tyre to be evaluated.

A maximum of three candidate tyres may be tested before repeating the SRTT test, for example:

R1 - T1 - T2 - T3 - R2

- 3.12.3.2.1.2.12. Calculate the peak braking force coefficient,  $\mu_{\text{peak}}$ , for each test using the following equation:

$$\mu(t) = \left| \frac{f_h(t)}{f_v(t)} \right| \quad (1)$$

Where:

$\mu(t)$  = dynamic tyre braking force coefficient in real time,

$f_h(t)$  = dynamic braking force in real time, N,

$f_v(t)$  = dynamic vertical load in real time, N.

Using equation (1) for dynamic tyre braking force coefficient, calculate the peak tyre braking force coefficient,  $\mu_{\text{peak}}$ , by determining the highest value of  $\mu(t)$  before lockup occurs. Analogic signals should be filtered to remove noise. Digitally recorded signals may be filtered using a moving average technique.



Calculate the average values of peak-braking coefficient ( $\mu_{\text{peak, ave}}$ ) by averaging four or more valid repeated runs for each set of test and reference tyres for each test condition provided that the tests are completed within the same day.

#### 3.12.3.2.1.2.13. Validation of results

For the reference tyre:

If the coefficient of variation of the peak braking coefficient, which is calculated by "standard deviation/average x 100" of the reference tyre is higher than five per cent, discard all data and repeat the test for this reference tyre.

For the candidate tyres:

The coefficients of variation (standard deviation/average x 100) are calculated for all the candidate tyres. If one coefficient of variation is greater than five per cent, discard the data for this candidate tyre and repeat the test.

If R1 is the average of the peak braking coefficient in the first test of the reference tyre, R2 is the average of the peak braking coefficient in the second test of the reference tyre, the following operations are performed, according to the following table:

<i>If the number of sets of candidate tyres between two successive runs of the reference tyre is:</i>	<i>and the set of candidate tyres to be qualified is:</i>	<i>then "Ra" is calculated by applying the following:</i>
1   R1 – T1 – R2	T1	Ra = 1/2 (R1 + R2)
2   R1 – T1 - T2 – R2	T1 T2	Ra = 2/3 R1 + 1/3 R2 Ra = 1/3 R1 + 2/3 R2
3   R1– T1 - T2 - T3 – R2	T1 T2 T3	Ra = 3/4 R1 + 1/4 R2 Ra = 1/2 (R1 + R2) Ra = 1/4 R1 + 3/4 R2

#### 3.12.3.2.1.2.14. The wet grip index (G) shall be calculated as:

$$\text{Wet grip index (G)} = \mu_{\text{peak,ave}} (\text{T}) / \mu_{\text{peak,ave}} (\text{R})$$

It represents the relative Wet Grip Index for braking performance of the candidate tyre (T) compared to the reference tyre (R).

#### 3.12.3.2.2. Standard vehicle procedure

##### 3.12.3.2.2.1. The vehicle used shall have two axles and be equipped with an anti-lock braking system (e.g. standard production vehicle of M<sub>2</sub>, M<sub>3</sub>, N<sub>1</sub>, N<sub>2</sub> or N<sub>3</sub> category). The ABS shall continue to fulfil the utilisation of adhesion requirements defined in the Regulations as appropriate, and shall be comparable and constant throughout the tests with the different tyres mounted.

##### 3.12.3.2.2.1.1. Measuring equipment

The vehicle shall be fitted with a sensor suitable for measuring speed on a wet surface and distance covered between two speeds.

To measure vehicle speed, a fifth wheel or non-contact speed-measuring system shall be used.

The following tolerances shall be respected:

- (a) For the speed measurements:  $\pm 1$  per cent or  $\pm 0.5$  km/h whichever is greater;
- (b) For the distance measurements:  $\pm 1 \times 10^{-1}$  m.

A display of the measured speed or the difference between the measured speed and the reference speed for the test can be used inside the vehicle so that the driver can adjust the speed of the vehicle.

A data acquisition system can be also used for storing the measurements.

#### 3.12.3.2.2.2. Test procedure

Starting with a defined initial speed, the brakes are applied hard enough on the two axles at the same time to activate the ABS system.

##### 3.12.3.2.2.2.1. The Average Deceleration (AD) is calculated between two defined speeds, with an initial speed of 60 km/h and a final speed of 20 km/h.

#### 3.12.3.2.2.2.2. Vehicle equipment

The rear axle may be indifferently fitted with 2 or 4 tyres.

For the reference tyre testing, both axles are fitted with reference tyres. (A total of 4 or 6 reference tyres depending on the choice above mentioned).

For the candidate tyre testing, 3 fitting configurations are possible:

- (a) Configuration "Configuration 1": Candidate tyres on front and rear axles: it is the standard configuration that should be used every time it is possible.
- (b) Configuration "Configuration 2": Candidate tyres on front axle and reference tyre or control tyre on rear axle: allowed in such cases where fitting the candidate tyre on the rear position is not possible.
- (c) Configuration "Configuration 3": Candidate tyres on rear axle and reference tyre or control tyre on front axle: permitted in such cases where fitting the candidate tyre on the front position is not possible.

#### 3.12.3.2.2.2.3. Tyre inflation pressure

- (a) For a vertical load higher or equal to 75 per cent of the load capacity of the tyre, the test inflation pressure " $P_t$ " shall be calculated as follows:

$$P_t = P_r \cdot (Q_t/Q_r)^{1.25}$$

$P_r$  = Inflation pressure marked on the sidewall. If  $P_r$  is not marked on the sidewall refer to the specified pressure in applicable tyre standards manuals corresponding to maximum load capacity for single applications

$Q_t$  = static test load of the tyre

$Q_r$  = maximum mass associated with the load index of the tyre

- (b) For a vertical load lower than 75 per cent of the load capacity of the tyre, the test inflation pressure  $P_t$  shall be calculated as follows:

$$P_t = P_r \cdot (0.75)^{1.25} = (0.7) \cdot P_r$$

$P_r$  = Inflation pressure marked on the sidewall.

If  $P_r$  is not marked on the sidewall refer to the specified pressure in applicable tyre standard manuals corresponding to maximum load capacity for single applications.

Check the tyre pressure just prior to testing at ambient temperature.

#### 3.12.3.2.2.2.4. Tyre load

The static load on each axle shall remain the same throughout the test procedure. The static load on each tyre shall lie between 60 per cent and 100 per cent of the candidate tyre's load capacity. This value shall not exceed 100 per cent of the load capacity of the reference tyre.

Tyre load on the same axle should not differ by more than 10 per cent.

The use of fitting as per Configurations 2 and 3 shall fulfil the following additional requirements:

Configuration 2: Front axle load > Rear axle load

The rear axle may be indifferently fitted with 2 or 4 tyres

Configuration 3: Rear axle load > Front axle load x 1.8

#### 3.12.3.2.2.2.5. Tyre preparation and break-in

##### 3.12.3.2.2.2.5.1. The test tyre shall be mounted on the test rim declared by the tyre manufacturer.

Ensure proper bead seating by the use of a suitable lubricant. Excessive use of lubricant should be avoided to prevent slipping of the tyre on the wheel rim.

##### 3.12.3.2.2.2.5.2. Place the fitted test tyres in a location for a minimum of two hours such that they all have the same ambient temperature prior to testing, and shield them from the sun to avoid excessive heating by solar radiation. For tyre break-in, perform two braking runs.

##### 3.12.3.2.2.2.5.3. Condition the pavement by conducting at least ten test runs with tyres not involved in the test programme at an initial speed higher or equal to 65 km/h (which is higher than the initial test speed to guarantee that a sufficient length of track is In the case of a new tyre).

#### 3.12.3.2.2.2.6. Procedure

##### 3.12.3.2.2.2.6.1. First, mount the set of reference tyres on the vehicle.

The vehicle accelerates in the starting zone up to  $65 \pm 2$  km/h.

Activation of the brakes on the track is made always at the same place with a tolerance of 5 metres in longitudinal and 0.5 metres in transverse.

##### 3.12.3.2.2.2.6.2. According to the type of transmission, two cases are possible:

###### (a) Manual transmission

As soon as the driver is in the measuring zone and having reached  $65 \pm 2$  km/h, the clutch is released and the brake pedal depressed sharply, holding it down as long as necessary to perform the measurement.

(b) Automatic transmission

As soon as the driver is in the measuring zone and having reached  $65 \pm 2$  km/h, select neutral gear and then the brake pedal is depressed sharply, holding it down as long as necessary to perform the measurement.

Automatic activation of the brakes can be performed by means of a detection system made of two parts, one indexed to the track and one embarked on the vehicle. In that case braking is made more rigorously at the same portion of the track.

If any of the above-mentioned conditions are not met when a measurement is made (speed tolerance, braking time, etc.), the measurement is discarded and a new measurement is made.

3.12.3.2.2.2.6.3. Test running order

Examples:

The run order for a test of 3 sets of candidate tyres (T1 to T3) plus a reference tyre R would be:

R - T1 - T2 - T3 - R

The run order for a test of 5 sets of tyres (T1 to T5) plus a reference tyre R would be:

R - T1 - T2 - T3 - R - T4 - T5 - R

3.12.3.2.2.2.6.4. The direction of the test shall be the same for each set of tests and shall be the same for the candidate test tyre as that used for the SRTT with which its performance is to be compared.

3.12.3.2.2.2.6.5. For each test and for new tires, the first two braking measurements are discarded.

3.12.3.2.2.2.6.6. After at least 3 valid measurements have been made in the same direction, the reference tyres are replaced by a set of the candidate tyres (one of the 3 configurations presented in paragraph 3.12.3.2.2.2.2.) and at least 6 valid measurements shall be performed.

3.12.3.2.2.2.6.7. A maximum of three sets of candidate tyres can be tested before the reference tyre is re-tested.

3.12.3.2.2.2.7. Processing of measurement results

3.12.3.2.2.2.7.1. Calculation of the Average Deceleration (AD)

Each time the measurement is repeated, the average deceleration AD ( $\text{m}\cdot\text{s}^{-2}$ ) is calculated by:

$$AD = \left| \frac{S_f^2 - S_i^2}{2d} \right|$$

Where d (m) is the distance covered between the initial speed  $S_i$  ( $\text{m}\cdot\text{s}^{-1}$ ) and the final speed  $S_f$  ( $\text{m}\cdot\text{s}^{-1}$ ).

3.12.3.2.2.2.7.2. Validation of results

For the reference tyre:

If the coefficient of variation of "AD" of any two consecutive groups of 3 runs of the reference tyre is higher than 3 per cent, discard all data and repeat

the test for all tyres (the candidate tyres and the reference tyre). The coefficient of variation is calculated by the following relation:

$$\frac{\text{standard deviation}}{\text{average}} \times 100$$

For the candidate tyres:

The coefficients of variation are calculated for all the candidate tyres.

$$\frac{\text{standard deviation}}{\text{average}} \times 100$$

If one coefficient of variation is greater than 3 per cent, discard the data for this candidate tyre and repeat the test.

#### 3.12.3.2.2.2.7.3. Calculation of the "average AD"

If R1 is the average of the AD values in the first test of the reference tyre and R2 is the average of the AD values in the second test of the reference tyre, the following operations are performed, according to the following table.

Ra is the adjusted average AD of the reference tyre.

<i>Number of sets of candidate tyres between two successive runs of the reference tyre</i>	<i>Set of candidate tyres to be qualified</i>	<i>Ra</i>
1 R1-T1-R2	T1	$Ra = 1/2 (R1 + R2)$
2 R1-T1-T2-R2	T1	$Ra = 2/3 R1 + 1/3 R2$
	T2	$Ra = 1/3 R1 + 2/3 R2$
3 R1-T1-T2-T3-R2	T1	$Ra = 3/4 R1 + 1/4 R2$
	T2	$Ra = 1/2 (R1 + R2)$
	T3	$Ra = 1/4 R1 + 3/4 R2$

#### 3.12.3.2.2.2.7.4. Calculation of braking force coefficient, BFC

BFC(R) and BFC(T) are calculated according to the following table:

<i>Tyre type</i>	<i>Braking force coefficient is</i>
Reference tyre	$BFC(R) = Ra/g$
Candidate tyre	$BFC(T) = Ta/g$
g is the acceleration due to gravity (rounded to $9.81 \text{ m}\cdot\text{s}^{-2}$ ).	

Ta (a = 1, 2, etc.) is the average of the AD values for a test of a candidate tyre.

#### 3.12.3.2.2.2.7.5. Calculation of the relative wet grip performance index of the tyre


The Wet grip index represents the relative performance of the candidate tyre compared to the reference tyre. The way to obtain it depends on the test configuration as defined in paragraph 3.12.3.2.2.2.2. The wet grip index of the tyre is calculated as reported into the following table:

Configuration C1: candidate tyres on both axles	$Wet\ Grip\ Index = \frac{BFC(T)}{BFC(R)}$
Configuration C2: candidate tyres on front axle and reference tyres on rear axle	$Wet\ Grip\ Index = \frac{(BFC(T) \cdot [a + b + h \cdot BFC(R)] - a \cdot BFC(R))}{BFC(R) \cdot [b + h \cdot BFC(T)]}$
Configuration C3: reference tyres on front axle and candidate tyres on rear axle	$Wet\ Grip\ Index = \frac{(BFC(T) \cdot [-a - b + h \cdot BFC(R)] + b \cdot BFC(R))}{BFC(R) \cdot [-a + h \cdot BFC(T)]}$

Where:

- "G": centre of gravity of the loaded vehicle;
  - "m": mass (in kilograms) of the loaded vehicle;
  - "a": horizontal distance between front axle and centre of gravity of the loaded vehicle (m);
  - "b": horizontal distance between rear axle and centre of gravity of the loaded vehicle;
  - "h": vertical distance between ground level and centre of gravity of the loaded vehicle (m);
- N.B.* When "h" is not precisely known, these worst case values shall apply: 1.2 for configuration C2, and 1.5 for configuration C3
- "γ" loaded vehicle acceleration (m·s<sup>-2</sup>);
  - "g" acceleration due to the gravity (m·s<sup>-2</sup>);
  - "X1" longitudinal (X-direction) reaction of the front tyre on the road;
  - "X2" longitudinal (X-direction) reaction of the rear tyre on the road;
  - "Z1" normal (Z-direction) reaction of the front tyre on the road;
  - "Z2" normal (Z-direction) reaction of the rear tyre on the road;

Figure 6  
Nomenclature explanation related to grip index of the tyre

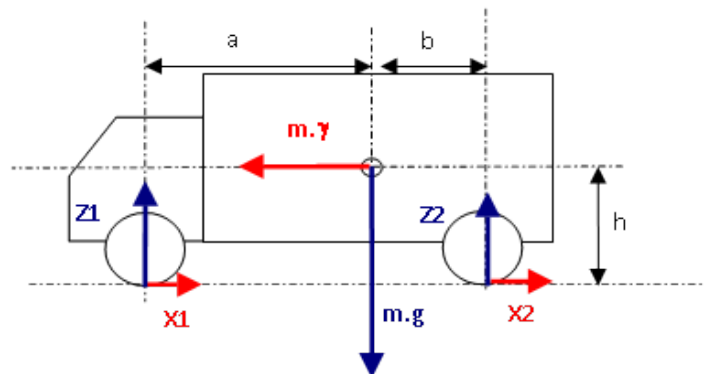

3.12.3.2.2.2.8. Wet grip performance comparison between a candidate tyre and a reference tyre using a control tyre

When the candidate tyre size is significantly different from the reference tyre, a direct comparison on the same vehicle may be not possible. This approach uses an intermediate tyre, hereinafter called the control tyre.

3.12.3.2.2.2.8.1. The principle lies upon the use of a control tyre and 2 different vehicles for assessing a candidate tyre in comparison with a reference tyre.

One vehicle can fit the reference tyre and the control tyre, the other the control tyre and the candidate tyre. All conditions are in conformity with paragraphs 3.12.3.2.2.1.2. to 3.12.3.2.2.2.5. above.

3.12.3.2.2.2.8.2. The first assessment is a comparison between the control tyre and the reference tyre. The result (Wet Grip Index 1) is the relative efficiency of the control tyre compared to the reference tyre.

3.12.3.2.2.2.8.3. The second assessment is a comparison between the candidate tyre and the control tyre. The result (Wet Grip Index 2) is the relative efficiency of the candidate tyre compared to the control tyre.

The second assessment is done on the same track as the first one and within one week maximum. The wetted surface temperature shall be in the range of  $\pm 5^{\circ}\text{C}$  of the temperature of the first assessment. The control tyre set (4 or 6 tyres) is physically the same set as the set used for the first assessment.

3.12.3.2.2.2.8.4. The wet grip index of the candidate tyre compared to the reference tyre is deduced by multiplying the relative efficiencies calculated above:

(Wet Grip Index 1 · Wet Grip Index 2)

*Note:* When the test expert decides to use an SRTT tyre as a control tyre (i.e. in the test procedure two SRTTs are compared directly instead of an SRTT with a control tyre) the result of the comparison between the SRTTs is called the "local shift factor".

It is permitted to use a previous SRTTs comparison.

The comparison results shall be checked periodically.

3.12.3.2.2.2.8.5. Selection of a set of tyres as a control tyre set

A "control tyre" set is a group of identical tyres made in the same factory during a one week period.

3.12.3.2.2.2.8.6. Reference and control tyres

Before the first assessment (control tyre / reference tyre), normal storage conditions can be used. It is necessary that all the tyres of a control tyre set have been stored in the same conditions.

3.12.3.2.2.2.8.7. Storage of control tyres

As soon as the control tyre set has been assessed in comparison with the reference tyre, specific storage conditions shall be applied for control tyres replacement.

3.12.3.2.2.2.8.8. Replacement of reference and control tyres

When irregular wear or damage results from tests, or when wear influences the test results, the use of the tyre shall be discontinued.

3.13. ~~Procedure to assess the flat tyre running mode of run flat tyres~~ Procedure to assess the flat tyre running mode of passenger car run flat tyres [AR38]

For run flat tyres identified by means of letter code "RF" within the size designation a load/speed test shall be carried out as specified in paragraph 3.13.1. below.

A run flat tyre tested in accordance with paragraph 3.13.1. shall be deemed to have passed the test if the tread remains connected to the two sidewalls and the deflected section height does not alter by a value greater than 20 per cent when compared to the deflected section height at the start of the test.

3.13.1. Test procedure

3.13.1.1. Mount a new tyre on the test rim specified by the manufacturer.

3.13.1.2. Condition the tyre at  $35 \pm 3$  °C and 250 kPa for three hours.

3.13.1.3. Remove the valve core and wait until the tyre deflates completely.

3.13.1.4. Mount the tyre-and-wheel assembly to a test axle and press it against the outer surface of a smooth wheel  $1.70 \text{ m} \pm 1$  per cent or  $2.0 \text{ m} \pm 1$  per cent in diameter.

3.13.1.5. Apply to the test axle a load equal to 65 per cent of the maximum load rating corresponding to the load index of the tyre.

3.13.1.6. At the start of the test, measure the deflected section height (Z1).

3.13.1.7. During the test the temperature of the test room shall be maintained at  $35 \pm 3$  °C.

3.13.1.8. Carry the test through, without interruption in conformity with the following particulars:

Time taken to pass from zero speed to constant test speed: 5 minutes;

Test speed: 80 km/h; Duration of test at the test speed: 60 minutes.

3.13.1.9. At the end of the test, measure the deflected section height (Z2).

3.13.1.10. Calculate the change in per cent of the deflected section height compared to the deflected section height at the start of the test as  $((Z1 - Z2) / Z1) 100$ .

3.14. Strength test for LT/C tyres

3.14.1. Requirements

When tested according to the procedure described in this section, LT/C tyres shall have an average strength of not less than the values shown in the table below:

Test Pressure, specified inflation pressure from the tyre manufacturer kPa pressure for	Minimum Breaking Energy (Joule)	
	Nominal Section width (mm)	
170-199		293
200-299	293	361
300-399	361	514
400-499	514	576
500-599	576	

[AR39]



Load range	Minimum breaking energy	
	Joules (J)	Inch-pounds (in-lbs)
B	293	2600
C	361	3200
D	514	4550
E	576	5100

**3.14.1 Requirements [Z40]**

When the destructive energy value of each test point of the light truck metric series tire is greater than or equal to the specified value in Table x1, it is judged "pass"; If the destructive energy value of a test point is less than the specified value in Table x1, then it is judged "fail".

When the destructive energy value of each test point of the light truck imperial series tire is greater than or equal to the specified value in Table x2, it is judged "pass"; If the destructive energy value of a test point is less than the specified value in Table x2, then it is judged "fail".

A point when plunger touches the rim without tyre being punctured or the minimum destructive energy being reached is deemed as reaching the minimum destructive energy.

**Table x1 The minimum destructive energy of light truck metric series tire**

Load index of single tire	Maximum load Corresponding Air pressure/ kPa	Minimum destructive energy/J	
		Nominal diameter of rim <13	Nominal diameter of rim ≥ 13
M121	≤ 250	136	294
	251-350	203	362
	351-450	271	514
	451-550	384	576
	551-650	—	644
	>650	—	712

**Table x2 The minimum destructive energy of light truck imperial series tire**

in Joule

Ply rating	Light truck tires		
	Nominal diameter of rim ≤12	Nominal diameter of rim 13-14	Nominal diameter of rim ≥15
4	136	192	294
6	203	271	362
8	271	384	514
10	339	514	576
12	407	—	644
14	—	—	712
16	—	—	768

3.14.2. Preparation of tyre

Mount the tyre on a model rim assembly and inflate it according to inflation pressure indicated on the Tyre (kPa) for maximum load as in 3.3.5

At the discretion of the Contracting Party, the inflation pressure may be the one defined as in 2.56 and provided by Tyre manufacturer to the Test Pressure. Indicated on the Tyre (kPa) pressure corresponding to the maximum load, or maximum dual load where there is both a single and dual load marked on the tyre. If the tyre is tubeless, a tube may be inserted to prevent loss of air during the test in the event of puncture.

Condition it at ambient room temperature for at least 3 hours and readjust the inflation pressure if necessary.

3.14.2.1 The test tires shall be mounted on the measuring rim specified in China Association for Standardization (CAS) and filled with the maximum rated load corresponding air pressure marked on the sidewall of the tire. If the single and twin-tiredual pressures are different, the twin-tiredual pressure shall be used for testing.

3.14.2.2 The laboratory temperature should be maintained at the range of 18°C ~ 36°C. The test tire and rim assembly shall be placed for at least 3h at laboratory temperature.

3.14.3. Test procedure

3.14.3.1. Force a 19.05 mm (0.75 inch) diameter cylindrical steel plunger with a hemispherical end perpendicularly into the tread rib as near to the centreline as possible, avoiding penetration into the tread pattern groove, at the rate of 50 mm (2 inches) per minute.

3.14.3.2. Record the force and penetration at five test points equally spaced around the circumference of the tyre. If the tyre fails to break before the plunger is stopped by reaching the rim, record the force and penetration as the rim is reached and use these values in paragraph 3.14.3.3. If the tyre fails to break before the plunger is stopped on reaching the rim, and the required minimum breaking energy is not achieved, then the tyre is deemed to have passed the test at that point

3.14.3.3. Compute the breaking energy for each test point by means of one of the two following formulas:

$$W = ((F P)/2) 10^{-3}$$

Where:

W = Energy, in Joules;

F = Force, in Newtons; and

P = Penetration, in mm;

or

$$W = ((F P)/2)$$

Where:

W = Energy, in inch-pounds;

F = Force, in pounds; and

P = Penetration, in inches.

3.14.3.4. Determine the breaking energy value for the tyre by computing the average of the five values obtained in accordance with paragraph 3.14.3.3.

3.14.3.1. The placed tire pressure shall be readjusted to the air pressure specified in 3.14.2.1. The test tire and rim assembly shall be fixed to the testing machine.

3.14.3.2. Tests shall be carried out at 5 points taken with approximately equal intervals along the center line of the tire tread.

3.14.3.3. The ram is perpendicular to the tread and is pressed against the pattern block near the circumferential center line of the tread, so as not to be pressed into the groove. The long cylindrical steel plunger diameter is  $19 \pm 0.5$  mm, with a hemispherical end.

3.14.3.4. The plunger shall exert applied force (F) to the crown of the tire at a moving speed of 50 mm/min  $\pm$  2.5 mm/min, until the tire crown is pierced or reached the minimum destructive energy value specified in Table 5x1 or 6x2. Correct the air pressure before proceeding to the next test.

53.314.23.5. The applied force (F) at each test point at the moment of stopping the movement of the plunger and the depth of penetration (P) shall be measured and recorded.

53.314.23.6. The testing point when plunger touches against rim but without piercing tire shall be deemed to have passed the test and noted in the test report with "contact against rim but without piercing tire".

53.314.23.7. The destructive energy of the points (except for the point of 53.314.23.6) shall be calculated in the formula of (1):

$$W = \frac{F \times P}{2\,000} \dots\dots\dots (1)$$

Where:

W — Destructive energy, in Joule (J);

F — Applied force, in Newton (N);

P — Displacement, in millimeters (mm).

53.314.23.8. When the automatic device in calculating destructive energy is used, after the specified minimum destructive energy is reached, the plunger shall be stopped immediately to continue to press into the tire.

53.314.23.9. If the tubeless tire can not maintain the air inflation pressure during the test, the inner tubes shall be installed for testing. But it shall be indicated in the test report.

3.15. Tubeless tyre bead unseating resistance test for LT/C tyres with rim codes of 10 or greater

China regulations have no requirements on this test.

3.15.1. Requirements

When a tubeless LT/C tyre is tested in accordance with the procedure described in this section, the applied force required to unseat the tyre bead at the point of contact shall be not less than:

- (a) 6670 N (1500 pounds) for tyres with a nominal section width of less than 160 mm (6 inches);
- (b) 8890 N (2000 pounds) for tyres with a nominal section width of 160 mm (6 inches) or more but less than 205 mm (8 inches);
- (c) 11120 N (2500 pounds) for tyres with a nominal section width of 205 mm (8 inches) or more.

3.15.2. Preparation of tyre-wheel assembly

3.15.2.1. Wash the tyre, dry it at the beads, and mount it without lubrication or adhesives on a clean, painted test rim.

3.15.2.2. Inflate it to the applicable pressure specified in the following table at ambient room temperature:

For LT/C tyres, the maximum permissible inflation pressure to be used for the bead unseating test is as follows:

Test Pressure Indicated on the Tyre (kPa)	Maximum permissible Bead Unseating test inflation pressure (kPa)
170-199	
200-299	190
300-399	260
400-499	340
500-599	410

[AR41]

<i>Load range</i>	<i>Test pressure</i>
Load range C	260 kPa
Load range D	340 kPa
	410 kPa

For LT/C tyres with a nominal cross section greater than 295 mm (11.5 inches), the maximum permissible inflation pressure to be used for the bead unseating test is as follows:


<i>Load range</i>	<i>Test pressure</i>
Load range C	190 kPa
Load range D	260 kPa

<i>Load range</i>	<i>Test pressure</i>
Load range E	340 kPa

- 3.15.2.3. Mount the wheel and tyre in a fixture shown in Figure 7, and force the bead unseating block shown in Figure 8 or Figure 9 against the tyre sidewall as required by the geometry of the fixture.

Figure 7

**Bead Unseating Fixture (all dimension in mm) and table of "A" dimensions**

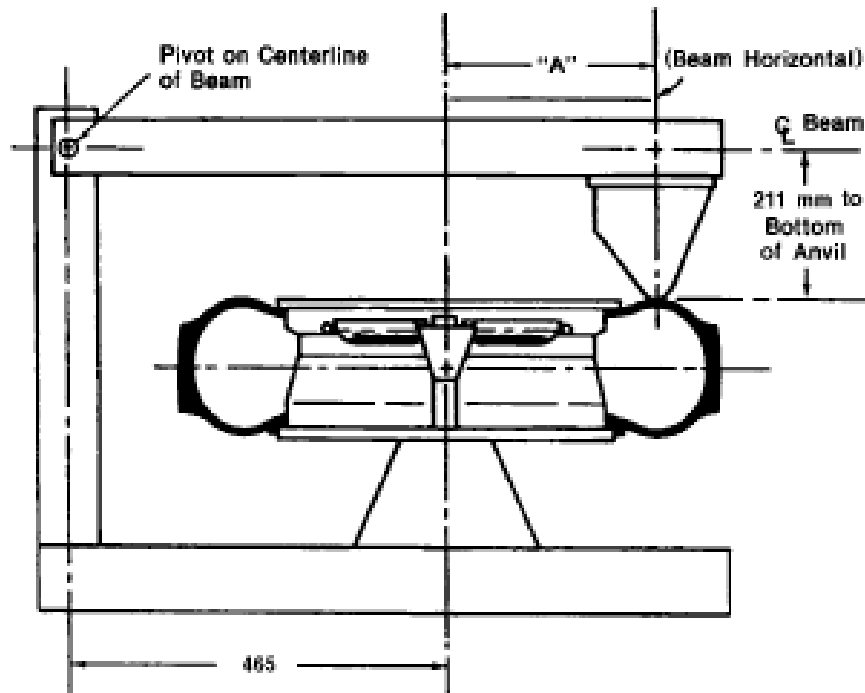


*Table of A dimension for different rim codes*

<i>Rim code</i>	<i>mm</i>	<i>Inches</i>
20	345	13.50
19	330	13.00
18	318	12.50
17	305	12.00
16	292	11.50
15	279	11.00
14	267	10.50
13	254	10.00
12	241	9.50
11	229	9.00
10	216	8.50
320	216	8.50
340	229	9.00
345	235	9.25


Table of A dimension for different rim codes		
Rim code	mm	Inches
365	248	9.75
370	254	10.00
390	279	11.00
415	292	11.50

Figure 8  
Diagram of bead unseating block (all dimensions in mm)

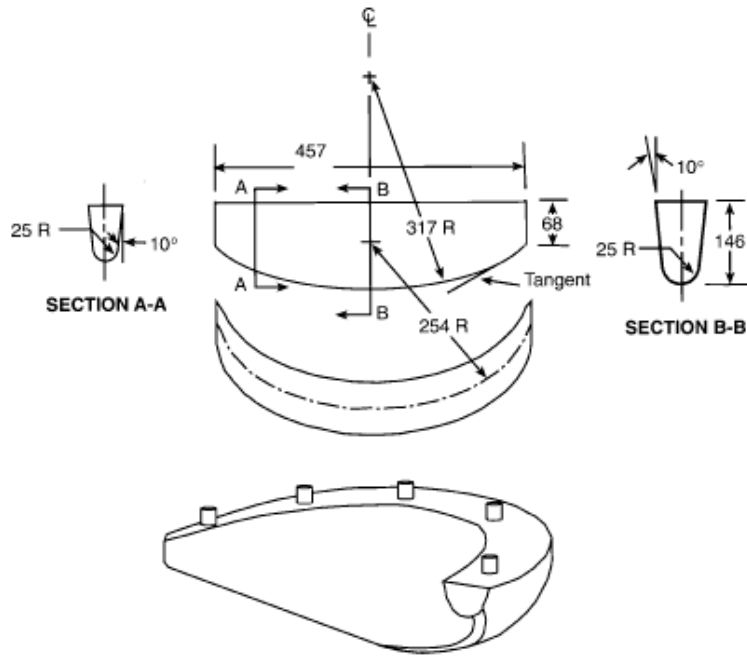

MATERIAL: Cast Aluminum 355  
T-6 Condition  
Finish-1.3 Micrometer (um)

Figure 9  
Diagram of bead unseating block (all dimensions in mm)

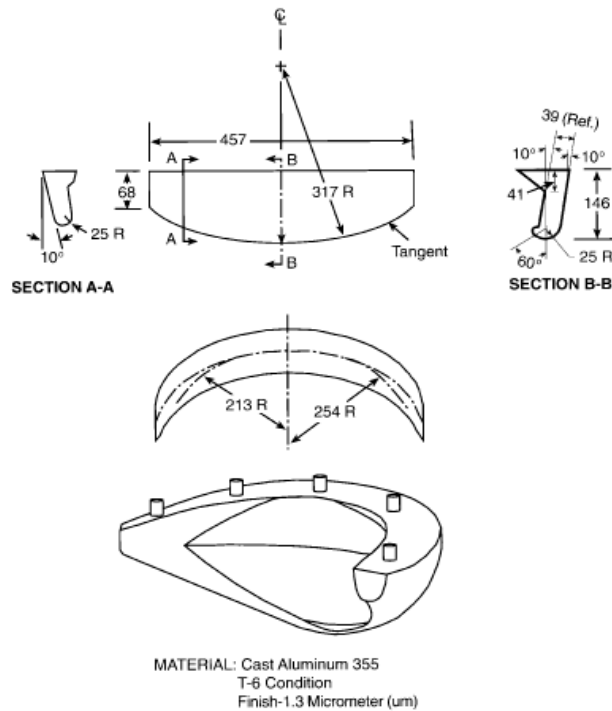

- 3.15.3. Test procedure
- 3.15.3.1. Apply a load through the block to the tyre's outer sidewall at the distance specified in Figure 8 for the applicable wheel size at a rate of 50 mm (2 inches) per minute, with the load arm substantially parallel to the tyre and rim assembly at the time of engagement.
- 3.15.3.2. Increase the load until the bead unseats or the applicable value specified in paragraph 3.15.1. is reached.
- 3.15.3.3. Repeat the test at least four places equally spaced around the tyre circumference.
- 3.15.3.4. Increase the load until the bead unseats or the applicable value specified in paragraph 3.15.1. is reached.
- 3.15.3.5. Repeat the test at least four places equally spaced around the tyre circumference.
- 3.16. Load/speed endurance test for LT/C tyres<sup>7</sup>[AR42]
- 3.16.1. Requirements
- 3.16.1.1. Each type of LT/C tyre shall undergo at least one load/speed endurance test carried out by the procedure described below.
- 3.16.1.2. A LT/C tyre which, after undergoing the endurance test, does not exhibit any tread separation, ply separation, cord separation, chunking or broken cords shall be deemed to have passed the test.

<sup>7</sup> From Regulation No. 54

- 3.16.1.3. The outer diameter of the tyre, measured six hours after the load/speed endurance test, shall not differ by more than  $\pm 3.5$  per cent from the outer diameter as measured before the test.
- 3.16.1.4. If the load/speed combination for the tyre is given in the table in Annex 5, the endurance test prescribed in paragraph 3.16. above need not be carried out for load and speed values other than the nominal values.
- 3.16.1.5. In the case of a tyre which has a load/speed combination in addition to the one that is subject to the variation of load with speed given in the table in Annex 5 to this Regulation, the endurance test prescribed in paragraph 3.16. above shall also be carried out on a second tyre of the same type at the additional load/speed combination.
- 3.16.2. Preparing the tyre
  - 3.16.2.1. Mount a new tyre on the test rim specified by the manufacturer.
  - 3.16.2.2. Use a new inner tube or combination of inner tube, valve and flap (as required) when testing tyres with inner tubes.
  - 3.16.2.3. Inflate the tyre to the pressure corresponding to the pressure index specified by the manufacturer.
  - 3.16.2.4. Condition the tyre-and-wheel assembly at test-room temperature for not less than three hours.
  - 3.16.2.5. Readjust the tyre pressure to that specified in paragraph 3.16.2.3. above.

~~3.16.3. Test procedure~~

- 3.16.3.1. Mount the tyre-and-wheel assembly on the test axle and press it against the outer face of a smooth power-driven test drum 1.70 m  $\pm$  1 per cent in diameter having a surface at least as wide as the tyre tread.
- 3.16.3.2. **Apply to the test axle a series of test loads expressed in per cent of the load indicated, in Annex 2 to this Regulation, opposite the load index engraved on the sidewall of the tyre, in accordance with the test programme below. Where the tyre has load-capacity indices for both single and twinned utilization, the reference load for single utilization shall be taken as the basis for the test loads.**<sup>[N43]</sup>

~~Apply to the test axle a series of test loads expressed in per cent of the load-carrying capacity of the tyre, in accordance with the test programme shown in paragraph 3.16.4.7. below. Where the tyre has load indices for both single and twinned utilization, the reference load for single utilization shall be taken as the basis for the test loads.~~

- 3.16.3.3. In the case of tyres with a speed symbol Q and above, test procedures are as specified in paragraph 3.16.4.
- 3.16.3.3.1. For all other tyre types, the endurance test programme is shown in paragraph 3.16.4.7.
- 3.16.3.4. The tyre pressure shall not be corrected throughout the test and the test load shall be kept constant throughout each of the three test stages.
- 3.16.3.5. During the test the temperature in the test-room shall be maintained at between 20 °C and 30 °C or at a higher temperature if the manufacturer so agrees.
- 3.16.3.6. The endurance-test programme shall be carried out without interruption.



- 3.16.4. Load/speed test programme for tyre with speed symbol Q and above
- 3.16.4.1. This programme applies to:
  - 3.16.4.1.1. All tyres marked with load index in single 121 or less.
  - 3.16.4.1.2. Tyres marked with load index in single 122 and above and with the additional marking "C", or "LT", referred to in paragraph 3.3.14. of this regulation.
- 3.16.4.2. Load placed on the wheel as a percentage of the load corresponding to the load index:
  - 3.16.4.2.1. 90 per cent when tested on a test drum 1.70 m ± 1 per cent in diameter;
  - 3.16.4.2.2. 92 per cent when tested on a test drum 2.0 m ± 1 per cent in diameter.
- 3.16.4.3. Initial test speed: speed corresponding to the speed symbol less 20 km/h;
  - 3.16.4.3.1. Time to reach the initial test speed: 10 min.
  - 3.16.4.3.2. Duration of the first step = 10 min.
- 3.16.4.4. Second test speed: speed corresponding to the speed symbol less 10 km/h;
  - 3.16.4.4.1. Duration of the second step = 10 min.
- 3.16.4.5. Final test speed: speed corresponding to the speed symbol:
  - 3.16.4.5.1. Duration of the final step = 30 min.
- 3.16.4.6. Total test duration: 1 h.
- 3.16.4.7. Endurance test programme [AR44]

Load index	Tyre speed category symbol	Test-drum speed Radial-ply <sup>†</sup> km.h <sup>-1</sup>	Load placed on the wheel as a percentage of the load corresponding to the load index		
			7 h.	16 h.	24 h.
122 or more	◆ F	◆ 32			
	◆ G	◆ 40	○	○	
	◆ J	◆ 48	○	○	○
	◆ K	◆ 56	○	○	○
	◆ L	◆ 64		○	○
	◆ M	◆ 72	66 %	84 %	101 %
121 or less	◆ F	◆ 32			
	◆ G	◆ 40			
	◆ J	◆ 48			
	◆ K	◆ 56	○	○	○
	○ L	64	70 %	88 %	106 %
	○	○	4 h.	6 h.	
	M	80	75 %	97 %	114 %
	N	88	75 %	97 %	114 %
P	96	75 %	97 %	114 %	

Special use tyres (marked "ET" or "ML" or "MPT") should be tested at a speed equal to 85 per cent of the speed prescribed for equivalent normal tyres.

**3.16. High-speed performance test (midget-and-light truck tires)**

**3.16.1. Requirements**

**3.16.1.1.** After the test is conducted under the conditions specified in this standard, the tire pressure shall not be lower than the specified initial air pressure; if the tire appearance (tire tread, sidewall, cord ply, inner liner, belted breaker and tire bead) has no defects such as delamination, ply cracking, cord separation, cord fracture, chunking, open splices, cracking and body shape distortion, then the result is “pass”; if not, “fail”.

**3.16.2. Preparing the tyre**

~~3.16.2.1. The appearance quality of the test tire shall comply with the provisions in GB 9744.~~

**3.16.2.12.** The test tire shall be mounted on a measuring rim conforming to China Association for Standardization (CAS) ~~GB/T 2977~~ and filled with the maximum rated load corresponding air pressure marked on the sidewall of the tire.

**3.16.2.23.** The inflated test tire and rim assembly shall be placed at a temperature of  $38^{\circ}\text{C}\pm 3^{\circ}\text{C}$  for at least 3h.

**3.16.2.34.** The speed of the test drum accelerating at a constant speed to the speed of the initial test shall be within 10 min.

**3.16.2.45.** The test conditions shall be in accordance with the requirements of Table x3. In Table x3, in addition to the Phase I test, the speed of the other test phases changed to a stable speed shall be within 1 min.

**3.16.2.56.** The test shall be continuously carried on, the tire test pressure shall not be adjusted and the test load shall be kept constant.

**3.16.2.67.** The ambient temperature shall be maintained within the range of  $38^{\circ}\text{C}\pm 3^{\circ}\text{C}$  throughout the test.

**3.16.3. Test procedure**

**3.16.3.1.** The pressure of the placed test tire shall be adjusted to the air pressure specified in 3.16.2.12.

**3.16.3.2.** The test tire and rim assembly prepared in accordance with the above conditions shall be fixed to the testing machine, be perpendicular to and exert test load to the outer surface of the test drum. The test load shall be 90% of the maximum load of the single tire.

**3.16.3.3.** The test shall be carried out continuously in accordance with the provisions of Table x3.

**3.16.3.4.** After the test is completed in accordance with the specified procedures, the test tire shall be allowed to cool naturally for 15min to 25min, the tire pressure shall be measured within a specified period of time, and after completely cooled the tire shall be unloaded for appearance inspection.

**Table x3 Tire high speed performance test procedure**

Test stage	Test speed/(km/h)	Test duration/min
------------	-------------------	-------------------

1	0 - Initial test speed a	10
2	Initial test speed	10
3	Initial test speed+10	10
4	Initial test speed+20	30
Initial test speed=The velocity of the velocity symbol: 20km/h.		

3.17. Endurance test for LT/C tyres<sup>8</sup>[AR45]

3.17.1. Requirements

3.17.1.1. When the tyre is tested in accordance with paragraph 3.17.3.:

- (a) There shall be no visual evidence of tread, sidewall, ply, cord, belt or bead separation, chunking, open splices, cracking or broken cords.
- (b) The tyre pressure, when measured at any time between 15 minutes and 25 minutes after the end of the test, shall not be less than 95 per cent of the initial pressure specified in paragraph 3.17.2.1.

3.17.2. Preparation of tyre

3.17.2.1. Mount the tyre on a test rim and inflate it to the pressure specified for the tyre in the following table:

<i>Light truck tyres with a nominal section width ≤ 295 mm (11.5 inches)</i>	
<i>Tyre application</i>	<i>Test pressure (kPa)</i>
Load range C	260
Load range D	340
Load range E	410
<i>Light truck tyres with a nominal section width &gt; 295 mm (11.5 inches)</i>	
Load range C	190
Load range D	260
Load range E	340

3.17.2.2. Condition the assembly at  $35 \pm 3$  °C for not less than 3 hours.

3.17.2.3. Readjust the pressure to the value specified in paragraph 3.17.2.1. immediately before testing.

3.17.3. Test procedure

3.17.3.1. Mount the assembly on a test axle and press it against the outer face of a smooth wheel having a diameter of  $1.70 \text{ m} \pm 1$  per cent.

3.17.3.2. During the test, the ambient temperature, at a distance of not less than 150 mm and not more than 1 m from the tyre, is maintained at  $35 \pm 3$  °C.

3.17.3.3. Conduct the test, without interruptions, at the test speed of not less than 120 km/h with loads and test periods not less than those shown in the

<sup>8</sup> From FMVSS 139

following table. For snow tyres for use in severe snow conditions and marked with the three-peaked mountain-snowflake symbol, conduct the test at not less than 110 km/h.

<i>Test period</i>	<i>Duration (hours)</i>	<i>Load as a percentage of tyre maximum load rating</i>
1	4	85
2	6	90
3	24	100

3.17.3.4. Throughout the test, the inflation pressure is not corrected and the test loads are maintained at the value corresponding to each test period, as shown in the table in paragraph 3.17.3.3.

3.17.3.5. Allow the tyre to cool for between 15 minutes and 25 minutes after running the tyre for the time specified in the table in paragraph 3.17.3.3., measure its inflation pressure. Inspect the tyre externally on the test rim for the conditions specified in paragraph 3.17.1.1.

### 3.17. Endurance test for LT/C tyres<sup>9</sup>[AR46]

#### 3.17.1. Requirements

3.17.1.1. After the test is conducted under the conditions specified in this standard, the tire pressure shall not be lower than the specified initial air pressure; if the tire appearance (tire tread, sidewall, cord ply, inner liner, belted breaker and tire bead) has no defects such as delamination, ply cracking, cord separation, cord fracture, chunking, open splices, cracking and body shape distortion, then the result is "pass"; if not "fail".

#### 3.17.2. Preparation of tyre

3.17.2.1. ~~The appearance quality of test tires shall comply with the provisions of GB 9744.~~

3.17.2.12. The tires shall be mounted on the measuring rim conforming to China Association for Standardization (CAS) specified in GB/T 2977 and filled with the maximum rated load air pressure marked on the sidewall of the tire (If two using conditions are regulated for the single and dual tire, the air pressure related to the maximum rated load of single tire shall be the standard).

3.17.2.23. The tire and rim assembly shall be placed at a temperature of  $38^{\circ}\text{C} \pm 3^{\circ}\text{C}$  for at least 3h.

3.17.2.34. The speed of the test drum accelerating at a constant speed to the speed of the initial test shall be within 5 min.

3.17.2.45. The durability test conditions of tires of various speed levels shall comply with the requirements of Table x4.

#### 3.17.3. Test procedure

3.17.3.1. The placed tire pressure shall be readjusted to the value specified in 3.17.2.12.

<sup>9</sup> From FMVSS 139

3.17.3.2. The tire and rim assembly prepared in accordance with above conditions shall be installed on the testing axle, loading perpendicular to the outer surface of test drum.

3.17.3.3. The ambient temperature shall be maintained within the range of 38°C ± 3°C throughout the test.

3.17.3.4. The test shall be carried out in accordance with the conditions specified in Table x4. The procedure shall be carried out continuously without being interrupted, the air pressure not being readjusted, the tire not being cooled manually and test load corresponding to various phases being constant.

3.17.3.5. After the test is completed in accordance with the specified procedures, the test tire shall be allowed to cool naturally for 15min to 25min, the tire pressure shall be measured within a specified period of time, and after completely cooled the tire shall be unloaded for appearance inspection.

Table x4 Conditions for durability test of light truck tires

Tire speed symbol <sup>a</sup>	Test speed/(km/h)		Percentage of maximum rated load of the tire /%		
	Radial tire	Diagonal tire	Duration		
			47h (Stage I)	16h (Stage II)	24h (Stage III)
<b>a) Maximum rated load of a single tire &lt;1500 kg</b>					
Z	80	65	75 <sup>b</sup>	95 <sup>b</sup>	115
P	100	—			
Q and above	120	—			
<b>b) Maximum rated load of a single tire &lt;1500 kg</b>					
S	35	35	65	85	100
T	45	35			
U	50	40			
V	55	45			
W	65	50			
X	70	—			
Y	80	—			
R	90	—			
<p>Note 1: The test of traction-type rib tire is conducted at 85% test speed of the normal tires.</p> <p>Note 2: Tires with a maximum rated load for a single tire &gt;1500 kg, maximum speed of 70 km/h and below shall be tested at 30 km/h.</p> <p>Note 3: Radial tires with a maximum rated load for a single tire &gt;1500 kg, maximum speed of 160 km/h and above shall be tested at 110 km/h.</p>					
<sup>a</sup> Please refer to Appendix 1c for the respective speed of different tire speed symbols.					
<sup>b</sup> The test time for the first and second phase are 4 h and 6 h respectively.					

3.18. Low inflation pressure performance test for LT/C tyres<sup>10</sup>

**China regulations have no requirements on this test.**

3.18.1. Requirements

3.18.1.1. When the tyre is tested in accordance with paragraph 3.18.3.:

- (a) There shall be no visual evidence of tread, sidewall, ply, cord, inner liner, belt or bead separation, chunking, open splices, cracking, or broken cords, and;
- (b) The tyre pressure, when measured at any time between 15 minutes and 25 minutes after the end of the test, shall not be less than 95 per cent of the initial pressure specified in paragraph 3.18.2.1.

3.18.2. Preparation of tyre

3.18.2.1. This test is conducted following completion of the tyre endurance test using the same tyre and rim assembly tested in accordance with paragraph 3.17. with the tyre deflated to the following appropriate pressure:

Pressure corresponding to the pressure index indicated on the Tyre (kPa)	Test Pressure (kPa)
200-299	150
300-399	200
400-499	260
500-599	320

<i>Light truck tyres with a nominal section width ≤ 295 mm (11.5 inches)</i>	
<i>Tyre application</i>	<i>◆ Test pressure (kPa)</i>
Load range C	◆ 200
Load range D	◆ 260
Load range E	◆ 320
<i>Light truck tyres with a nominal section width &gt; 295 mm (11.5 inches)</i>	

<sup>10</sup> From FMVSS 139

Load range C	◆—150
Load range D	◆—200
Load range E	◆—260

3.18.2.2. After the tyre is deflated to the appropriate test pressure in paragraph 3.18.2.1. at the completion of the endurance test, condition the assembly at  $35 \pm 3$  °C for not less than 2 hours.

- 3.18.2.3. Before or after mounting the assembly on a test axle, readjust the tyre pressure to that specified in paragraph 3.18.2.1.
- 3.18.3. Test procedure
- 3.18.3.1. The test is conducted for ninety minutes at the end of the test specified in paragraph 3.17., continuous and uninterrupted, at a speed of 120 km/h. For snow tyres for use in severe snow conditions and marked with the three-peaked mountain-snowflake symbol, conduct the test at not less than 110 km/h.
- 3.18.3.2. Press the assembly against the outer face of a test drum with a diameter of  $1.70 \text{ m} \pm 1$  per cent.
- 3.18.3.3. Apply to the test axle a load equal to 100 per cent of the tyre's maximum load carrying capacity.
- 3.18.3.4. Throughout the test, the inflation pressure is not corrected and the test load is maintained at the initial level.
- 3.18.3.5. During the test, the ambient temperature, at a distance of not less than 150 mm and not more than 1 m from the tyre, is maintained at  $35 \pm 3$  °C.
- 3.18.3.6. Allow the tyre to cool for between 15 minutes and 25 minutes. Measure its inflation pressure. Then, deflate the tyre, remove it from the test rim, and inspect it for the conditions specified in paragraph 3.18.1.1., subparagraph (a).
- 3.19. High speed performance test for LT/C tyres<sup>11</sup>
- 3.19.1. Requirements
- 3.19.1.1. When the tyre is tested in accordance with paragraph 3.19.3.:
- There shall be no visual evidence of tread, sidewall, ply, cord, inner liner, belt or bead separation, chunking, open splices, cracking, or broken cords.
  - The tyre pressure, when measured at any time between 15 minutes and 25 minutes after the end of the test, shall not be less than 95 per cent of the initial pressure specified in paragraph 3.19.2.1.
- 3.19.2. Preparation of tyre
- 3.19.2.1. Mount the tyre on a test rim and inflate it to the pressure specified for the tyre in the following table:

<sup>11</sup> From FMVSS 139

<i>Light truck tyres with a nominal section width ≤ 295 mm (11.5 inches)</i>	
<i>Tyre application</i>	<i>Test pressure (kPa)</i>
Load range C	320
Load range D	410
Load range E	500
<i>Light truck tyres with a nominal section width &gt; 295 mm (11.5 inches)</i>	
Load range C	230
Load range D	320
Load range E	410

- 3.19.2.2. Condition the assembly at 35 ± 3 °C for not less than 3 hours.
- 3.19.2.3. Before or after mounting the assembly on a test axle, readjust the tyre pressure to that specified in paragraph 3.19.2.1.
- 3.19.3. Test procedure
  - 3.19.3.1. Press the assembly against the outer face of a test drum with a diameter of 1.70 m ± 1 per cent.
  - 3.19.3.2. Apply to the test axle a load equal to 85 per cent of the tyre's maximum load carrying capacity.
  - 3.19.3.3. Break-in the tyre by running it for 2 hours at 80 km/h.
  - 3.19.3.4. Allow tyre to cool to 38 °C and readjust inflation pressure to applicable pressure in paragraph 3.19.2.1. immediately before the test.
  - 3.19.3.5. Throughout the test, the inflation pressure is not corrected and the test load is maintained at the value applied in paragraph 3.19.2.1.
  - 3.19.3.6. During the test, the ambient temperature, measured at a distance of not less than 150 mm and not more than 1 m from the tyre, is maintained at 35 ± 3 °C.
  - 3.19.3.7. The test is conducted, continuously and uninterrupted, for ninety minutes through three thirty-minute consecutive test stages at the following speeds: 140, 150, and 160 km/h.
  - 3.19.3.8. Allow the tyre to cool for between 15 minutes and 25 minutes. Measure its inflation pressure. Then, deflate the tyre, remove it from the test rim, and inspect it for the conditions specified in paragraph 3.19.1.1., subparagraph (a).

**3.20. Physical dimensions of L.T.C. tyres<sup>12</sup>**

**3.20.1. Requirement**

**3.20.1.1. The actual section width and overall width for each tyre measured in accordance with paragraph 3.20.3, shall not exceed the section width specified in one of the publications described in Annex 6 to this Regulation for its size designation and type by more than**

<sup>12</sup> From FMVSS 139



(a) For tyres with a maximum permissible inflation pressure of 32, 36, or 40 psi, 7 per cent, or

(b) For tyres with a maximum permissible inflation pressure of 240, 280, 300, 340 or 350 kPa, 7 per cent or 10 mm, whichever is larger.

### 3.20.2. Preparation of the tyre

3.20.2.1. Mount the tyre on the measuring rim specified by the tyre manufacturer or in one of the publications listed in Annex 7 to this Regulation.

3.20.2.2. Inflate the tyre to the pressure at maximum load as labelled on sidewall.

3.20.2.3. Condition the assembly at an ambient room temperature of 20 °C to 30 °C for not less than 24 hours.

3.20.2.4. Readjust the tyre pressure to that specified in paragraph 3.20.2.1.

### 3.20.3. Test procedure

3.20.3.1. Measure the section width and overall width by caliper at six points approximately equally spaced around the circumference of the tyre, avoiding measurement of the additional thickness of the special protective ribs or bands. The average of the measurements so obtained is taken as the section width and overall width, respectively.

3.20.3.2. Determine the outer diameter by measuring the maximum circumference of the tyre and dividing the figure so obtained by Pi (3.1416).

### 3.21. Physical dimensions of LT/C tyres<sup>13</sup>

#### 3.21.1. Requirements

##### 3.21.1.1. Section width of a tyre

3.21.1.1.1. The section width shall be obtained by means of the following formula:

$$S = S_1 + K(A - A_1)$$

Where:

$S$  is the "section width" expressed in millimetres and measured on the measuring rim;

$S_1$  is "the nominal section width" in millimetres, as shown on the sidewall of the tyre in the tyre designation as prescribed;

$A$  is the width of the measuring rim in millimetres, as shown by the manufacturer in the descriptive note; and

$A_1$  is the width of the theoretical rim in millimetres;

$A_1$  shall be taken to equal  $S_1$  multiplied by the factor  $x$  as specified by the manufacturer; and  $K$  shall be taken to equal 0.

3.21.1.1.2. However, for the existing types of tyres whose designation is given in the first column of the tables in Annex 6 to this regulation, the section width shall be deemed to be that given opposite the tyre designation in those tables.

##### 3.21.1.2. Outer diameter of a tyre

<sup>13</sup> From Regulation No. 54

3.21.1.2.1. The outer diameter of a tyre shall be obtained by means of the following formula:

$$D = d + 2H$$

Where:

D is the outer diameter expressed in millimetres;

d is the rim diameter, expressed in millimetres as shown in Annex 3;

H is the nominal section height in millimetres and is equal to  $S1 \times 0.01 \times Ra$ ;

S1 is the nominal section width in millimetres;

Ra is the nominal aspect ratio;

All as in the tyre designation shown on the sidewall of the tyre.

3.21.1.2.2. However, for the existing types of tyres whose designation is given in the first column of the tables in Annex 6 to this regulation, the outer diameter shall be deemed to be that given opposite the tyre designation in those tables.

3.21.1.3. Tyre section width specifications

3.21.1.3.1. The overall width of a tyre may be less than the section width or widths determined pursuant to paragraph 3.21.1.1, above.

3.21.1.3.2. It may exceed that value by 4 per cent. However, for tyres with nominal section width exceeding 305 mm intended for dual mounting (twinning), the value determined pursuant to paragraph 3.21.1.1, above shall not be exceeded by more than 2 per cent for tyres with nominal aspect ratio higher than 60.

3.21.1.4. Tyre outer diameter specifications

3.21.1.4.1. The outer diameter of a tyre shall not be outside the values  $D_{min}$  and  $D_{max}$  obtained from the following formulae:

$$D_{min} = d + (2H \cdot a)$$

$$D_{max} = d + (2H \cdot b)$$

3.21.1.4.2. For sizes listed in Annex 6 to this regulation the nominal section height H is equal to:

$$H = 0.5 (D - d) \quad \text{for references see paragraph 3.21.1.2.1}$$

3.21.1.4.2.1. For other sizes, not listed in Annex 6 to this regulation

"H" and "d" are as defined in paragraph 3.21.1.2.1.

3.21.1.4.2.2. Coefficients "a" and "b" are respectively:

3.21.1.4.2.2.1. Coefficient "a" = 0.97

3.21.1.4.2.2.2. Coefficient "b"

For normal use tyres = 1.04

For special use tyres = 1.06

3.21.1.4.2.2.3. For snow tyres the outer diameter ( $D_{max}$ ) established in conformity with the above may be exceeded by 1 per cent.

3.21.2. Test procedure

3.21.2.1. The tyre is mounted on the measuring rim specified by the manufacturer and inflated to the pressure corresponding to the pressure index specified by the manufacturer.

3.21.2.2. The tyre fitted on its rim is conditioned to the ambient temperature of the laboratory for at least 24 hours.

3.21.2.3. The pressure is readjusted to the value specified in paragraph 3.21.2.1. above.

3.21.2.4. The overall width is measured by caliper at six equally spaced points, account being taken of the thickness of the protective ribs or bands. The highest measurement so obtained is taken as the overall width.

3.21.2.5. The outer diameter is calculated from the maximum circumference.

3.20. (Physical dimensions of LT/C tyres<sup>[AR47]</sup> excluding High Flotation sizes)

<sup>[AR48]</sup>3.20.1 The following paragraphs describe in detail the requirements for determining the physical dimensions of LT/C tyres according to this regulation. The characteristics to be determined are the overall width, and the outside diameter. If these characteristics are within the specified tolerances, the physical dimensions of the tyre are acceptable.

3.20.2. Definitions (see paragraph 2. of this regulation for detailed definitions of various terms)

3.20.2.1. The overall width of the tyre is defined<sup>[N49]</sup> as the average of four measurements of its width at the widest point, including any markings or protective ribs.

3.20.2.1. There is no defined theoretical overall width of standard tyres. It is a measured characteristic, not a calculated one.

3.20.1. Requirements

3.20.3. Section width of a tyre<sup>[AR50]</sup>

The section width shall be obtained by means of the following formula:

$$S = S_1 + K (A - A_1)$$

Where:

S is the "section width" expressed in millimetres and measured on the measuring rim;<sup>[N51]</sup>

$S_1$  is "the nominal section width" in millimetres, as shown on the sidewall of the tyre in the tyre designation as prescribed;

$S_1$  is the nominal section width (in mm) as shown on the side wall of the tyre in the designation of the tyre as prescribed.

A is the width of the measuring rim in millimetres, as shown by the manufacturer in the descriptive notes.

$A$  is the width (expressed in mm) of the measuring rim, as declared by the manufacturer;

and

$A_1$  is the width of the theoretical rim in millimetres;

$A_2$  is the width (expressed in mm) of the theoretical rim.

$A_1$  shall be taken to equal  $S_1$  multiplied by the factor  $x$  as specified by the manufacturer, and  $K$  shall be taken to equal 0.4.

3.20.3.1 However, for the existing types of tyres whose designation is given in the first column of the tables in Annex 6 to this regulation, the section width shall be deemed to be that given opposite the tyre designation in those tables.

#### 3.20.4. Outer diameter of a tyre<sup>[AR52]</sup>

The outer diameter of a tyre shall be obtained by means of the following formula:

$$D = d + 2H$$

Where:

$D$  is the outer diameter expressed in millimetres;

$d$  is the rim diameter, expressed in millimetres as shown in Annex 3;

$d$  is the nominal rim diameter as defined in the Nominal rim diameter code table in Annex 3;

$H$  is the nominal section height in millimetres and is equal to  $S_1 \times 0.01 Ra$

$S_1$  is the nominal section width in millimetres;

$Ra$  is the nominal aspect ratio;

$H$  is the nominal section height rounded to the nearest millimetre and is equal to

$$H = S_1 \times 0.01 Ra, \text{ where}$$

$S_1$  is the nominal section width in millimetres;

$Ra$  is the nominal aspect ratio<sup>[AR53]</sup>.

All as in the tyre designation shown on the sidewall of the tyre.

3.20.4.1 However, for the existing types of tyres whose designation is given in the first column of the tables in Annex 6 to this regulation, the outer diameter shall be deemed to be that given opposite the tyre designation in those tables.

<sup>14</sup> When the conventional number is given by codes, the value in millimetres is obtained by multiplying the code number by 25.4.

### 3.20.2. Test procedure

3.20.2.1. The tyre is mounted on the measuring rim specified by the manufacturer and inflated to the pressure corresponding to the pressure index specified by the manufacturer.

3.20.2.2. The tyre fitted on its rim is conditioned to the ambient temperature of the laboratory for at least 24 hours.

3.20.2.3. The pressure is readjusted to the value specified in paragraph 3.20.2.1. above.

3.20.2.4. The overall width is measured by caliper at six equally spaced points, account being taken of the thickness of the protective ribs or bands. The highest measurement so obtained is taken as the overall width.

3.20.2.5. The outer diameter is calculated from the maximum circumference.

### 3.20.5. Physical dimensions measurement method

3.20.5.1. Mount the tyre on one of the approved rims mentioned in the appropriate Standards Manual and inflate it to the ~~pressure corresponding to the pressure index specified by the manufacturer~~ inflation pressure corresponding to the pressure in kPa or to the pressure index marked on the sidewall.[AR54]

3.20.5.3. Condition the tyre, mounted on its rim, at the ambient ~~room~~ temperature between 18 °C and 38 °C for not less than 24 hours.

3.20.5.4. Adjust the pressure to that specified ~~in the table below~~ defined in 3.20.5.1

3.20.5.5. The overall width is measured by caliper at six equally spaced points, account being taken of the thickness of the protective ribs or bands. The highest measurement so obtained is taken as the overall width.

3.20.5.5.1 Measure the overall width by caliper at six points approximately equally spaced around the circumference of the tyre ~~at four equally spaced points around the tyre, taking the thickness of protective ribs or bands into account~~. The reported value will be the **highest average** of the six measurements rounded to the nearest millimetre.[AR55]

3.20.5.6. The outer diameter is calculated from the maximum circumference measurement and dividing the figure so obtained by Pi (3.1416)[AR56]

3.20.5.7 Determine the height of the tread wear indicators by measuring the difference between the total depth of the tread pattern groove in the vicinity of the tread wear indicator and the depth to the top of the tread wear indicator. Repeat this measurement for at least one tread wear indicator in each row (minimum of 6 or 3, depending on the rim diameter; a row is the linear sequence of tread wear indicators

positioned radially across the tread from one side to the other). At least one tread wear indicator in each principal groove shall be measured (the principal grooves are the wide grooves positioned circumferentially around the tread). Record all of the individual values rounded to the nearest tenth of a millimetre.[AR57]

### 3.20.6 Physical dimension requirements

#### 3.20.6.1 Overall width

3.20.6.1.1. The overall width of a tyre may be less than the section width or widths determined pursuant to paragraph 3.20.3. above.

3.20.6.1.2.. It may exceed that value by 4 per cent . However, for tyres with nominal section width exceeding 305 mm intended for dual mounting (twinning), the value determined pursuant to paragraph 3.20.1.1. above shall not be exceeded by more than 2 per cent for tyres with nominal aspect ratio higher than 60.

#### 3.20.6.2. Outer diameter

3.20.6.2.1. The outer diameter of a tyre shall not be outside the values  $D_{min}$  and  $D_{max}$  obtained from the following formulae:

$$D_{min} = d + (2H \cdot a)$$

$$D_{max} = d + (2H \cdot b)$$

3.20.6.2.2. For sizes listed in Annex 6 to this regulation the nominal section height  $H$  is equal to:

$$H = 0.5 (D - d) \quad \text{for references see paragraph 3.20.1.2.1, 3.20.4}$$

3.20.6.2.3. For other sizes, not listed in Annex 6 to this regulation

" $H$ " and " $d$ " are as defined in paragraph 3.20.1.2.1, 3.20.4

Coefficients " $a$ " and " $b$ " are respectively:

$$\text{Coefficient "a"} = 0.97$$

Coefficient " $b$ "

$$\text{For normal use tyres, } b = 1.04$$

$$\text{For special use tyres, } b = 1.06$$

3.20.6.2.4. For snow tyres the outer diameter ( $D_{max}$ ) established in conformity with the above may be exceeded by 1 per cent.

### 3.2.X Measurements for High Flotation sizes

#### 3.20. The outer edge dimension of new LT/C tyres

##### 3.20.1 Measurement condition

3.20.1.1 The tyre shall park at room temperature for over 24h after vulcanization. Before inflation, place it at the temperature of 18°C - 36°C for at least 3h.

3.20.1.2 The tires without inner tube (outer tube) shall be mounted on the measuring rim for tires without inner tube and inflated as 3.20.1.3; the tires with inner tube (including outer tube, inner tube, and flap) shall be mounted on the measuring rim for tires with inner tube and inflated as 3.20.1.3.

3.20.1.3 The tyre shall be inflated to the air inflation pressure as regulated in standard (the single tube pressure shall be used in case there are single tube and dual tubes).

3.20.1.3 After inflate the tire to the required pressure, place it at the temperature of 18°C - 36°C for at least 24h. Conduct the air pressure measurement to the tyre after parking before measurement, and adjust to the regulated air pressure, and immediately confirm the inflation pressure of tyre 15 min after parking and conduct the measurement.

3.20.2 Measurement method

3.20.2.1 Outer perimeter of tyre

3.20.2.1.1 Measure the outer perimeter around the tyre for one cycle with metallic tape along the crown center line or close to the highest position of center line. The measuring value unit is mm, which shall round off to integer.

3.20.2.2 Width of tyre section

3.20.2.2.1 On the side of tire without marks, decorative rib, and kerbing rib, measure the section width at four points with same interval using vernier caliper or calliper (Fig.x1) in mm and round number. If it's inevitable to include marks, decorative rib, and kerbing rib, the additional thickness shall be subtracted from measured value.

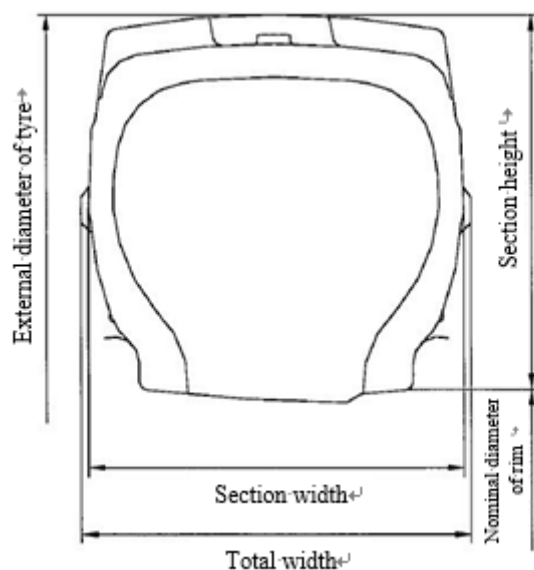


Figure x1 Schematic diagram of dimensional measurement of tire

3.20.3 Data calculation and processing

3.20.3.1 Outer diameter of tyre

3.20.3.1.1 Calculate the outer diameter of tire as per (x1):

$$D = \frac{L}{\pi} \dots (x1)$$

Where:

D — Outer diameter of tyre, in mm;

L — Outer circumference of tyre, in mm;

$\pi$  — Pi, 3.14.

The data of outer diameter of tyre shall round off to integer.

**3.20.3.2 Tyre section width**

**3.20.3.2.1** Width of tyre section is measured with arithmetic mean value in mm, rounded to the nearest integer.

**3.20.2 The outer edge dimension requirements of new tyres**

**3.20.2.1 The maximum and minimum overall width of new tyre**

The maximum overall width of new tyre = design section width of new tyre  $\times$  a

For diagonal tyre, a = 1.07

For radial tyre, a = 1.05

The minimum overall width of new tyre = design section width of new tyre  $\times$  0.96

**3.20.2.2 The maximum and minimum external diameter of new tyre**

The maximum external diameter of new tyre = 2  $\times$  design section height of new tyre  $\times$  b + nominal diameter of rim

For diagonal tyre, b = 1.07

For radial tyre, b = 1.03

The minimum external diameter of new tyre = 2  $\times$  design section height of new tyre  $\times$  0.97 + nominal diameter of rim

The maximum external diameter of new snow tyre, snow and mud tyre and special tyre could be increased with 1%.

**3.223.21. Tyre rolling resistance test**

**3.223.21.1. Requirements**

The following requirements does not apply to professional off-road tyres, tyres fitted with additional devices to improve traction properties (e.g. studded tyres), tyres with a speed rating less than 80 km/h (speed symbol F) and those having a nominal rim diameter code  $\leq$  10 (or  $\leq$  254 mm) or  $\geq$  25 (or  $\geq$  635 mm).

**3.223.21.1.1.** The maximum values for the rolling resistance coefficient shall not exceed the following (value in N/kN is equivalent to value in kg/tonne):

Tyre class	Max value (N/kN)
C1	10.5
C2	9.0
C3	6.5
For "snow tyre for use in severe snow conditions", the limits shall be increased by 1 N/kN.	



**3.223.21.2. Test Methods**

The alternative measurement methods listed below are given in this Regulation. The choice of an individual method is left to the tester. For each method, the test measurements shall be converted to a force acting at the tyre/drum interface. The measured parameters are:

- (a) In the force method: the reaction force measured or converted at the tyre spindle<sup>15</sup>;
- (b) In the torque method: the torque input measured at the test drum<sup>16</sup>;
- (c) In the deceleration method: the measurement of deceleration of the test drum and tyre assembly<sup>15</sup>;
- (d) In the power method: the measurement of the power input to the test drum<sup>15</sup>.

**3.223.21.3. Test Equipment****3.223.21.3.1. Drum specifications****3.223.21.3.1.1. Diameter**

The test dynamometer shall have a cylindrical flywheel (drum) with a diameter of at least 1.7 m.

The  $F_r$  and  $C_r$  values shall be expressed relative to a drum diameter of 2.0 m. If drum diameter different than 2.0 m is used, a correlation adjustment shall be made following the method in paragraph 3.223.21.7.3.

**3.223.21.3.1.2. Surface**

The surface of the drum shall be smooth steel. Alternatively, in order to improve skim test reading accuracy, a textured surface may also be used, which should be kept clean.

The  $F_r$  and  $C_r$  values shall be expressed relative to the "smooth" drum surface. If a textured drum surface is used, see Annex 8, paragraph 7.

**3.223.21.3.1.3. Width**

The width of the drum test surface shall exceed the width of the test tyre contact patch.

**3.223.21.3.2. Measuring rim (see Annex 9)**

The tyre shall be mounted on a steel or light alloy measuring rim, as follows:

- (a) For Class C1 tyres, the width of the rim shall be as defined in ISO 4000-1:2010;
- (b) For Class C2 and C3 tyres, the width of the rim shall be as defined in ISO 4209 1:2001.

<sup>15</sup> This measured value also includes the bearing and aerodynamic losses of the wheel and tyre which are also to be considered for further data interpretation.

<sup>16</sup> The measured value in the torque, deceleration and power methods also includes the bearing and aerodynamic losses of the wheel, the tyre, and the drum which are also to be considered for further data interpretation.

In cases where the width is not defined in the above mentioned ISO Standards, the rim width as defined by one of the standards organizations as specified in Annex 7 may be used."

**3.223.21.3.3.** Load, alignment, control and instrumentation accuracies

Measurement of these parameters shall be sufficiently accurate and precise to provide the required test data. The specific and respective values are shown in Annex 8.

**3.223.21.3.4.** Thermal environment

**3.223.21.3.4.1.** Reference conditions

The reference ambient temperature, measured at a distance not less than 0.15 m and not more than 1 m from the tyre sidewall, shall be 25 °C.

**3.223.21.3.4.2.** Alternative conditions

If the test ambient temperature is different from the reference ambient temperature, the rolling resistance measurement shall be corrected to the reference ambient temperature in accordance with paragraph 3.223.21.7.2. of this annex.

**3.223.21.3.4.3.** Drum surface temperature.

Care should be taken to ensure that the temperature of the test drum surface is the same as the ambient temperature at the beginning of the test.

**3.223.21.4.** Test Conditions

**3.223.21.4.1.** General

The test consists of a measurement of rolling resistance in which the tyre is inflated and the inflation pressure allowed to build up, i.e., "capped air".

**3.223.21.4.2.** Test speeds

The value shall be obtained at the appropriate drum speed specified in Table 2.

Table 2  
**Test Speeds (in km/h)**

<i>Tyre Class</i>	<i>C1</i>	<i>C2 and C3</i>	<i>C3</i>	
Load Index	All	LI ≤ 121	LI > 121	
Speed Symbol	All	All	J 100 km/h and lower or tyres not marked with speed symbol	K 110 km/h and higher
Speed	80	80	60	80

**3.223.21.4.3.** Test load

The standard test load shall be computed from the values shown in Table 3 and shall be kept within the tolerance specified in Annex 8.

**3.223.21.4.4.** Test inflation pressure

The inflation pressure shall be in accordance with that shown in Table 3 and shall be capped with the accuracy specified in paragraph 4. of Annex 8.

Table 3  
**Test Loads and Inflation Pressures**

Tyre Class	C1 <sup>(a)</sup>		C2, C3
	Standard Load	Extra Load	
Load- % of maximum load capacity	80	80	85 <sup>(b)</sup> (% of single load)
Inflation pressure kPa	210	250	Corresponding to maximum load capacity for single application <sup>(c)</sup>
<i>Note:</i> The inflation pressure shall be capped with the accuracy specified in paragraph 4 of Annex 8.			
<p><sup>(a)</sup> For those passenger car tyres belonging to categories which are not shown in ISO 4000-1:2010, the inflation pressure shall be the inflation pressure recommended by the tyre manufacturer, corresponding to the maximum tyre load capacity, reduced by 30 kPa.</p> <p><sup>(b)</sup> As a percentage of single load, or 85 per cent of maximum load capacity for single application specified in applicable tyre standards manuals if not marked on tyre.</p> <p><sup>(c)</sup> Inflation pressure marked on sidewall, or if not marked on sidewall, as specified in applicable tyre standards manuals corresponding to maximum load capacity for single application.</p>			

#### 3.223.21.4.5. Duration and speed.

When the deceleration method is selected, the following requirements apply:

- (a) The deceleration  $j$  shall be determined in differential  $d\omega/dt$  or discrete  $\Delta\omega/\Delta t$  form, where  $\omega$  is angular velocity,  $t$  – time;  
If the differential form  $d\omega/dt$  is used, then the recommendations of Annex 10 are to be applied.
- (b) For duration  $\Delta t$ , the time increments shall not exceed 0.5 s;
- (c) Any variation of the test drum speed shall not exceed 1 km/h within one time increment.

#### 3.223.21.5. Test Procedure

##### 3.223.21.5.1. General

The test procedure steps described below shall be followed in the sequence given.

##### 3.223.21.5.2. Thermal conditioning

The inflated tyre shall be placed in the thermal environment of the test location for a minimum of:

- (a) 3 hours for Class C1 tyres;
- (b) 6 hours for Class C2 and C3 tyres.

##### 3.223.21.5.3. Pressure adjustment

After thermal conditioning, the inflation pressure shall be adjusted to the test pressure, and verified 10 minutes after the adjustment is made.

##### 3.223.21.5.4. Warm-up

The warm-up durations shall be as specified in Table 4

Table 4  
Warm Up Durations


Tyre Class	C1	C2 and C3	C3	
		$LI \leq 121$	$LI > 121$	$LI > 121$
Nominal Rim Diameter	All	All	< 22.5	$\geq 22.5$
Warm up duration	30 min.	50 min.	150 min.	180 min.

3.223.21.5.5. Measurement and recording

The following shall be measured and recorded (see Figure 10):

- (a) Test speed  $U_n$ ;
- (b) Load on the tyre normal to the drum surface  $L_m$ ;
- (c) The initial test inflation pressure as defined in paragraph 3.223.21.4.3.;
- (d) The coefficient of rolling resistance measured  $C_r$ , and its corrected value  $C_{rc}$ , at 25 °C and for a drum diameter of 2 m;
- (e) The distance from the tyre axis to the drum outer surface under steady state  $r_L$ ;
- (f) Ambient temperature  $t_{amb}$ ;
- (g) Test drum radius  $R$ ;
- (h) Test method chosen;
- (i) Test rim (size and material);
- (j) Tyre size, manufacturer, type, identity number (if one exists), speed symbol, load index, **TIN**(Tire Identification Number [N58]), [AR59]

Figure 10

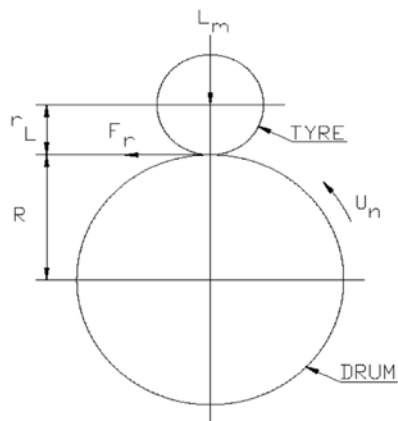

All the mechanical quantities (forces, torques) will be orientated in accordance with the axis systems specified in ISO 8855:1991.

The directional tyres shall be run in their specified rotation sense.

**3.223.21.5.6. Measurement of parasitic losses**

The parasitic losses shall be determined by one of the following procedures given in paragraph 3.223.21.5.6.1. or 3.223.21.5.6.2.

**3.223.21.5.6.1. Skim test reading**

Skim test reading follows the procedure below:

- (a) Reduce the load to maintain the tyre at the test speed without slippage<sup>17</sup>.

The load values should be as follows:

- (i) Class C1 tyres: recommended value of 100 N; not to exceed 200 N;
- (ii) Class C2 tyres: recommended value of 150 N; not to exceed 200 N for machines designed for Class C1 tyre measurement or 500 N for machine designed for Class C2 and C3 tyres;
- (iii) Class C3 tyres: recommended value of 400 N; not to exceed 500 N.
- (b) Record the spindle force  $F_t$ , input torque  $T_t$ , or the power, whichever applies<sup>16</sup>;
- (c) Record the load on the tyre normal to the drum surface  $L_m$ <sup>16</sup>.

**3.223.21.5.6.2. Deceleration method**

The deceleration method follows the procedure below:

- (a) Remove the tyre from the test surface;
- (b) Record the deceleration of the test drum  $\Delta\omega_{D0}/\Delta t$  and that of the unloaded tyre  $\Delta\omega_{T0}/\Delta t$ <sup>16</sup> or record the deceleration of the test drum  $j_{D0}$  and that of the unloaded tyre  $j_{T0}$  in exact or approximate form in accordance with paragraph 3.223.21.4.5.

**3.223.21.5.7. Allowance for machines exceeding  $\sigma_m$  criterion**

The steps described in paragraphs 3.223.21.5.3. to 3.223.21.5.5. shall be carried out once only, if the measurement standard deviation determined in accordance with paragraph 6.5. is:

- (a) Not greater than 0.075 N/kN for Class C1 and C2 tyres;
- (b) Not greater than 0.06 N/kN for Class C3 tyres.

If the measurement standard deviation exceeds this criterion, the measurement process will be repeated  $n$  times as described in paragraph 3.223.21.7.5. The rolling resistance value reported shall be the average of the  $n$  measurements.

**3.223.21.6. Data Interpretation**

<sup>17</sup> With the exception of the force method, the measured value includes the bearing and aerodynamic losses of the wheel, the tyre, and the drum losses which also need to be considered. It is known that the spindle and drum bearing frictions depend on the applied load. Consequently, it is different for the loaded system measurement and the skim test reading. However, for practical reasons, this difference can be disregarded.

**3.223.21.6.1.** Determination of parasitic losses**3.223.21.6.1.1.** General

The laboratory shall perform the measurements described in paragraph 3.223.21.5.6.1. for the force, torque and power methods or those described in paragraph 3.223.21.5.6.2. for the deceleration method, in order to determine precisely in the test conditions (load, speed, temperature) the tyre spindle friction, the tyre and wheel aerodynamic losses, the drum (and as appropriate, engine and/or clutch) bearing friction, and the drum aerodynamic losses.

The parasitic losses related to the tyre/drum interface  $F_{pl}$  expressed in newton shall be calculated from the force  $F_t$  torque, power or the deceleration, as shown in paragraphs 3.223.21.6.1.2. to 3.223.21.6.1.5. below.

**3.223.21.6.1.2.** Force method at tyre spindle

Calculate:  $F_{pl} = F_t (1 + r_L/R)$

Where:

$F_t$  is the tyre spindle force in newton (see paragraph 3.223.21.5.6.1.),

$r_L$  is the distance from the tyre axis to the drum outer surface under steady state conditions, in metre,

$R$  is the test drum radius, in meter.

**3.223.21.6.1.3.** Torque method at drum axis

Calculate:  $F_{pl} = T_t/R$

Where:

$T_t$  is the input torque in newton meter, as determined in paragraph 3.223.21.5.6.1.

$R$  is the test drum radius, in meter.

**3.223.21.6.1.4.** Power method at drum axis

Calculate:

$$F_{pl} = \frac{3.6 VA}{U_n}$$

Where:

$V$  is the electrical potential applied to the machine drive, in volt,

$A$  is the electric current drawn by the machine drive, in ampere,

$U_n$  is the test drum speed, in kilometre per hour.

**3.223.21.6.1.5.** Deceleration method

Calculate the parasitic losses  $F_{pl}$ , in newton.

$$F_{pl} = \frac{I_D}{R} \left( \frac{\Delta\omega_{D0}}{\Delta t_0} \right) + \frac{I_T}{R_r} \left( \frac{\Delta\omega_{T0}}{\Delta t_0} \right)$$

Where:

$I_D$	is the test drum inertia in rotation, in kilogram meter squared,
$R$	is the test drum surface radius, in meter,
$\omega_{D0}$	is the test drum angular speed, without tyre, in radians per second,
$\Delta t_0$	is the time increment chosen for the measurement of the parasitic losses without tyre, in second,
$I_T$	is the spindle, tyre and wheel inertia in rotation, in kilogram meter squared,
$R_r$	is the tyre rolling radius, in metre,
$\omega_{T0}$	is the tyre angular speed, unloaded tyre, in radian per second.
or	

$$F_{pl} = \frac{I_D}{R} j_{D0} + \frac{I_T}{R_r} j_{T0}$$

Where:

$I_D$	is the test drum inertia in rotation, in kilogram meter squared,
$R$	is the test drum surface radius, in meter,
$j_{D0}$	is the deceleration of the test drum, without tyre, in radians per second squared,
$I_T$	is the spindle, tyre and wheel inertia in rotation, in kilogram meter squared,
$R_r$	is the tyre rolling radius, in metre,
$j_{T0}$	is the deceleration of unloaded tyre, in radians per second squared."

### 3.223.21.6.2. Rolling resistance calculation

#### 3.223.21.6.2.1. General

The rolling resistance  $F_r$ , expressed in newton, is calculated using the values obtained by testing the tyre to the conditions specified in this section 3.7.3.1. and by subtracting the appropriate parasitic losses  $F_{pl}$ , obtained according to paragraph 3.223.21.6.1.

#### 3.223.21.6.2.2. Force method at tyre spindle

The rolling resistance  $F_r$ , in newton, is calculated using the equation

$$F_r = F_t[1 + (r_L/R)] - F_{pl}$$

Where:

$F_t$	is the tyre spindle force in newton,
$F_{pl}$	represents the parasitic losses as calculated in paragraph 3.223.21.6.1.2.,
$r_L$	is the distance from the tyre axis to the drum outer surface under steady-state conditions, in metre,
$R$	is the test drum radius, in metre.

#### 3.223.21.6.2.3. Torque method at drum axis

The rolling resistance  $F_r$ , in newton, is calculated with the equation

$$F_r = \frac{T_t}{R} - F_{pl}$$

Where:

- $T_t$  is the input torque, in newton metre,  
 $F_{pl}$  represents the parasitic losses as calculated in paragraph 3.223.21.6.1.3.,  
 $R$  is the test drum radius, in metre.

#### 3.223.21.6.2.4. Power method at drum axis

The rolling resistance  $F_r$ , in newton, is calculated with the equation:

$$F_r = \frac{3.6V \cdot A}{U_n} - F_{pl}$$

Where:

- $V$  = is the electrical potential applied to the machine drive, in volt,  
 $A$  = is the electric current drawn by the machine drive, in ampere,  
 $U_n$  = is the test drum speed, in kilometre per hour,  
 $F_{pl}$  = represents the parasitic losses as calculated in paragraph 3.223.21.6.1.4.

#### 3.223.21.6.2.5. Deceleration method

The rolling resistance  $F_r$ , in newton, is calculated using the equation:

$$F_r = \frac{I_D}{R} \left( \frac{\Delta\omega_V}{\Delta t_V} \right) + \frac{R I_T}{R_r^2} \left( \frac{\Delta\omega_V}{\Delta t_V} \right) - F_{pl}$$

Where:

- $I_D$  is the test drum inertia in rotation, in kilogram metre squared,  
 $R$  is the test drum surface radius, in meter,  
 $F_{pl}$  represents the parasitic losses as calculated in paragraph 3.223.21.6.1.5.,  
 $\Delta t_V$  is the time increment chosen for measurement, in second,  
 $\Delta\omega_V$  is the test drum angular speed increment, without tyre, in radian per second,  
 $I_T$  is the spindle, tyre and wheel inertia in rotation, in kilogram metre squared,  
 $R_r$  is the tyre rolling radius, in metre,  
 $F_r$  is the rolling resistance, in newton.

or



$$F_r = \frac{I_D}{R} j_v + \frac{R I_T}{R_r^2} j_v - F_{pl}$$

Where:

- $I_D$  is the test drum inertia in rotation, in kilogram metre squared,  
 $R$  is the test drum surface radius, in meter,  
 $F_{pl}$  represents the parasitic losses as calculated in paragraph 3.223.21.6.1.5.,  
 $j_v$  is the deceleration of the test drum, in radians per second squared,  
 $I_T$  is the spindle, tyre and wheel inertia in rotation, in kilogram metre squared,  
 $R_r$  is the tyre rolling radius, in metre,  
 $F_r$  is the rolling resistance, in newton."

### 3.223.21.7. Data Analysis

#### 3.223.21.7.1. Rolling resistance coefficient

The rolling resistance coefficient  $C_r$  is calculated by dividing the rolling resistance by the load on the tyre:

$$C_r = \frac{F_r}{L_m}$$

Where:

- $F_r$  is the rolling resistance, in newton,  
 $L_m$  is the test load, in kN.

#### 3.223.21.7.2. Temperature correction

If measurements at temperatures other than 25 °C are unavoidable (only temperatures not less than 20 °C or more than 30 °C are acceptable), then a correction for temperature shall be made using the following equation, with:

$F_{r25}$  is the rolling resistance at 25 °C, in Newton:

$$F_{r25} = F_r [1 + K(t_{amb} - 25)]$$

Where:

- $F_r$  is the rolling resistance, in Newton,  
 $t_{amb}$  is the ambient temperature, in degree Celsius,  
 $K$  is equal to:  
 0.008 for Class C1 tyres  
 0.010 for Class C2 and C3 tyres with a load index equal or lower than 121  
 0.006 for Class C3 tyres with a load index greater than 121"

**3.223.21.7.3.** Drum diameter correction

Test results obtained from different drum diameters shall be compared by using the following theoretical formula:

$$F_{r02} \cong KF_{r01}$$

with:

$$K = \sqrt{\frac{(R_1/R_2)(R_2 + r_T)}{(R_1 + r_T)}}$$

Where:

- $R_1$  is the radius of drum 1, in meter,  
 $R_2$  is the radius of drum 2, in meter,  
 $r_T$  is one-half of the nominal design tyre diameter, in meter,  
 $F_{r01}$  is the rolling resistance value measured on drum 1, in newton,  
 $F_{r02}$  is the rolling resistance value measured on drum 2, in newton.

**3.223.21.7.4.** Measurement result

Where n measurements are greater than 1, if required by paragraph 3.223.21.5.6., the measurement result shall be the average of the  $C_r$  values obtained for the n measurements, after the corrections described in paragraphs 3.223.21.7.2. and 3.223.21.7.3. have been made.

**3.223.21.7.5.** The laboratory shall ensure that, based on a minimum of three measurements, the machine maintains the following values of  $\sigma_m$ , as measured on a single tyre:

$\sigma_m \leq 0.075$  N/kN for tyres of Classes C1 and C2

$\sigma_m \leq 0.06$  N/kN for tyres of Class C3

If the above requirement for  $\sigma_m$  is not met, the following formula shall be applied to determine the minimum number of measurements n (rounded to the immediate superior integer value) that are required by the machine to qualify for conformance with this Regulation.

$$n = (\sigma_m / x)^2$$

Where:

$x = 0.075$  N/kN for tyres of Classes C1 and C2

$x = 0.06$  N/kN for tyres of Class C3

If a tyre needs to be measured several times, the tyre/wheel assembly shall be removed from the machine between the successive measurements.

If the removal/refitting operation duration is less than 10 minutes, the warm-up durations indicated in paragraph 3.223.21.5.3. may be reduced to:

- (a) 10 minutes for tyres of Class C1;
- (b) 20 minutes for tyres of Class C2;

(c) 30 minutes for tyres of Class C3.

**3.233.21.7.6.** Monitoring of the laboratory control tyre shall be carried out at intervals no greater than one month. Monitoring shall include a minimum of 3 separate measurements taken during this one month period. The average of the 3 measurements taken during a given one-month period shall be evaluated for drift from one monthly evaluation to another.

**3.233.22.** Snow performance test relative to snow tyre for use in severe snow conditions

In order to be classified as a "snow tyre for use in severe snow conditions" the tyre shall meet the performance requirements of paragraph **3.233.22.1**. The tyre shall meet these requirements based on a test method by which:

- (a) the mean fully developed deceleration ("mfdd") in a braking test;
- (b) or alternatively an average traction force in a **spin traction test**; [N60]
- (c) or alternatively the average acceleration in an acceleration test;

of the candidate tyre is compared to that of a standard reference tyre.

The relative performance shall be indicated by a snow index.

**3.233.22.1.** Tyre snow performance requirements

The following requirements does not apply to professional off-road tyres, tyres fitted with additional devices to improve traction properties (e.g. studded tyres), tyres with a speed rating less than 80 km/h (speed symbol F) and those having a nominal rim diameter code  $\leq 10$  (or  $\leq 254$  mm) or  $\geq 25$  (or  $\geq 635$  mm).

**3.233.22.1.1.** Class C1, C2 and C3 tyres

The minimum snow index value, as calculated in the procedure described in this paragraph for the different class of tyres, shall be as follows:

Class of tyre	Snow grip index (brake on snow method) <sup>(a)</sup>		Snow grip index (spin traction method) <sup>(b)</sup>	Snow grip index (acceleration method) <sup>(c)</sup>
	Ref. = C1 – SRTT 14	Ref. = C2 – SRTT 16C	Ref. = C1 – SRTT 14	Ref. = C3N – SRTT 19.5 Ref. = C3W – SRTT 22.5
C1	1.07	No	1.10	No
C2	No	1.02	1.10	No
C3	No	No	No	1.25

<sup>(a)</sup> See paragraph **3.233.22.3**.

<sup>(b)</sup> See paragraph **3.233.22.2**.

<sup>(c)</sup> See paragraph **3.233.22.4**.

**3.233.22.2.** Spin traction method for Classes C1 and C2 tyres (traction force test).

The test procedure of ASTM standard F1805-06 shall be used to assess snow performance through spin traction values on medium packed snow (The snow

compaction index measured with a CTI penetrometer<sup>18</sup> shall be between 70 and 80).

3.233.22.2.1. The test course surface shall be composed of a medium packed snow surface, as characterized in table A2.1 of ASTM standard F1805-06.

3.233.22.2.2. The tyre load for testing shall be as per option 2 in paragraph 11.9.2. of ASTM standard F1805-06.

3.233.22.3. Braking on snow method for Classes C1 and C2 tyres

3.233.22.3.1. General conditions

3.233.22.3.1.1. Test course

The braking tests shall be done on a flat test surface of sufficient length and width, with a maximum 2 per cent gradient, covered with packed snow.

The snow surface shall be composed of a hard packed snow base at least 3 cm thick and a surface layer of medium packed and prepared snow about 2 cm thick.

The air temperature, measured about one meter above the ground, shall be between -2 °C and -15 °C; the snow temperature, measured at a depth of about one centimetre, shall be between -4 °C and -15 °C.

It is recommended to avoid direct sunlight, large variations of sunlight or humidity, as well as wind.

The snow compaction index measured with a CTI penetrometer<sup>17</sup> shall be between 75 and 85.

3.233.22.3.1.2. Vehicle

The test shall be conducted with a standard production vehicle in good running order and equipped with an ABS system.

The vehicle used shall be such that the loads on each wheel are appropriate to the tyres being tested. Several different tyre sizes can be tested on the same vehicle.

3.233.22.3.1.3. Tyres

The tyres should be "broken-in" prior to testing to remove spew, compound nodules or flashes resulting from the moulding process. The tyre surface in contact with snow shall be cleaned before performing a test.

Tyres shall be conditioned at the outdoor ambient temperature at least two hours before their mounting for tests. Tyre pressures shall then be adjusted to the values specified for the test.

In case a vehicle cannot accommodate both the reference and candidate tyres, a third tyre ("control" tyre) may be used as an intermediate. First test control vs. reference on another vehicle, then test candidate vs. control on the vehicle.

3.233.22.3.1.4. Load and pressure:

---

<sup>18</sup> See appendix of ASTM standard F1805-06 for details.

3.233.22.3.1.4.1. For C1 tyres, the vehicle load shall be such that the resulting loads on the tyres are between 60 per cent and 90 per cent of the load corresponding to the tyre load index.

The cold inflation pressure shall be 240 kPa.

3.233.22.3.1.4.2. For C2 tyres, the vehicle load shall be such that the resulting loads on the tyres are between 60 per cent and 100 per cent of the load corresponding to the tyre load index.

The static tyre load on the same axle should not differ by more than 10 per cent.

The inflation pressure is calculated to run at constant deflection:

For a vertical load higher or equal to 75 per cent of the load capacity of the tyre, a constant deflection is applied, hence the test inflation pressure "Pt" shall be calculated as follows:

$$P_t = P_r \left( \frac{Q_t}{Q_r} \right)^{1.25}$$

Qr is the maximum load associated to the load index of the tyre written on the sidewall

Pr is the reference pressure corresponding to the maximum load capacity Qr

Qt is the static test load of the tyre

For a vertical load lower than 75 per cent of the load capacity of the tyre, a constant inflation pressure is applied, hence the test inflation pressure Pt shall be calculated as follows:

$$P_t = P_r (0.75)^{1.25} = (0.7)P_r$$

Pr is the reference pressure corresponding to the maximum load capacity Qr

Check the tyre pressure just prior to testing at ambient temperature."

3.233.22.3.1.5. Instrumentation

The vehicle shall be fitted with calibrated sensors suitable for measurements in winter. There shall be a data acquisition system to store measurements.

The accuracy of measurement sensors and systems shall be such that the relative uncertainty of the measured or computed mean fully developed decelerations is less than 1 per cent.

3.233.22.3.2. Testing sequences

3.233.22.3.2.1. For every candidate tyre and the standard reference tyre, ABS-braking test runs shall be repeated a minimum of 6 times.

The zones where ABS-braking is fully applied shall not overlap.

When a new set of tyres is tested, the runs are performed after shifting aside the vehicle trajectory in order not to brake on the tracks of the previous tyre.

When it is no longer possible not to overlap full ABS-braking zones, the test course shall be re-groomed.

Required sequence:

6 repeats SRTT, then shift aside to test next tyre on fresh surface

6 repeats Candidate 1, then shift aside

6 repeats Candidate 2, then shift aside

6 repeats SRTT, then shift aside

**3.233.22.3.2.2.** Order of testing:

If only one candidate tyre is to be evaluated, the order of testing shall be:

$$R1 - T - R2$$

Where:

R1 is the initial test of the SRTT, R2 is the repeat test of the SRTT and T is the test of the candidate tyre to be evaluated.

A maximum of two candidate tyres may be tested before repeating the SRTT test, for example:

$$R1 - T1 - T2 - R2.$$

**3.233.22.3.2.3.** The comparative tests of SRTT and candidate tyres shall be repeated on two different days.

**3.233.22.3.3.** Test procedure

**3.233.22.3.3.1.** Drive the vehicle at a speed not lower than 28 km/h.

**3.233.22.3.3.2.** When the measuring zone has been reached, the vehicle gear is set into neutral, the brake pedal is depressed sharply by a constant force sufficient to cause operation of the ABS on all wheels of the vehicle and to result in stable deceleration of the vehicle and held down until the speed is lower than 8 km/h.

**3.233.22.3.3.3.** The mean fully developed deceleration between 25 km/h and 10 km/h shall be computed from time, distance, speed, or acceleration measurements.

**3.233.22.3.4.** Data evaluation and presentation of results

**3.233.22.3.4.1.** Parameters to be reported

**3.233.22.3.4.1.1.** For each tyre and each braking test, the mean and standard deviation of the mfdd shall be computed and reported.

The coefficient of variation CV of a tyre braking test shall be computed as:

$$CV(\text{tyre}) = \frac{Std.dev(\text{tyre})}{Mean(\text{tyre})}$$

**3.233.22.3.4.1.2.** Weighted averages of two successive tests of the SRTT shall be computed taking into account the number of candidate tyres in between:

In the case of the order of testing R1 - T - R2, the weighted average of the SRTT to be used in the comparison of the performance of the candidate tyre shall be taken to be:

$$wa(\text{SRTT}) = (R1 + R2)/2$$

Where:

R1 is the mean mfdd for the first test of the SRTT and R2 is the mean

mfdd for the second test of the SRTT.

In the case of the order of testing R1 – T1 – T2 – R2, the weighted average (wa) of the SRTT to be used in the comparison of the performance of the candidate tyre shall be taken to be:

wa (SRTT) = 2/3 R1 + 1/3 R2 for comparison with the candidate tyre T1; and:

wa (SRTT) = 1/3 R1 + 2/3 R2 for comparison with the candidate tyre T2.

**3.233.22.3.4.1.3.** The snow grip index (SG) of a candidate tyre shall be computed as:

$$\text{Snow Grip Index (candidate)} = \frac{\text{Mean (candidate)}}{\text{wa (SRTT)}}$$

**3.233.22.3.4.2.** Statistical validations

The sets of repeats of measured or computed mfdd for each tyre should be examined for normality, drift, eventual outliers.

The consistency of the means and standard-deviations of successive braking tests of SRTT should be examined.

The means of two successive SRTT braking tests shall not differ by more than 5 per cent.

The coefficient of variation of any braking test shall be less than 6 per cent.

If those conditions are not met, tests shall be performed again after re-grooming the test course.

**3.233.22.3.4.3.** In the case where the candidate tyres cannot be fitted to the same vehicle as the SRTT, for example, due to tyre size, inability to achieve required loading and so on, comparison shall be made using intermediate tyres, hereinafter referred to as "control tyres", and two different vehicles. One vehicle shall be capable of being fitted with the SRTT and the control tyre and the other vehicle shall be capable of being fitted with the control tyre and the candidate tyre.

**3.233.22.3.4.3.1** The snow grip index of the control tyre relative to the SRTT (SG1) and of the candidate tyre relative to the control tyre (SG2) shall be established using the procedure in paragraphs **3.233.22.3.1.** to **3.233.22.3.4.2.**

The snow grip index of the candidate tyre relative to the SRTT shall be the product of the two resulting snow grip indices that is SG1 x SG2.

**3.233.22.3.4.3.2.** The ambient conditions shall be comparable. All tests shall be completed within the same day.

**3.233.22.3.4.3.3.** The same set of control tyres shall be used for comparison with the SRTT and with the candidate tyre and shall be fitted in the same wheel positions.

**3.233.22.3.4.3.4.** Control tyres that have been used for testing shall subsequently be stored under the same conditions as required for the SRTT.

**3.233.22.3.4.3.5.** The SRTT and control tyres shall be discarded if there is irregular wear or damage or when the performance appears to have been deteriorated."

**3.233.22.4.** Acceleration method for Class C3 tyres

3.233.22.4.1. According to the definition of C3 tyres reported into paragraph 3.233.22.3.4.3., the additional classification for the purpose of this test method only applies:

- (a) C3 Narrow (C3N), when the C3 tyre Nominal Section Width is lower than 285 mm;
- (b) C3Wide (C3W), when the C3 tyre Nominal Section Width is greater or equal to 285 mm.

3.233.22.4.2. Methods for measuring Snow Grip Index

Snow performance is based on a test method by which the average acceleration in an acceleration test, of a candidate tyre is compared to that of a standard reference tyre.

The relative performance shall be indicated by a Snow Grip Index (SG).

When tested in accordance with the acceleration test in paragraph 3.233.22.4.7., the average acceleration of a candidate snow tyre shall be at least 1.25 compared to one of the two equivalent SRTTs – ASTM F 2870 and ASTM F 2871.

3.233.22.4.3. Measuring equipment

3.233.22.4.3.1. A sensor suitable for measuring speed and distance covered on snow/ice surface between two speeds must be used.

To measure vehicle speed, a fifth wheel or non-contact speed-measuring system (including radar, GPS ...) shall be used.

3.233.22.4.3.2. The following tolerances shall be respected:

- (a) For speed measurements :  $\pm 1$  per cent (km/h) or 0.5 km/h whichever is greater.
- (b) For distance measurements:  $\pm 1 \times 10^{-1}$  m

3.233.22.4.3.3. A display of the measured speed or the difference between the measured speed and the reference speed for the test is recommended inside the vehicle so that the driver can adjust the speed of the vehicle.

3.233.22.4.3.4. For Acceleration test covered in paragraph 3.233.22.4.7., a display of the slip ratio of the driven tyres is recommended inside the vehicle and shall be used in the particular case of paragraph 3.233.22.5.7.2.1.1.

The slip ratio is calculated by

$$\text{Slip Ratio \%} = \left[ \frac{\text{Wheel Speed} - \text{Vehicle Speed}}{\text{Vehicle Speed}} \right] \times 100$$

- (a) Vehicle speed is measured as defined in 3.233.22.4.3.1 (m/s)
- (b) Wheel speed is calculated on a tyre of the driven axle by measuring its angular velocity and its loaded diameter

$$\text{Wheel Speed} = \pi \times \text{loaded diameter} \times \text{angular speed}$$

Where,  $\pi = 3.1416$  (m/360deg), the loaded diameter (m) and the angular speed (revolution per second = 360 deg/sec).

3.233.22.4.3.5. A data acquisition system can be used for storing the measurements.



#### 3.233.22.4.4. General conditions

##### 3.233.22.4.4.1. Test course

The test shall be done on a flat test surface of sufficient length and width, with a maximum 2 per cent gradient, covered with packed snow.

3.233.22.4.4.1.1. The snow surface shall be composed of a hard packed snow base at least 3 cm thick and a surface layer of medium packed and prepared snow about 2 cm thick.

3.233.22.4.4.1.2. The snow compaction index measured with a CTI penetrometer shall be between 80 and 90. Refer to the appendix of ASTM F1805 for additional details on measuring method.

3.233.22.4.4.1.3. The air temperature, measured about one meter above the ground, shall be between -2 °C and -15 °C; the snow temperature, measured at a depth of about one centimetre, shall be between -4 °C and -15 °C.

Air temperature shall not vary more than 10 deg C during the test.

##### 3.233.22.4.5. Tyres preparation and break-in

3.233.22.4.5.1. Fit the test tyres on rims as per ISO 4209-1 using conventional mounting methods. Ensure proper bead seating by the use of a suitable lubricant. Excessive use of lubricant should be avoided to prevent slipping of the tyre on the wheel rim.

3.233.22.4.5.2. The tyres should be "broken-in" prior to testing to remove spew, compound nodules or flashes resulting from moulding process.

3.233.22.4.5.3. Tyres shall be conditioned at the outdoor ambient temperature at least two hours before their mounting for tests.

They should be placed such that they all have the same ambient temperature prior to testing and be shielded from the sun to avoid excessive heating by solar radiation.

The tyre surface in contact with snow shall be cleaned before performing a test.

Tyre pressures shall then be adjusted to the values specified for the test.

##### 3.233.22.4.6. Testing sequence

If only one candidate tyre is to be evaluated, the order of testing shall be:

R1, T, R2

where:

R1 is the initial test of the SRTT, R2 is the repeat test of the SRTT and T is the test of the candidate tyre to be evaluated.

A maximum of 3 candidate tyres may be tested before repeating the SRTT test, for example: R1, T1, T2, T3, R2.

Recommendations are that the zones where acceleration is fully applied shall not overlap without reworking and when a new set of tyres is tested.

The runs are performed after shifting the vehicle trajectory in order not to accelerate on the tracks of the previous tyre; when it is no longer possible not to overlap full acceleration zones, the test course should be re-groomed.

**3.233.22.4.7.** Acceleration on Snow Test Procedure for Snow Grip Index of Class C3N and C3W

**3.233.22.4.7.1.** Principle

The test method covers a procedure for measuring the Snow Grip performance of commercial vehicle tyres during acceleration, using a commercial vehicle having a Traction Control System (TCS, ASR, etc.).

Starting with a defined initial speed, the full throttle is applied to activate the Traction Control system, the Average acceleration is calculated between two defined speeds.

**3.233.22.4.7.2.** Vehicle

**3.233.22.4.7.2.1.** The test shall be conducted with a standard 2 axle commercial vehicle in good running order with:

- (a) Low rear axle weight and an engine powerful enough to maintain the average percentage of slip during the test as required in paragraphs **3.233.22.4.7.5.1.** and **3.233.22.4.7.5.2.1.** below;
- (b) A manual gearbox (automatic gearbox with manual shift allowed) having a gear ratio covering the speed range of at least 19 km/h between 4 km/h and 30 km/h;
- (c) Differential lock on driven axle is recommended to improve repeatability;
- (d) A standard commercial system controlling/limiting the slip of the driving axle during acceleration (Traction Control, ASR, TCS, etc.)."

**3.233.22.4.7.2.1.1.** In the particular case where a standard commercial vehicle equipped with a traction control system is not available, a vehicle without Traction Control/ASR/TCS is permitted provided the vehicle is fitted with a system to display the percentage slip as stated in paragraph **3.233.22.4.3.4.** of this annex and a mandatory differential lock on the driven axle used in accordance with operating procedure **4.7.4.2.1.** below. If a differential lock is available it shall be used; if the differential lock, however, is not available, the average slip ratio should be measured on the left and right driven wheel.

**3.233.22.4.7.2.2.** The permitted modifications are:

- (a) Those allowing to increase the number of tyre sizes capable to be mounted on the vehicle;
- (b) Those permitting to install an automatic activation of the acceleration and the measurements.

Any other modification of the acceleration system is prohibited.

**3.233.22.4.7.3.** Vehicle fitting

The rear driven axle may be indifferently fitted with 2 or 4 test tyres if respecting the loading by tyre.

The front steer non driven axle is equipped with 2 tyres having a size suitable for the axle load. These 2 front tyres could be maintained along the test.

**3.233.22.4.7.4.** Load and inflation pressure

**3-233.22.4.7.4.1.** The static load on each rear driven test tyres must be between 20 per cent and 55 per cent of the tested tyre load capacity written on the sidewall.

The vehicle front steer total static axle load should be between 60 per cent and 160 per cent of the driven rear total axle load.

The static tyre load on the same driven axle should not differ by more than 10 per cent.

**3-233.22.4.7.4.2.** The driven tyres inflation pressure shall be 70 per cent of the one written on the sidewall.

The steer tyres are inflated at nominal sidewall pressure.

If the pressure is not marked on the sidewall, refer to the specified pressure in applicable tyre standards manuals corresponding to maximum load capacity.

**3-233.22.4.7.5.** Testing Runs

**3-233.22.4.7.5.1.** Mount first the set of reference tyres on the vehicle and when on the testing area.

Drive the vehicle at a constant speed between 4 km/h and 11 km/h and the gear ratio capable of covering the speed range of at least 19 km/h for the complete test programme (e.g. R-T1-T2-T3-R).

The Recommended Gear ratio selected is 3rd or 4th and shall give a minimum 10 percent average slip ratio in the measured range of speed.

**3-233.22.4.7.5.2.** In case of Traction Control system equipped vehicles (already switched "on" before the run) apply full throttle until the vehicle has reached the final speed:

Final speed = Initial speed + 15 km/h

No rearward restraining force shall be applied to the test vehicle.

**3-233.22.4.7.5.2.1.** In the particular case of paragraph **3-233.22.4.7.2.1.1.** of this annex where a standard commercial vehicle equipped with a Traction Control system is not available, the driver shall manually maintain the average slip ratio between 10 and 40 per cent (Controlled Slip procedure in place of the Full Slip) within the prescribed range of speeds. If a differential lock is not available, the averaged slip ratio difference between the left and right driven wheel shall not be higher than 8 per cent for each run. All the tyres and runs in the test session are performed with Controlled Slip procedure.

**3-233.22.4.7.5.3.** Measure the distance between the initial speed and the final speed.

**3-233.22.4.7.5.4.** For every candidate tyre and the standard reference tyre, the acceleration test runs shall be repeated a minimum of 6 times and the coefficients of variation (standard deviation/average\*100) calculated for minimum 6 valid runs on the distance shall be lower than or equal to 6 per cent.

**3-233.22.4.7.5.5.** In case of Traction Control System equipped vehicle, the Average Slip ratio shall be in the range from 10 per cent to 40 per cent (calculated as per paragraph **3-233.22.4.3.4.**).

**3-233.22.4.7.5.6.** Apply testing sequence as defined in paragraph **3-233.22.4.6.**

**3-233.22.4.8.** Processing of measurement results

**3-233.22.4.8.1.** Calculation of the Average Acceleration AA

Each time the measurement is repeated, the average acceleration AA (m · s<sup>-2</sup>) is calculated by:

$$AA = \frac{S_f^2 - S_i^2}{2D}$$

Where D [m] is the distance covered between the initial speed S<sub>i</sub> [m.s<sup>-1</sup>] and the final speed S<sub>f</sub> [m.s<sup>-1</sup>].

3.233.22.4.8.2. Validation of results

For the candidate tyres:

The coefficients of variation of the Average Acceleration is calculated for all the candidate tyres. If one coefficient of variation is greater than 6 per cent, discard the data for this candidate tyre and repeat the test.

$$\text{coefficient of variation} = \frac{\text{stdev}}{\text{average}} \times 100$$

For the reference tyre:

If the coefficient of variation of the average Acceleration "AA" for each group of min 6 runs of the reference tyre is higher than 6 per cent, discard all data and repeat the test for all tyres (the candidate tyres and the reference tyre).

In addition and in order to take in account possible test evolution, the coefficient of validation is calculated on the basis of the average values of any two consecutive groups of min 6 runs of the reference tyre. If the coefficient of validation is greater than 6 per cent, discard the data for all the candidate tyres and repeat the test.

$$\text{coefficient of validation} = \left| \frac{\text{Average2} - \text{Average1}}{\text{Average1}} \right| \times 100$$

3.233.22.4.8.3. Calculation of the "average AA"

If R1 is the average of the "AA" values in the first test of the reference tyre, R2 is the average of the "AA" values in the second test of the reference tyre, the following operations are performed, according to Table 5:

Table 5

<i>If the number of sets of candidate tyres between two successive runs of the reference tyre is:</i>	<i>and the set of candidate tyres to be qualified is:</i>	<i>then "Ra" is calculated by applying the following:</i>
1   R - T1 - R	T1	Ra = 1/2 (R1 + R2)
2   R - T1 - T2 - R	T1	Ra = 2/3 R1 + 1/3 R2
	T2	Ra = 1/3 R1 + 2/3 R2
3   R - T1 - T2 - T3 - R	T1	Ra = 3/4 R1 + 1/4 R2
	T2	Ra = 1/2 (R1 + R2)
	T3	Ra = 1/4 R1 + 3/4 R2

"Ta" (a = 1, 2, ...) is the average of the AA values for a test of a candidate tyre.

#### 3.233.22.4.8.4. "AFC" Calculation (Acceleration Force Coefficient)

Also called AFC Acceleration Force Coefficient

Calculation on of AFC(T) and AFC(R) as defined in Table 6 :

Table 6

	<i>The Acceleration Force Coefficient "AFC" is:</i>
Reference tyre	$AFC(R) = \frac{Ra}{g}$
Candidate tyre	$AFC(T) = \frac{Ta}{g}$

Ra and Ta are in m/s<sup>2</sup>

"g"= gravity acceleration (rounded to 9.81 m/s<sup>2</sup>)

#### 3.233.22.4.8.5. Calculation of the relative Snow Grip Index of the tyre

The Snow grip index represents the relative performance of the candidate tyre compared to the reference tyre:

$$\text{Snow Grip Index} = \frac{AFC(T)}{AFC(R)}$$

#### 3.233.22.4.8.6. Calculation of the Slip Ratio

The slip ratio can be calculated as the average of Slip ratio as mentioned in paragraph 3.233.22.4.3.4. of this annex or by comparing the average distance referred to in paragraph 3.233.22.4.7.5.3. of this annex of the minimum 6 runs to the distance of a run done without slip (very low acceleration)

$$\text{Slip Ratio \%} = \left[ \frac{\text{Average distance} - \text{No slip distance}}{\text{No slip distance}} \right] \times 100$$

No slip distance means the wheel distance calculated on a run done with a constant speed or a continuous low acceleration.

#### 3.233.22.4.9. Snow grip performance comparison between a candidate tyre and a reference tyre using a control tyre

##### 3.233.22.4.9.1. Scope

When the candidate tyre size is significantly different from the reference tyre a direct comparison on the same vehicle may be not possible. This is an approach using an intermediate tyre, hereinafter called the control tyre.

##### 3.233.22.4.9.2. Principle of the approach

The principle lies upon the use of a control tyre and 2 different vehicles for the assessment of a candidate tyre in comparison with a reference tyre.

One vehicle can fit the reference tyre and the control tyre, the other the control tyre and the candidate tyre. All conditions are in conformity with paragraph 3.233.22.4.7.

The first assessment is a comparison between the control tyre and the reference tyre. The result (Snow Grip Index 1) is the relative efficiency of the control tyre compared to the reference tyre.

The second assessment is a comparison between the candidate tyre and the control tyre. The result (Snow Grip Index 2) is the relative efficiency of the candidate tyre compared to the control tyre.

The second assessment is done on the same track as the first one. The air temperature must be in the range of +/- 5 deg C of the temperature of the first assessment. The control tyre set is the same set as the set used for the first assessment.

The Snow Grip performance Index of the candidate tyre compared to the reference tyre is deduced by multiplying the relative efficiencies calculated above:

$$\text{Snow Grip Index} = \text{SG1} \times \text{SG2}$$

3.233.22.4.9.3. Selection of a set of tyres as a control tyre set

A control tyre set is a group of identical tyres made in the same factory during one week period.

3.233.22.4.10. Storage and preservation

Before the first assessment (control tyre / reference tyre), normal storage conditions can be used. It is necessary that all the tyres of a control tyre set have been stored in the same conditions.

As soon as the control tyre set has been assessed in comparison with the reference tyre, specific storage conditions shall be applied for Control tyres replacement.

When irregular wear or damage results from tests, or when wear influences the test results, the use of the tyre shall be discontinued.

## Annex 1

### Speed symbol table

<i>Speed symbol</i>	<i>Corresponding speed km/h</i>
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300

## Annex 2

### Load Index (LI) and equivalent load capacity table

<i>LI</i>	<i>Kg</i>	<i>LI</i>	<i>kg</i>	<i>LI</i>	<i>kg</i>	<i>LI</i>	<i>kg</i>	<i>LI</i>	<i>kg</i>
0	45	27	97.5	54	212	81	462	108	1 000
1	46.2	28	100	55	218	82	475	109	1 030
2	47.5	29	103	56	224	83	487	110	1 060
3	48.7	30	106	57	230	84	500	111	1 090
4	50.0	31	109	58	236	85	515	112	1 120
5	51.5	32	112	59	243	86	530	113	1 150
6	53.0	33	115	60	250	87	545	114	1 180
7	54.5	34	118	61	257	88	560	115	1 215
8	56.0	35	121	62	265	89	580	116	1 250
9	58.0	36	125	63	272	90	600	117	1 285
10	60.0	37	128	64	280	91	615	118	1 320
11	61.5	38	132	65	290	92	630	119	1 360
12	63.0	39	136	66	300	93	650	120	1 400
13	65.0	40	140	67	307	94	670	121	1 450
14	67.0	41	145	68	315	95	690	122	1 500
15	69.0	42	150	69	325	96	710	123	1 550
16	71.0	43	155	70	335	97	730	124	1 600
17	73.0	44	160	71	345	98	750	125	1 650
18	75.0	45	165	72	355	99	775	126	1 700
19	77.5	46	170	73	365	100	800	127	1 750
20	80.0	47	175	74	375	101	825	128	1 800
21	82.5	48	180	75	387	102	850	129	1 850
22	85.0	49	185	76	400	103	875	130	1 900
23	87.5	50	190	77	412	104	900		
24	90.0	51	195	78	425	105	925		
25	92.5	52	200	79	437	106	950		
26	95.0	53	206	80	450	107	975		



## Annex 3

**Nominal rim diameter code table**<sup>[AR61]</sup>

Nominal rim diameter code ("d" symbol)	Value of the "d" symbol expressed in mm <sup>[N62]</sup>
1	333
9	229
10	254
	279
	305
	330
	356
	368
	381
	406
	419
	432
	445
	457
	483
	495
	508
	521
	533
	559
	572
	584
	610
	622
	635
	660
27	686
28	711
29	737
30	762



Annex 4

Relation between the pressure index ("PSI") and the units of pressure

Pressure Index ("PSI")	Bar[JN63]	kPa
20	1.4	140
25	1.7	170
30	2.1	210
35	2.4	240
40	2.8	280
45	3.1	310
50	3.4	340
55	3.8	380
60	4.1	410
65	4.5	450
70	4.8	480
75	5.2	520
80	5.5	550
85	5.9	590
90	6.2	620
95	6.6	660
100	6.9	690
105	7.2	720
110	7.6	760
115	7.9	790
120	8.3	830
125	8.6	860
130	9.0	900
135	9.3	930
140	9.7	970
145	10.0	1 000
150	10.3	1 030
...	...	...

Relation between the pressure index ("psi") and the units of pressure (kPa)

0	1	2	3	4	5	6	7
8	9	10	11	12	13	14	15
16	17	18	19	20	21	22	23
24	25	26	27	28	29	30	31
32	33	34	35	36	37	38	39
40	41	42	43	44	45	46	47
48	49	50	51	52	53	54	55
56	57	58	59	60	61	62	63
64	65	66	67	68	69	70	71
72	73	74	75	76	77	78	79
80	81	82	83	84	85	86	87
88	89	90	91	92	93	94	95
96	97	98	99	100	101	102	103
104	105	106	107	108	109	110	111
112	113	114	115	116	117	118	119
120	121	122	123	124	125	126	127
128	129	130	131	132	133	134	135
136	137	138	139	140	141	142	143
144	145	146	147	148	149	150	151
152	153	154	155	156	157	158	159
160	161	162	163	164	165	166	167
168	169	170	171	172	173	174	175
176	177	178	179	180	181	182	183
184	185	186	187	188	189	190	191
192	193	194	195	196	197	198	199
200	201	202	203	204	205	206	207
208	209	210	211	212	213	214	215
216	217	218	219	220	221	222	223
224	225	226	227	228	229	230	231
232	233	234	235	236	237	238	239
240	241	242	243	244	245	246	247
248	249	250	251	252	253	254	255
256	257	258	259	260	261	262	263
264	265	266	267	268	269	270	271
272	273	274	275	276	277	278	279
280	281	282	283	284	285	286	287
288	289	290	291	292	293	294	295
296	297	298	299	300	301	302	303
304	305	306	307	308	309	310	311
312	313	314	315	316	317	318	319
320	321	322	323	324	325	326	327
328	329	330	331	332	333	334	335
336	337	338	339	340	341	342	343
344	345	346	347	348	349	350	351
352	353	354	355	356	357	358	359
360	361	362	363	364	365	366	367
368	369	370	371	372	373	374	375
376	377	378	379	380	381	382	383
384	385	386	387	388	389	390	391
392	393	394	395	396	397	398	399
400	401	402	403	404	405	406	407
408	409	410	411	412	413	414	415
416	417	418	419	420	421	422	423
424	425	426	427	428	429	430	431
432	433	434	435	436	437	438	439
440	441	442	443	444	445	446	447
448	449	450	451	452	453	454	455
456	457	458	459	460	461	462	463
464	465	466	467	468	469	470	471
472	473	474	475	476	477	478	479
480	481	482	483	484	485	486	487
488	489	490	491	492	493	494	495
496	497	498	499	500	501	502	503
504	505	506	507	508	509	510	511
512	513	514	515	516	517	518	519
520	521	522	523	524	525	526	527
528	529	530	531	532	533	534	535
536	537	538	539	540	541	542	543
544	545	546	547	548	549	550	551
552	553	554	555	556	557	558	559
560	561	562	563	564	565	566	567
568	569	570	571	572	573	574	575
576	577	578	579	580	581	582	583
584	585	586	587	588	589	590	591
592	593	594	595	596	597	598	599
600	601	602	603	604	605	606	607
608	609	610	611	612	613	614	615
616	617	618	619	620	621	622	623
624	625	626	627	628	629	630	631
632	633	634	635	636	637	638	639
640	641	642	643	644	645	646	647
648	649	650	651	652	653	654	655
656	657	658	659	660	661	662	663
664	665	666	667	668	669	670	671
672	673	674	675	676	677	678	679
680	681	682	683	684	685	686	687
688	689	690	691	692	693	694	695
696	697	698	699	700	701	702	703
704	705	706	707	708	709	710	711
712	713	714	715	716	717	718	719
720	721	722	723	724	725	726	727
728	729	730	731	732	733	734	735
736	737	738	739	740	741	742	743
744	745	746	747	748	749	750	751
752	753	754	755	756	757	758	759
760	761	762	763	764	765	766	767
768	769	770	771	772	773	774	775
776	777	778	779	780	781	782	783
784	785	786	787	788	789	790	791
792	793	794	795	796	797	798	799
800	801	802	803	804	805	806	807
808	809	810	811	812	813	814	815
816	817	818	819	820	821	822	823
824	825	826	827	828	829	830	831
832	833	834	835	836	837	838	839
840	841	842	843	844	845	846	847
848	849	850	851	852	853	854	855
856	857	858	859	860	861	862	863
864	865	866	867	868	869	870	871
872	873	874	875	876	877	878	879
880	881	882	883	884	885	886	887
888	889	890	891	892	893	894	895
896	897	898	899	900	901	902	903
904	905	906	907	908	909	910	911
912	913	914	915	916	917	918	919
920	921	922	923	924	925	926	927
928	929	930	931	932	933	934	935
936	937	938	939	940	941	942	943
944	945	946	947	948	949	950	951
952	953	954	955	956	957	958	959
960	961	962	963	964	965	966	967
968	969	970	971	972	973	974	975
976	977	978	979	980	981	982	983
984	985	986	987	988	989	990	991
992	993	994	995	996	997	998	999
1000	1001	1002	1003	1004	1005	1006	1007
1008	1009	1010	1011	1012	1013	1014	1015
1016	1017	1018	1019	1020	1021	1022	1023
1024	1025	1026	1027	1028	1029	1030	1031
1032	1033	1034	1035	1036	1037	1038	1039
1040	1041	1042	1043	1044	1045	1046	1047
1048	1049	1050	1051	1052	1053	1054	1055
1056	1057	1058	1059	1060	1061	1062	1063
1064	1065	1066	1067	1068	1069	1070	1071
1072	1073	1074	1075	1076	1077	1078	1079
1080	1081	1082	1083	1084	1085	1086	1087
1088	1089	1090	1091	1092	1093	1094	1095
1096	1097	1098	1099	1100	1101	1102	1103
1104	1105	1106	1107	1108	1109	1110	1111
1112	1113	1114	1115	1116	1117	1118	1119
1120	1121	1122	1123	1124	1125	1126	1127
1128	1129	1130	1131	1132	1133	1134	1135
1136	1137	1138	1139	1140	1141	1142	1143
1144	1145	1146	1147	1148	1149	1150	1151
1152	1153	1154	1155	1156	1157	1158	1159
1160	1161	1162	1163	1164	1165	1166	1167
1168	1169	1170	1171	1172	1173	1174	1175
1176	1177	1178	1179	1180	1181	1182	1183
1184	1185	1186	1187	1188	1189	1190	1191
1192	1193	1194	1195	1196	1197	1198	1199
1200	1201	1202	1203	1204	1205	1206	1207
1208	1209	1210	1211	1212	1213	1214	1215
1216	1217	1218	1219	1220	1221	1222	1223
1224	1225	1226	1227	1228	1229	1230	1231
1232	1233	1234	1235	1236	1237	1238	1239
1240	1241	1242	1243	1244	1245	1246	1247
1248	1249	1250	1251	1252	1253	1254	1255
1256	1257	1258	1259	1260	1261	1262	1263
1264	1265	1266	1267	1268	1269	1270	1271
1272	1273	1274	1275	1276	1277	1278	1279
1280	1281	1282	1283	1284	1285	1286	1287
1288	1289	1290	1291	1292	1293	1294	1295
1296	1297	1298	1299	1300	1301	1302	1303
1304	1305	1306	1307	1308	1309	1310	1311
1312	1313	1314	1315	1316	1317	1318	1319
1320	1321	1322	1323	1324	1325	1326	1327
1328	1329	1330	1331	1332	1333	1334	1335
1336	1337	1338	1339	1340	1341	1342	1343
1344	1345	1346	1347	1348	1349	1350	1351
1352	1353	1354	1355	1356	1357	1358	1359
1360	1361	1362	1363	1364	1365	1366	1367
1368	1369	1370	1371	1372	1373	1374	1375
1376	1377	1378	1379	1380	1381	1382	1383
1384	1385	1386	1387	1388	1389	1390	1391

## Annex 5

### Variation of load capacity with speed commercial vehicles tyres

Variation of load capacity (per cent)										
Speed (km/h)	All load indices				Load indices $\geq 122^1$		Load indices $\leq 121^1$			
	Tyre speed symbol				Tyre speed symbol		Tyre speed symbol			
	F	G	J	K	L	M	L	M	N	P <sup>2</sup>
0	+150	+150	+150	+150	+150	+150	+110	+110	+110	+110
5	+110	+110	+110	+110	+110	+110	+90	+90	+90	+90
10	+80	+80	+80	+80	+80	+80	+75	+75	+75	+75
15	+65	+65	+65	+65	+65	+65	+60	+60	+60	+60
20	+50	+50	+50	+50	+50	+50	+50	+50	+50	+50
25	+35	+35	+35	+35	+35	+35	+42	+42	+42	+42
30	+25	+25	+25	+25	+25	+25	+35	+35	+35	+35
35	+19	+19	+19	+19	+19	+19	+29	+29	+29	+29
40	+15	+15	+15	+15	+15	+15	+25	+25	+25	+25
45	+13	+13	+13	+13	+13	+13	+22	+22	+22	+22
50	+12	+12	+12	+12	+12	+12	+20	+20	+20	+20
55	+11	+11	+11	+11	+11	+11	+17.5	+17.5	+17.5	+17.5
60	+10	+10	+10	+10	+10	+10	+15.0	+15.0	+15.0	+15.0
65	+7.5	+8.5	+8.5	+8.5	+8.5	+8.5	+13.5	+13.5	+13.5	+13.5
70	+5.0	+7.0	+7.0	+7.0	+7.0	+7.0	+12.5	+12.5	+12.5	+12.5
75	+2.5	+5.5	+5.5	+5.5	+5.5	+5.5	+11.0	+11.0	+11.0	+11.0
80	0	+4.0	+4.0	+4.0	+4.0	+4.0	+10.0	+10.0	+10.0	+10.0
85	-3	+2.0	+3.0	+3.0	+3.0	+3.0	+8.5	+8.5	+8.5	+8.5
90	-6	0	+2.0	+2.0	+2.0	+2.0	+7.5	+7.5	+7.5	+7.5
95	-10	-2.5	+1.0	+1.0	+1.0	+1.0	+6.5	+6.5	+6.5	+6.5
100	-15	-5	0	0	0	0	+5.0	+5.0	+5.0	+5.0
105		-8	-2	0	0	0	+3.75	+3.75	+3.75	+3.75
110		-13	-4	0	0	0	+2.5	+2.5	+2.5	+2.5
115			-7	-3	0	0	+1.25	+1.25	+1.25	+1.25
120			-12	-7	0	0	0	0	0	0
125						0	-2.5	0	0	0

<sup>1</sup> The load indices refer to a single operation.

<sup>2</sup> Load variations are not allowed for speeds above 160 km/h. For tyre speed symbols "Q" and above the speed corresponding to the tyre speed symbol (Annex 1) specifies the maximum speed permitted for the tyre.

**Based on ECE/TRANS/WP.29/2016/70  
Annex 5**

<i>Speed (km/h)</i>	<i>All load indices</i>				<i>Load indices ≥ 122<sup>1</sup></i>		<i>Load indices ≤ 121<sup>1</sup></i>			
	<i>Tyre speed symbol</i>				<i>Tyre speed symbol</i>		<i>Tyre speed symbol</i>			
130						0	-5.0	0	0	0
135							-7.5	-2.5	0	0
140							-10	-5	0	0
145								-7.5	-2.5	0
150								-10.0	-5.0	0
155									-7.5	-2.5
160									-10.0	-5.0

## Annex 6

### Tyre-size designations and dimensions

Table A  
Code designated sizes mounted on 5° tapered rims or flat base rims

<i>Tyre size designation</i>	<i>Measuring rim width Code</i>	<i>Nominal rim diameter d (mm)</i>	<i>Outer diameter D (mm)</i>	<i>Section width S (mm)</i>
<i>Std. series</i>			<i>Radial</i>	<i>Radial</i>
		○	○	○
4.00R10(*)	3.00	254	466	108
4.00R12(*)	3.00	305	517	108
	○	○	○	○
4.50R10(*)	3.50	254	490	125
4.50R12(*)	3.50	305	545	125
	○	○	○	○
5.00R10(*)	3.50	254	516	134
5.00R12(*)	3.50	305	568	134
6.00R9	4.00	229	540	160
6.00R14C	4.50	356	626	158
6.00R16(*)	4.50	406	728	170
6.50R10	5.00	254	588	177
6.50R14C	5.00	356	640	170
6.50R16(*)	4.50	406	742	176
6.50R20(*)	5.00	508	860	181
7.00R12	5.00	305	672	192
7.00R14C	5.00	356	650	180
7.00R15(*)	5.00	381	746	197
7.00R16C	5.50	406	778	198
7.00R16	5.50	406	784	198
7.00R20	5.50	508	892	198
7.50R10	5.50	254	645	207
7.50R14C	5.50	356	686	195
7.50R15(*)	6.00	381	772	212
7.50R16(*)	6.00	406	802	210
7.50R17(*)	6.00	432	852	210
8.25R15	6.50	381	836	230
8.25R16	6.50	406	860	230
	6.00	381	840	249
	6.50	406	912	246
				○

(\*) The tyre size designation may be supplemented with the letter "C".

Table B  
Tyres for light commercial vehicles

<i>Tyre size designation</i>	<i>Measuring rim width code</i>	<i>Nominal rim diameter d (mm)</i>	<i>Outer diameter D (mm)</i>	<i>Section width S (mm)</i>
<i>Metric designated</i>				
145 R 10 C	4.00	254	492	147
145 R 12 C	4.00	305	542	147
145 R 13 C	4.00	330	566	147
145 R 14 C	4.00	356	590	147
145 R 15 C	4.00	381	616	147
155 R 12 C	4.50	305	550	157
155 R 13 C	4.50	330	578	157
155 R 14 C	4.50	356	604	157
165 R 13 C	4.50	330	596	167
165 R 14 C	4.50	356	622	167
165 R 15 C	4.50	381	646	167
175 R 13 C	5.00	330	608	178
175 R 14 C	5.00	356	634	178
175 R 16 C	5.00	406	684	178
185 R 13 C	5.50	330	624	188
185 R 14 C	5.50	356	650	188
185 R 15 C	5.50	381	674	188
185 R 16 C	5.50	406	700	188
195 R 14 C	5.50	356	666	198
195 R 15 C	5.50	381	690	198
195 R 16 C	5.50	406	716	198
205 R 14 C	6.00	356	686	208
205 R 15 C	6.00	381	710	208
205 R 16 C	6.00	406	736	208
215 R 14 C	6.00	356	700	218
215 R 15 C	6.00	381	724	218
215 R 16 C	6.00	406	750	218
245 R 16 C	7.00	406	798	248
17 R 15 C	5.00	381	678	178
17 R 380 C	5.00	381	678	178
17 R 400 C	150 mm	400	698	186
19 R 400 C	150 mm	400	728	200
<i>Code designated</i>				
5.60 R 12 C	4.00	305	570	150
6.40 R 13 C	5.00	330	648	172
6.70 R 13 C	5.00	330	660	180
6.70 R 14 C	5.00	356	688	180
6.70 R 15 C	5.00	381	712	180



Table C  
Tyres for special applications

Tyre size designation	Measuring rim width code	Nominal rim diameter d (mm)	Outer diameter D (mm)	Section width S (mm)
<i>Code designated</i>				
		○	○	○
		○	○	○
		○	○	○
		○	○	○
21x8R9	6.00	229	535	200
21x4	2.32	330	565	113
22x4 1/2	3.11	330	595	132
23x5	3.75	330	635	155
23x9R10	6.50	254	595	225
25x6	3.75	330	680	170
27x10R12	8.00	305	690	255
28x9R15	7.00	381	707	216
<i>Metric designated</i>				
200R15	6.50	381	730	205
250R15	7.50	381	735	250
300R15	8.00	381	840	300

Table D  
Tyres with LT designation

Tolerances shown at the bottom of the tables apply in place of those shown in paragraphs 3.20.6.2.33-21.1.4.2.2.2. and 3.20.6.1.23-21.1.3.2.<sup>[AR64]</sup>

Outer diameters are listed for the various categories of use: Normal, Snow, and Special.

Tyre size designation	Measuring rim width code	Nominal rim diameter d(mm)	Outer diameter D (mm) <sup>1</sup>		Section width S (mm) <sup>2</sup>
			Normal	Snow	
6.00R16LT	4.50	406	732	743	173
6.50R16LT	4.50	406	755	767	182
6.70R16LT	5.00	406	722	733	191
7.00R13LT	5.00	330	647	658	187
7.00R14LT	5.00	356	670	681	187
7.00R15LT	5.50	381	752	763	202
7.00R16LT	5.50	406	778	788	202
7.10R15LT	5.00	381	738	749	199
7.50R15LT	6.00	381	782	794	220
7.50R16LT	6.00	406	808	819	220
8.25R16LT	6.50	406	859	869	241
9.00R16LT	6.50	406	890	903	257
G78R15LT	6.00	381	711	722	212
H78R15LT	6.00	381	727	739	222
L78R15LT	6.50	381	749	760	236
L78R16LT	6.50	406	775	786	236
7R14.5LT <sup>3</sup>	6.00	368	677		185
8R14.5LT <sup>3</sup>	6.00	368	707		203
9R14.5LT <sup>3</sup>	7.00	368	711		241
7R17.5LT	5.25	445	758	769	189
8R17.5LT	5.25	445	788	799	199

<sup>1</sup> Coefficient "b" for the calculation of Dmax: 1.08.

<sup>2</sup> Overall width may exceed this value up to +8 per cent.

<sup>3</sup> The suffix "MH" may replace "LT" in the tyre size designation (e.g. 7R14.5 MH) where MH stands for Mobile Home.

Table E

**High flotation LT tyres**[AR65]

Tyre-size designation <sup>1</sup>	Measuring rim width code	Nominal rim diameter <i>d</i> (mm)	Outer diameter <i>D</i> (mm) <sup>2</sup>		Section width <i>S</i> (mm) <sup>3</sup>
			Normal	Snow	
9R15LT	8.00	381	744	755	254
10R15LT	8.00	381	773	783	264
11R15LT	8.00	381	777	788	279
24x7.50R13LT	6.00	330	597	604	191
27x8.50R14LT	7.00	356	674	680	218
28x8.50R15LT	7.00	381	699	705	218
29x9.50R15LT	7.50	381	724	731	240
30x9.50R15LT	7.50	381	750	756	240
31x10.50R15LT	8.50	381	775	781	268
31x11.50R15LT	9.00	381	775	781	290
31x12.50R15LT	10.00	381	775	781	318
31x13.50R15LT	11.00	381	775	781	345
31x15.50R15LT	12.00	381	775	781	390
32x11.50R15LT	9.00	381	801	807	290
33x9.50 R15LT	7.50	381	826	832	240
33x10.50R15LT	8.50	381	826	832	268
33x10.50R17LT	8.50	432	826	832	268
33x10.50R18LT	8.50	457	826	832	268
33x11.50R18LT	9.00	457	826	832	290
33x12.50R15LT	10.00	381	826	832	318
33x12.50R17LT	10.00	432	826	832	318
33x12.50R18LT	10.00	457	826	832	318
33x12.50R20LT	10.00	508	826	832	318
33x12.50R22LT	10.00	559	826	832	318
33x13.50R15LT	11.00	381	826	832	345
33x15.50R15LT	12.00	381	826	832	390
34x10.50R17LT	8.50	432	851	858	268
34x12.50R18LT	10.00	457	851	858	318
<b>LT</b>	<b>9.00</b>	<b>457</b>	<b>877</b>	<b>883</b>	<b>290</b>
<b>LT</b>	<b>9.00</b>	<b>508</b>	<b>877</b>	<b>883</b>	<b>290</b>
35x12.50R15LT	10.00	381	877	883	318
35x12.50R17LT	10.00	432	877	883	318
35x12.50R18LT	10.00	457	877	883	318
35x12.50R20LT	10.00	508	877	883	318

Tyre-size designation <sup>1</sup>	Measuring rim width code	Nominal rim diameter <i>d</i> (mm)	Outer diameter <i>D</i> (mm) <sup>2</sup>		Section width <i>S</i> (mm) <sup>3</sup>
			Normal	Snow	
35x12.50R22LT	10.00	559	877	883	318
35x13.50R15LT	11.00	381	877	883	345
35x13.50R18LT	11.00	457	877	883	345
35x13.50R20LT	11.00	508	877	883	345
35x14.50R15LT	12.00	381	877	883	372
36x13.50R18LT	11.00	457	902	908	345
36x14.50R15LT	12.00	381	902	908	372
36x14.50R17LT	12.00	432	902	908	372
36x14.50R18LT	12.00	457	902	908	372
36x15.50R15LT	12.00	381	902	908	390
<b>LT</b>	<b>9.00</b>	<b>508</b>	<b>928</b>	<b>934</b>	<b>290</b>
37x12.50R15LT	10.00	381	928	934	318
37x12.50 R17LT	10.00	432	928	934	318
37x12.50R18LT	10.00	457	928	934	318
37x12.50R20LT	10.00	508	928	934	318
37x12.50R22LT	10.00	559	928	934	318
37x13.50R15LT	11.00	381	928	934	345
37x13.50R17LT	11.00	432	928	934	345
37x13.50R18LT	11.00	457	928	934	345
37x13.50R20LT	11.00	508	928	934	345
37x13.50R22LT	11.00	559	928	934	345
37x13.50R24LT	11.00	610	928	934	345
37x14.50R15LT	12.00	381	928	934	372
38x13.50R17LT	11.00	432	953	959	345
38x13.50R20LT	11.00	508	953	959	345
<b>LT</b>	<b>11.00</b>	<b>559</b>	<b>953</b>	<b>959</b>	<b>345</b>
38x13.50R24LT	11.00	610	953	959	345
38x14.50R17LT	12.00	432	953	959	372
38x14.50R18LT	12.00	457	953	959	372
38x14.50R20LT	12.00	508	953	959	372
38x15.50R15LT	12.00	381	953	959	390
38x15.50R17LT	12.00	432	953	959	390
38x15.50R18LT	12.00	457	953	959	390
38x15.50R20LT	12.00	508	953	959	390
39x13.50R17LT	11.00	432	978	985	345
40x13.50R17LT	11.00	432	1004	1010	345
40x13.50R20LT	11.00	508	1004	1010	345
40x14.50R17LT	12.00	432	1004	1010	372
40x14.50R18LT	12.00	457	1004	1010	372
40x14.50R20LT	12.00	508	1004	1010	372
40x15.50R20LT	12.00	508	1004	1010	390

Tyre-size designation <sup>1</sup>	Measuring rim width code	Nominal rim diameter <i>d</i> (mm)	Outer diameter <i>D</i> (mm) <sup>2</sup>		Section width <i>S</i> (mm) <sup>3</sup>
			Normal	Snow	
40x15.50R22LT	12.00	559	1004	1010	390
40x15.50R24LT	12.00	610	1004	1010	390
42x14.50R17LT	12.00	432	1055	1061	372
42x14.50R20LT	12.00	508	1055	1061	372
8.00R16.5LT	6.00	419	720	730	203
8.75R16.5LT	6.75	419	748	759	222
9.50R16.5LT	6.75	419	776	787	241
10R16.5LT	8.25	419	762	773	264
12R16.5LT	9.75	419	818	831	307
30x9.50R16.5LT	7.50	419	750	761	240
31x10.50R16.5LT	8.25	419	775	787	266
33x12.50R16.5LT	9.75	419	826	838	315
35x12.50 R16.5LT	10.00	419	877	883	318
37x12.50R16.5LT	9.75	419	928	939	315
37x14.50R16.5LT	11.25	419	928	939	365

## Annex 7

### **Tyre standards organizations**

The Tire and Rim Association, Inc. (TRA)

The European Tyre and Rim Technical Organisation (ETRTO)

The Japan Automobile Tyre Manufacturers' Association (JATMA)

The Tyre and Rim Association of Australia (TRAA)

South Africa Bureau of Standards (SABS)

China Association for Standardization (CAS)

Indian Tyre Technical Advisory Committee (ITTAC)

International Standards Organization (ISO)

**Associação Latino Americana de Pneus e Aros (Brazil) (ALAPA)**

## Annex 8

### Rolling resistance test equipment tolerances

1. Purpose

The limits specified in this annex are necessary in order to achieve suitable levels of repeatable test results, which can also be correlated among various test laboratories. These tolerances are not meant to represent a complete set of engineering specifications for test equipment; rather, they should serve as guidelines for achieving reliable test results.

2. Test rims

2.1. Width

For passenger car tyre rims (C1 tyres), the test rim width shall be the same as the measuring rim determined in ISO 4000-1:2010 clause 6.2.2.

For truck and bus tyres (C2 and C3), the rim width shall be the same as the measuring rim determined in ISO 4209-1:2001, clause 5.1.3.

In cases where the width is not defined in the above mentioned ISO Standards, the rim width as defined by one of the standards organizations as specified in Annex 7 may be used.

2.2. Run-out

Run-out shall meet the following criteria:

- (a) Maximum radial run-out: 0.5 mm;
- (b) Maximum lateral run-out: 0.5 mm.

3. Drum / tyre alignment

General:

Angle deviations are critical to the test results.

3.1. Load application

The direction of tyre loading application shall be kept normal to the test surface and shall pass through the wheel centre within

- (a) 1 mrad for the force and deceleration methods;
- (b) 5 mrad for the torque and power methods.

3.2. Tyre alignment

3.2.1. Camber angle

The plane of the wheel shall be perpendicular to the test surface within 2 mrad for all methods.

3.2.2. Slip angle

The plane of the tyre shall be parallel to the direction of the test surface motion within 1 mrad for all methods.

4. Control accuracy

Test conditions shall be maintained at their specified values, independent of perturbations induced by the tyre and rim non-uniformity, such that the overall variability of the rolling resistance measurement is minimized. In order to meet this requirement, the average value of measurements taken during the rolling resistance data collection period shall be within the accuracies stated as follows:

- (a) Tyre loading:
  - (i) For  $LI \leq 121 \pm 20$  N or  $\pm 0.5$  per cent, whichever is greater;
  - (ii) For  $LI > 121 \pm 45$  N or  $\pm 0.5$  per cent whichever is greater.
- (b) Cold inflation pressure:  $\pm 3$  kPa;
- (c) Surface speed:
  - (i)  $\pm 0.2$  km/h for the power, torque and deceleration methods;
  - (ii)  $\pm 0.5$  km/h for the force method;
- (d) Time:
  - (i)  $\pm 0.02$  s for the time increments specified in paragraph 3.22.4.5.(b) for the data acquisition in the deceleration method in  $\Delta\omega/\Delta t$  form;
  - (ii)  $\pm 0.2$  per cent for the time increments specified in paragraph 3.22.4.5.(a) for the data acquisition in the deceleration method in  $d\omega/dt$  form;
  - (iii)  $\pm 5$  per cent for the other time durations specified in paragraph 3.22.

5. Instrumentation accuracy

The instrumentation used for readout and recording of test data shall be accurate within the tolerances stated below:

<i>Parameter</i>	<i>Load Index <math>\leq 121</math></i>	<i>Load Index <math>&gt; 121</math></i>
Tyre load	$\pm 10$ N or $\pm 0.5$ % <sup>(a)</sup>	$\pm 30$ N or $\pm 0.5$ % <sup>(a)</sup>
Inflation pressure	$\pm 1$ kPa	$\pm 1.5$ kPa
Spindle force	$\pm 0.5$ N or $\pm 0.5$ % <sup>(a)</sup>	$\pm 1.0$ N or $\pm 0.5$ % <sup>(a)</sup>
Torque input	$\pm 0.5$ Nm or $\pm 0.5$ % <sup>(a)</sup>	$\pm 1.0$ Nm or $\pm 0.5$ % <sup>(a)</sup>
Distance	$\pm 1$ mm	$\pm 1$ mm
Electrical power	$\pm 10$ W	$\pm 20$ W
Temperature	$\pm 0.2$ °C	
Surface speed	$\pm 0.1$ km/h	
Time	$\pm 0.01$ s - $\pm 0.1$ % - $\pm 10$ s <sup>(b)</sup>	
Angular velocity	$\pm 0.1$ %	

<sup>(a)</sup> Whichever is greater.



- (b)  $\pm 0.01$  s for the time increments specified in paragraph 3.22.4.5.(b) for the data acquisition in the deceleration method in  $\Delta\omega/\Delta t$  form  
 $\pm 0.1$  per cent for the time increments specified in paragraph 3.22.4.5.(a) for the data acquisition in the deceleration method in  $d\omega/dt$  form  
 $\pm 10$  sec for the other time durations specified in paragraph 3.22."
6. Compensation for load/spindle force interaction and load misalignment for the force method only
- Compensation of both load/spindle force interaction ("cross talk") and load misalignment may be achieved either by recording the spindle force for both forward and reverse tyre rotation or by dynamic machine calibration. If spindle force is recorded for forward and reverse directions (at each test condition), compensation is achieved by subtracting the "reverse" value from the "forward" value and dividing the result by two. If dynamic machine calibration is intended, the compensation terms may be easily incorporated in the data reduction.
- In cases where reverse tyre rotation immediately follows the completion of the forward tyre rotation, a warm-up time for reverse tyre rotation shall be at least 10 minutes for Class C1 tyres and 30 minutes for all other tyre types.
7. Test surface roughness
- The roughness, measured laterally, of the smooth steel drum surface shall have a maximum centreline average height value of  $6.3 \mu\text{m}$ .
- Note:* In cases where a textured drum surface is used instead of a smooth steel surface, this fact is noted in the test report. The surface texture shall then be  $180 \mu\text{m}$  deep (80 grit) and the laboratory is responsible for maintaining the surface roughness characteristics. No specific correction factor is recommended for cases where a textured drum surface is used.

## Annex 9

### Measuring rim width

1. Class C1 tyres

The measuring rim width  $R_m$  is equal to the product of the nominal section width  $S_N$  and the coefficient  $K_2$ :

$$R_m = K_2 \cdot S_N$$

rounded to the nearest standardized rim, where  $K_2$  is the rim/section width ratio coefficient. For tyres mounted on 5° drop-centre rims with a nominal diameter expressed by a two-figure code:

$K_2 = 0.7$  for nominal aspect ratios 95 to 75

$K_2 = 0.75$  for nominal aspect ratios 70 to 60

$K_2 = 0.8$  for nominal aspect ratios 55 and 50

$K_2 = 0.85$  for nominal aspect ratio 45

$K_2 = 0.9$  for nominal aspect ratios 40 to 30

$K_2 = 0.92$  for nominal aspect ratios 20 and 25

2. Class C2 and C3 tyres

The measuring rim width  $R_m$  is equal to the product of the nominal section width  $S_N$ , and the coefficient  $K_4$ :

$R_m = K_4 \cdot S_N$  rounded to the nearest standardized rim width.

Table 1  
Coefficients for determining measuring rim width

<i>Tyre Structure Code</i>	<i>Type of rim</i>	<i>Nominal aspect ratio H/S</i>	<i>Measuring rim/ section ratio <math>K_4</math></i>
B, D, R	5° tapered	100 to 75	0.70
		70 and 65	0.75
		60	0.75
		55	0.80
		50	0.80
		45	0.85
		40	0.90
	15° tapered (drop-centre)	90 to 65	0.75
		60	0.80
		55	0.80
		50	0.80
		45	0.85
		40	0.85

*Note:* Other factors may be established for new tyre concepts (structures).

## Annex 10

### Deceleration method: Measurements and data processing for deceleration value obtaining in differential form $d\omega/dt$ .

1. Record dependency "distance-time" of rotating body decelerated from peripheral with a speed range such as 82 to 78 km/h or 62 to 58 km/h dependent on tyre class (Paragraph 3.22.4.2., table 1) in a discrete form (figure 1) for a rotating body:


$$z=f(t_z)$$

where:

$z$  is a number of body revolutions during deceleration;

$t_z$  is end time of revolution number  $z$  in seconds recorded with 6 digits after zero.

Figure 1

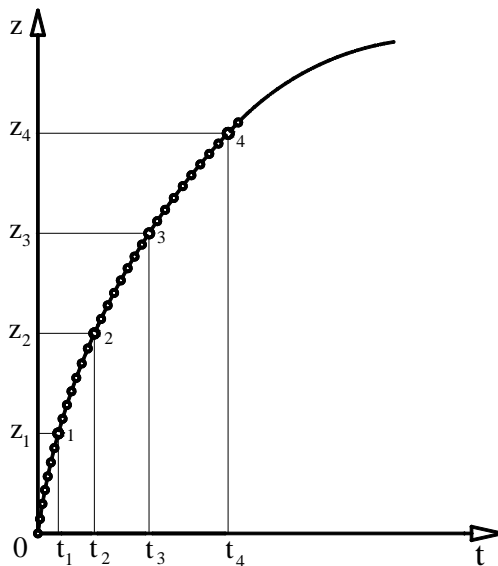

*Note 1:* The lower speed of the recording range may be reduced down to 60 km/h when test speed is 80 km/h and 40 km/h when the test speed is 60 km/h.

2. Approximate recorded dependency by continuous, monotonic, differentiable function:
  - 2.1. Choose the value nearest to the maximum of  $z$  dividable by 4 and divide it into 4 equal parts with bounds: 0,  $z_1(t_1)$ ,  $z_2(t_2)$ ,  $z_3(t_3)$ ,  $z_4(t_4)$ .
  - 2.2. Work out the system for 4 equations each of the form:

$$z_m = A \ln \frac{\cos B(T_\Sigma - t_m)}{\cos B T_\Sigma}$$

where unknowns:

A is a dimensionless constant,  
B is a constant in revolutions per second,  
 $T_{\Sigma}$  is a constant in seconds,  
m is the number of bounds shown in figure 1.

Insert in these 4 equations the coordinates of 4-th bound above.

- 2.3. Take constants A, B and  $T_{\Sigma}$  as the solution of the equation system of paragraph 2.2. above using iteration process and approximate measured data by formulae:

$$z(t) = A \ln \frac{\cos B(T_{\Sigma} - t)}{\cos B T_{\Sigma}}$$

where:

$z(t)$  is the current continuous angular distance in number of revolutions (not only integer values);  
t is time in seconds.

*Note 2:* Other approximating functions  $z = f(t_z)$  may be used if their adequacy is proven.

3. Calculate the deceleration  $j$  in revolutions per second squared ( $s^{-2}$ ) by the formula:

$$j = AB^2 + \frac{\omega^2}{A}$$

where:

$\omega$  is the angular speed in revolutions per second ( $s^{-1}$ ).  
For the case  $U_n = 80$  km/h;  $\omega = 22.222/R_r$  (or R).  
For the case  $U_n = 60$  km/h;  $\omega = 16.666/R_r$  (or R).

4. Estimate the quality of approximation of measured data and its accuracy by parameters:  
4.1. Standard deviation in percentages:

$$\sigma = \sqrt{\frac{1}{n-1} \sum_1^n \left[ 1 - \frac{z(t)}{z} \right]^2} \times 100\%$$

- 4.2. Coefficient of determination

$$R^2 = 1 - \frac{\sum_1^n [z - z(t)]^2}{\sum_1^n [z - \bar{z}]^2}$$

where:

$$\bar{z} = \frac{1}{n} \sum_{z=1}^n z = \frac{1}{n} (1 + 2 + \dots + n) = \frac{1+n}{2}$$

*Note 3:* The above calculations for this variant of the deceleration method for tyre rolling resistance measurement can be executed by the computer program "Deceleration Calculator" downloadable from the WP.29 website<sup>1</sup> as well as any software which allows the calculation of nonlinear regression.

---

<sup>1</sup> [http://www.unece.org/trans/main/wp29/wp29wgs/wp29gen/deceleration\\_calculator.html](http://www.unece.org/trans/main/wp29/wp29wgs/wp29gen/deceleration_calculator.html).

## Annex 11

### Test equipment and precision requirements of LT/C tyres

#### 1. High-speed durability tester

1.1 The drum diameter of the tester shall be 1700 mm±17 mm.

1.2 The test drum surface of the tester drum shall be a smooth steel surface, with the width greater than or equal to the total width of the section of test tire.

1.3 The loading capacity of the test loading device shall meet the requirements of test methods, with a precision of ±1.5% of the full scale.

1.4 The speed capacity of the tester drum and the test equipment shall meet the requirements of test methods, with a speed precision of +2 km/h.

1.5 The radial runout of the tester drum shall be <0.25 mm.

1.6 The ambient temperature measuring device shall be set at a place with the distance of 150 mm ~ 1000 mm from the test tire.

#### 2. Strength tester

2.1 The tester shall be equipped with a sufficiently long steel cylindrical plunger, of which the ends are semi-spherical, and the truck tires of metric series adopt different plunger diameters according to the provisions of Table 11.1.

Table 11.1 The plunger diameters used in the strength test for LT/C tires of metric series

Load index of single tire	The plunger diameter is ±0.5
≤12	19

Table 11.2 The plunger diameters used in the strength test for LT/C tires of imperial series

Type	The plunger diameter is ±6.5
Light truck tires	19

2.2 The plunger device shall be capable of applying load incrementally, and the force and displacement indicator shall have a precision of ±1% of full scale.

2.3 The equipment speed precision is ±3% of full scale.

#### 3. Inflation pressure gauge

The inflation pressure gauge shall at least have a maximum range of 1000kPa, and a precision of ±10kPa.

**Annex 12**

**Load Range and Ply Rating Table**

**Table 12.1 Table of Load Range and Ply Rating**

<b>Ply Rating</b>	<b>Load Range</b>
<b>2</b>	<b>A</b>
<b>4</b>	<b>B</b>
<b>6</b>	<b>C</b>
<b>8</b>	<b>D</b>
<b>10</b>	<b>E</b>
<b>12</b>	<b>F</b>
<b>14</b>	<b>G</b>



Annex 13

Tyre terms and definitions

1. High

---