



Commission économique pour l'Europe

Comité des transports intérieurs

Groupe de travail des transports de marchandises dangereuses**Réunion commune de la Commission d'experts du RID et
du Groupe de travail des transports de marchandises dangereuses**

Berne, 21-25 mars 2011

Point 5 b) de l'ordre du jour provisoire

Propositions diverses d'amendements au RID/ADR/ADN:**Nouvelles propositions****Aérosols (numéro ONU 1950) – Pression interne maximale
à 50°C****Communication de la Fédération européenne des aérosols (FEA)^{1,2}***Résumé*

Résumé analytique:	Amendements relatifs à la pression interne maximale à 50 °C pour les aérosols.
Mesure à prendre:	Modifier le texte actuel du 6.2.6.1.5 du RID/ADR.
Documents de référence:	--

¹ Conformément au programme de travail du Comité des transports intérieurs pour la période 2010-2014 (ECE/TRANS/208, par. 106 et ECE/TRANS/2010/8, activité 02.7 c)).

² Diffusée par l'Organisation intergouvernementale pour les transports internationaux ferroviaires sous la cote OTIF/RID/RC/2011/21.

Introduction

1. Afin d'éviter toute confusion, la Fédération européenne des aérosols (FEA) précise que le présent document n'a aucun rapport avec le document de la FEA intitulé «Aérosols (numéro ONU 1950) – Volume maximal de la phase liquide à 50 °C» (ST/SG/AC.10/C.3/2010/44).
2. La FEA a proposé à la Commission européenne d'adapter aux progrès techniques la Directive 75/324/CEE relative aux générateurs d'aérosols.
3. La FEA a informé le Sous-Comité d'experts du transport des marchandises dangereuses de l'ONU de cette démarche (voir le document informel INF.19 présenté à la trente-septième session du Sous-Comité). On trouvera dans l'annexe du présent document la proposition soumise par la Fédération à la Commission européenne.
4. Un groupe d'experts de la Directive sur les générateurs d'aérosols, composé d'experts de la Commission européenne et d'États membres de l'Union européenne, s'est réuni le 4 novembre 2010 et a décidé d'introduire dans la proposition relative à la prochaine adaptation de la Directive aux progrès techniques l'augmentation à 15 bars de la pression interne maximale à 50 °C pour les générateurs d'aérosols contenant des agents de dispersion non inflammables.
5. Comme elle l'a signalé, la FEA est disposée à examiner la question dans les règlements relatifs aux différents modes de transport. Pour des raisons pratiques toutefois, les examens correspondants ne peuvent pas avoir lieu entièrement en parallèle.
6. S'agissant du 6.2.6.1.5, la FEA propose de modifier uniquement les prescriptions relatives aux aérosols (n° ONU 1950) et de conserver telles quelles les prescriptions s'appliquant aux récipients de faible capacité contenant du gaz (cartouches à gaz) (n° ONU 2037).

Proposition

7. Les amendements qu'il est proposé d'apporter en ce qui concerne la pression interne maximale de 50°C pour les aérosols telle qu'elle est mentionnée au 6.2.6.1.5 du RID/ADR sont présentés ci-après en *caractères gras italiques*:

«La pression intérieure à 50 °C *des récipients de faible capacité contenant du gaz (cartouches à gaz) (n° ONU 2037)* ne doit dépasser ni les deux tiers de la pression d'épreuve, ni 1,32 MPa (13,2 bar). *Les récipients de faible capacité contenant du gaz (cartouches à gaz) doivent être remplis de manière qu'à 50 °C la phase liquide n'occupe pas plus de 95 % de leur capacité.*

La pression intérieure à 50 °C des générateurs d'aérosol (n° ONU 1950) ne doit dépasser ni les deux tiers de la pression d'épreuve, ni 1,20 MPa (12,0 bar). Cependant, si l'aérosol ne contient pas de gaz inflammable ni de mélange de gaz inflammables, la pression intérieure à 50 °C ne doit dépasser ni les deux tiers de la pression d'épreuve, ni 1,50 MPa (15,0 bar). Les générateurs d'aérosol doivent être remplis de manière qu'à 50 °C la phase liquide n'occupe pas plus de 95 % de leur capacité.»

Justification

8. Voir l'annexe ci-après.

Annexe

[English only]

Increase in maximum allowable internal pressure at 50 °C

FEA returns to its initial proposal: increase the maximum internal pressure at 50 °C for aerosols using non-flammable propellants from the currently allowed 13.2 bar to 15 bar.

The same level of safety as required by the current Directive obviously must be maintained, i.e. a factor of 1.5 to reach the minimum deformation pressure and 1.8 to minimum burst pressure.

This point was already discussed within the Member States' Experts Committee during the last comitology procedure. Some Member States' experts asked for additional information to support this increase of the allowable pressure and as a result the pressure of 13.2 bar was agreed as an interim measure in line with ADR.

Please find below the supporting information.

Introduction


The aerosol industry constantly strives to increase the environmental compatibility of aerosol products and to design these products and their handling in a permanently sustainable manner.

For this purpose using non-flammable compressed gas propellants, which may be a conceivable option for certain products given the premise that the spray efficiency is maintained, calls for an increase in the maximum internal pressure at 50 °C.

Tests have shown that, where compressed gases are used as propellants, an increase to 15 bar at 50 °C can lead to good results for the efficacy and performance of some products.

The following considerations, which serve to guarantee safety, apply to all aerosol containers.

Here it should be noted that compressed gases have more favourable pressure increase characteristics than liquefied propellants, so that the burst hazard is significantly lower in the case of compressed gases.

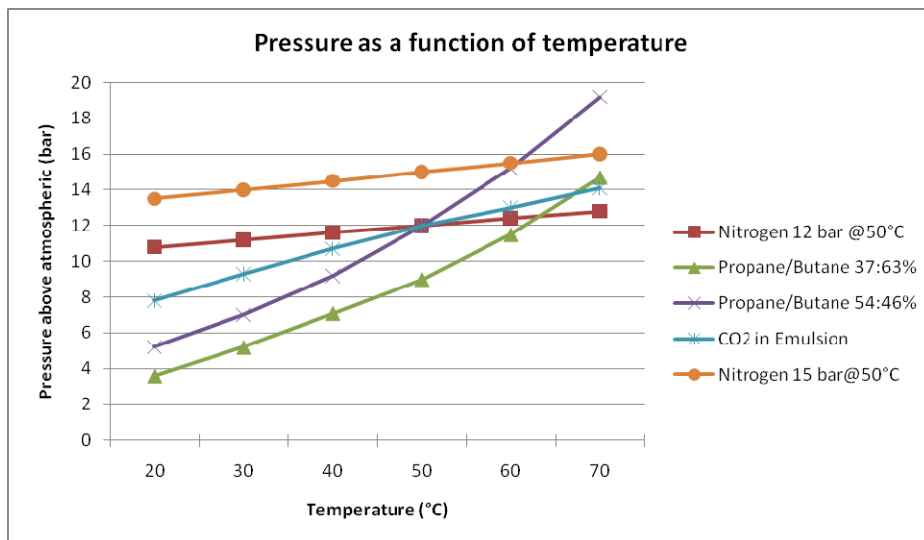

<i>Temperature (°C)</i>	<i>Nitrogen 12 bar @ 50°C (bar)</i>	<i>Propane/Butane 37:63% (bar)</i>	<i>Propane/Butane 54:46% (bar)</i>	<i>CO₂ in Emulsion (bar)</i>	<i>Nitrogen 15 bar@ 50°C (bar)</i>
20	10.8	3.6	5.2	7.8	13.5
30	11.2	5.2	7.0	9.3	14.0
40	11.6	7.1	9.2	10.7	14.5
50	12.0	9.0	12.0	12.0	15.0
60	12.4	11.5	15.2	13.0	15.5
70	12.8	14.7	19.2	14.1	16.0

Aerosol Container and Valve Manufacture

During the aerosol container and valve manufacturing process the various production steps as well as finished containers and valves are subjected to numerous inspections.

Current legislation allows aerosol containers pressurised at 13.2 bar at 50 °C if they contain non-flammable propellants. The proposed pressure increase (of approx. 13.6 %) to 15 bar is now technically feasible and the safety of the containers so pressurised can be reliably ensured. The relevant requirements are fully met by the quality systems that are already in place at all levels of the aerosol industry.

This has been confirmed by tests performed on appropriate aerosol containers. The valve, the container, and the container/valve assembly will be adapted in design and performance to suit the higher pressure level and will thus be safe.

Aerosol Valves

Material and design of cups (valves), crimp and clinch for "15 bar" applications have to be chosen, so that tightness compared to 13.2 bar applications is ensured.

In preparation, verifying tests to demonstrate compliance with the following parameters have been established:

- The valve cups for 15 bar applications have to be pressure resistant at the adjusted pressure compared to the pressure resistance of 'standard' cups for 13.2 bar applications (i.e. minimum 27.0°bar pressure resistance instead of 23.76 bar).

The movement of the cup boss under the defined pressure is a feature for evaluation of cups/valves.

Aerosol Containers

Both aluminium and tinplate aerosol containers have already been manufactured in "15.0 bar at 50°C" versions.

Such containers have been tested successfully both in internal test series during the aerosol container manufacturing process by container manufacturers and in external tests, using tests designed to check that:

- The containers develop no visible deformation when subjected to a load (deformation pressure) of 22.5 bar during 25 seconds,
- The containers resist a pressure of at least up to 27.0 bar without bursting.

The required pressure resistance was obtained by adapting the material thickness in the container geometry, thus meeting the demand for increased deformation and burst pressure levels.

The following table provides an overview of the various pressure levels and rating values that are valid at the various points of the process (aerosol container-makers, fillers):

<i>Maximum internal pressure at 50°C (as defined by ADD 75/324/EEC) (bar)</i>	<i>Test pressure (as defined by ADD 75/324/EEC) (bar)</i>	<i>Bursting pressure (as defined by ADD 75/324/EEC) (bar)</i>
10	15	18
12	18	21.6
13.2 ^a	19.8	23.76
15 ^b	22.5	27

^a Only for aerosols using non-flammable propellants.

^b Proposed change, only for aerosols using non-flammable propellants.

Aerosol Container Filling Process

Aerosol containers are filled under the most stringent safety conditions. The filling equipment used in the industry today can be adapted without difficulty to suit the slightly higher pressure level.

As is the current practice, safety devices will be used to prevent overfilled containers from being brought into circulation. Clinch dimensions are adapted at present – and will be adapted in future – to each specific container type and its appropriate valve.

The safety of the aerosol container/valve assembly will be guaranteed by a 100 % water bath test or an alternative test method.

Other tests with aerosols pressurised to 15 bar at 50 °C have demonstrated that such aerosols can be produced without showing any visible permanent distortion or leakage.

All other tests required by the Aerosol Dispensers Directive 75/324/EEC that are designed to guarantee the mechanical strength and chemical compatibility of aerosol packages have, of course, also to be performed.

Empty aerosol containers and filled aerosol dispensers have been tested to demonstrate that safe 15 bar at 50°C applications are technically feasible.

FEA proposes that the wording of the Annex to ADD should be amended as follows (in ***bold italics***):

3.1.2. Filling

At 50 °C, the pressure in the aerosol dispenser must not exceed 12 bar.

However, if the aerosol does not contain a gas or mixture of gases having a flammable range with air at 20 °C and a standard pressure of 1,013 bar, the maximum allowable pressure at 50 °C is ***15 bar***.

Identical requirements should apply to plastic aerosols in the same way.