

4 October 2010

---

## **Agreement**

### **Concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions\***

(Revision 2, including the amendments which entered into force on 16 October 1995)

---

## **Addendum 5: Regulation No. 6**

### **Revision 4 – Amendment 4**

Supplement 19 to the 01 series of amendments: Date of entry into force: 19 August 2010

### **Uniform provisions concerning the approval of direction indicators for power-driven vehicles and their trailers**



UNITED NATIONS

---

\* Former title of the Agreement: Agreement Concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts, don't at Geneva on 20 March 1958.

Paragraph 2.1., amend to read:

“2.1. The application for approval of a type of direction indicator shall be submitted by the holder of the trade name or mark or by his duly accredited representative. It shall specify to which category or to which of the categories 1, 1a, 1b, 2a, 2b, 5 or 6 according to Annex 1, the direction indicator belongs and, if it belongs to category 2, whether it has steady luminous intensity (category 2a) or whether it has variable luminous intensity (category 2b) and if the direction indicator may also be used in an assembly of two lamps of the same category. At the choice of the applicant, it will also specify that the device may be installed on the vehicle with different inclinations of the reference axis in respect to the vehicle reference planes and to the ground or rotate around its reference axis; these different conditions of installation shall be indicated in the communication form.”

Paragraph 4.2.2.1., amend to read:

“4.2.2.1. One or more of the numbers: 1, 1a, 1b, 2a, 2b, 5 or 6, according to whether the device belongs to one or more categories 1, 1a, 1b, 2a, 2b, 5 or 6 for which approval is sought in accordance with paragraph 2.1.;

Paragraph 6.1., amend to read:

“6.1. The light emitted by each of the two devices supplied must be in the case of direction indicators of categories 1, 1a, 1b, 2a, 2b, in the reference axes, in the case of direction indicators of categories 5 or 6 in direction A according to Annex 1 of not less than the minimum intensity and of not more than the maximum intensity specified below:

Direction indicator of category	Minimum luminous intensity in cd	Maximum luminous intensity in cd when used as	
		Single lamp	Lamp (single) marked “D” (see paragraph 4.2.2.3.)
1	175	1000	500
1a	250	1200	600
1b	400	1200	600
2a (steady)	50	500	250
2b (variable)	50	1000	500
5	0.6	280	140
6	50	280	140

.”

Paragraph 6.1.1., amend to read:

“6.1.1. For an assembly of two or more direction indicator lamps the total intensity shall not exceed the maximum value.”

Paragraph 6.4.1.1., amend to read:

“6.4.1.1 In divergence from paragraphs 6.4. and 6.4.1., for category 5 direction indicators, to the rear, a minimum value of 0.6 cd is required throughout the fields specified in Annex 1;”

Paragraph 6.4.3.1., amend to read:

“6.4.3.1 Throughout the fields defined in the diagrams in Annex 1, the intensity of the light emitted must be not less than 0.7 cd for devices of category 1b, not less than 0.3 cd for devices of categories 1, 1a, 2a, 2b and for those of category 2b by day; it shall not be less than 0.07 cd for devices of category 2b by night;”

Paragraphs 6.4.3.2. and 6.4.3.3., shall be deleted

Paragraph 6.4.3.4., renumber as paragraph 6.4.3.2.

Insert a new paragraph 14.14., to read:

“14.14. Existing approvals to direction indicator lamps of the categories 3 and 4 approved under this Regulation prior to the introduction of Supplement 16 to the 01 series of amendments, shall remain valid indefinitely.”

Annex 1,

The reference and the drawing referring to Categories 3 and 4 (front-side direction indicators), shall be deleted.

Annex 2,


Item 9, amend to read:

“9. Concise description:  
....  
Category: 1, 1a, 1b, 2a, 2b, 5, 6<sup>2</sup>  
....”

Annex 3, amend to read:

“... ”

The direction in which the arrows on the approval mark point, according to the category of the device, is shown below:

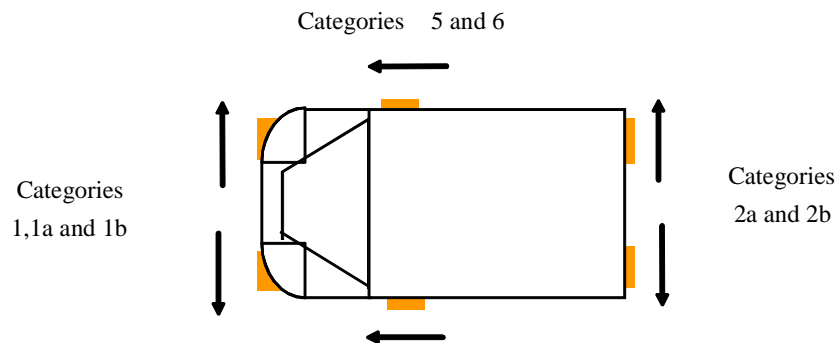

“... ”

Annex 4,

Paragraph 2, the title, amend to read:

“2. Table of standard light distribution in space for direction indicator lamps of categories 1, 1a, 1b, 2a, 2b”

Paragraph 2.1.1., amend to read:

“2.1.1. In the direction  $H = 0^\circ$  and  $V = 0^\circ$  for categories 1, 1a, 1b, 2a, 2b and in the case of category 5 in the angular area in the direction A as prescribed in Annex 1;”