

15 August 2012

Agreement

Concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be fitted and/or be used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions*

(Revision 2, including the amendments which entered into force on 16 October 1995)

Addendum 106: Regulation No. 107

Revision 3 – Amendment 4

05 series of amendments - Date of entry into force: 26 July 2012

Uniform provisions concerning the approval of category M₂ or M₃ vehicles with regard to their general construction



UNITED NATIONS

* Former title of the Agreement: Agreement Concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts, done at Geneva on 20 March 1958.

Paragraph 4.2., amend to read:

"4.2. An approval number ... Its first two digits (at present 05, corresponding to the 05 series of amendments) shall indicate ... of paragraph 2.2."

Insert new paragraphs 10.21. to 10.23., to read:

"10.21. As from the official date of entry into force of the 05 series of amendments, no Contracting Party applying this Regulation shall refuse to grant approval under this Regulation as amended by the 05 series of amendments.

10.22. As from 24 months after the date of entry into force of the 05 series of amendments, Contracting Parties applying this Regulation shall grant approvals only if the vehicle type to be approved meets the requirements of this Regulation as amended by the 05 series of amendments.

10.23. As from 36 months after the entry into force of the 05 series of amendments, Contracting Parties applying this Regulation may refuse to grant national/regional approvals and first national registration (first entry into service) of a vehicle which does not meet the requirements of the 05 series of amendments to this Regulation."


Annex 2, amend to read:

"Annex 2

Arrangements of approval marks

Model A

(See paragraph 4.4. of this Regulation)

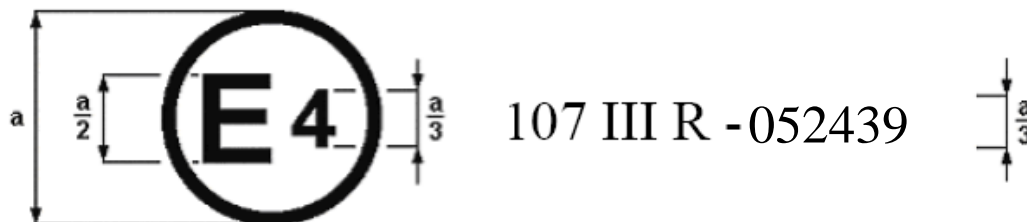


a = 8 mm min

The above approval mark ... under approval number 052439. The approval number ... as amended by the 05 series of amendments.

Model B

(See paragraph 4.5. of this Regulation)

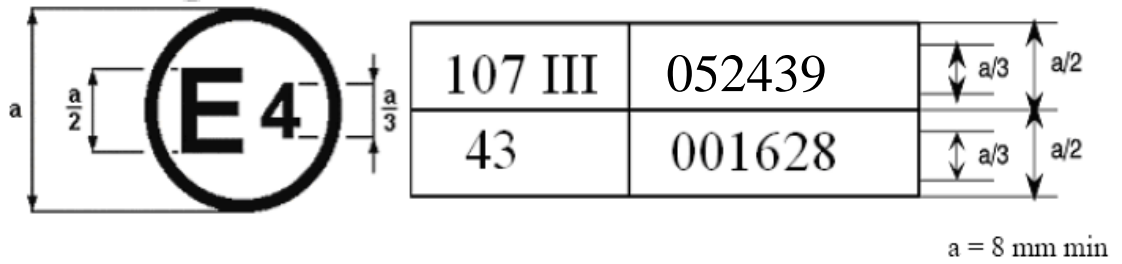

The above approval mark ... Regulation No. 107 included the 05 series of amendments and Regulation No. 43 was in its original form.

Model C

(See paragraph 4.4.3. of this Regulation)



The above ... pursuant to Regulation No. 107 under approval number 052439. The approval number indicates ... as amended by the 05 series of amendments."

Annex 3,

Insert new paragraphs 7.5.6. to 7.5.6.3., to read:

"7.5.6. Fire Detection.

7.5.6.1. Vehicles shall be equipped with an alarm system detecting either an excess temperature or smoke in toilet compartments, driver's sleeping compartments and other separate compartments.

7.5.6.2. Upon detection, the system given in paragraph 7.5.6.1. shall provide the driver with both an acoustic and a visual signal in the driver's compartment.

7.5.6.3. The alarm system shall be at least operational whenever the engine start device is operated, until such time as the engine stop device is operated, regardless of the vehicle's attitude."