

29 January 2007

## **AGREEMENT**

### **CONCERNING THE ADOPTION OF UNIFORM TECHNICAL PRESCRIPTIONS FOR WHEELED VEHICLES, EQUIPMENT AND PARTS WHICH CAN BE FITTED AND/OR BE USED ON WHEELED VEHICLES AND THE CONDITIONS FOR RECIPROCAL RECOGNITION OF APPROVALS GRANTED ON THE BASIS OF THESE PRESCRIPTIONS \*/**

(Revision 2, including the amendments which entered into force on 16 October 1995)

---

#### **Addendum 96: Regulation No. 97**

#### **Revision 1**

##### **Incorporating all valid text up to:**

Supplement 1 to the original version of the Regulation - Date of entry into force: 2 October 1997  
Corrigendum 1 to the original version of the Regulation, subject of Depository Notification  
C.N.45.1998.TREATIES-26 dated 6 March 1998  
Corrigendum 1 to Supplement 1 to the original version of the Regulation, subject of Depository Notification  
C.N.603.2002.TREATIES-2 dated 13 June 2002  
Erratum to the original version of the Regulation (French only)  
01 series of amendments - Date of entry into force: 13 January 2000  
Supplement 1 to the 01 series of amendments - Date of entry into force: 12 September 2001  
Supplement 2 to the 01 series of amendments - Date of entry into force: 5 December 2001  
Corrigendum 1 to Supplement 2 to the 01 series of amendments, subject of Depository Notification  
C.N.604.2002.TREATIES-3 dated 13 June 2002  
Supplement 3 to the 01 series of amendments - Date of entry into force: 12 August 2002  
Supplement 4 to the 01 series of amendments - Date of entry into force: 10 October 2006

### **UNIFORM PROVISIONS CONCERNING THE APPROVAL OF VEHICLE ALARM SYSTEMS (VAS) AND OF MOTOR VEHICLES WITH REGARD TO THEIR ALARM SYSTEMS (AS)**



**UNITED NATIONS**

---

\*/ Former title of the Agreement:

Agreement Concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts, done at Geneva on 20 March 1958.

GE.07-



Regulation No. 97

UNIFORM PROVISIONS CONCERNING THE APPROVAL OF VEHICLE ALARM  
SYSTEMS (VAS) AND OF MOTOR VEHICLES WITH REGARD  
TO THEIR ALARM SYSTEMS (AS)

CONTENTS

REGULATION	<u>Page</u>
1. Scope .....	7
Part I - Approval of vehicle alarm systems	
2. Definitions .....	7
3. Application for approval of VAS .....	8
4. Approval .....	9
5. General specifications .....	10
6. Particular specifications .....	12
7. Operation parameters and test conditions .....	17
8. Instructions .....	22
9. Modification of the VAS type and extension of approval .....	23
10. Conformity of production .....	23
11. Penalties for non-conformity of production .....	24
12. Production definitely discontinued .....	24
13. Names and addresses of Technical Services responsible for conducting approval tests, and of Administrative Departments .....	24

CONTENTS (continued)

Part II - Approval of a vehicle with regard to its alarm system

14. Definitions .....	25
15. Application for approval .....	25
16. Approval .....	26
17. General specifications .....	28
18. Particular specifications .....	29
19. Test conditions .....	34
20. Instructions .....	34
21. Modification of the vehicle type and extension of approval .....	34
22. Conformity of production .....	35
23. Penalties for non-conformity of production .....	35
24. Production definitely discontinued .....	35
25. Names and addresses of Technical Services responsible for conducting approval tests, and of Administrative Departments .....	35

Part III - Approval of immobilizers and approval of a vehicle with regard to its immobilizer

26. Definitions .....	36
27. Application for approval of an immobilizer .....	37
28. Application for approval of a vehicle .....	37
29. Approval of an immobilizer .....	38
30. Approval of a vehicle .....	40
31. General specifications .....	42

CONTENTS (continued)

32. Particular specifications .....	43
33. Operation parameters and test conditions .....	45
34. Instructions .....	46
35. Modifications of the immobilizer type or vehicle type and extension of approval .....	47
36. Conformity of production .....	47
37. Penalties for non-conformity of production .....	48
38. Production definitely discontinued .....	48
39. Transitional provisions .....	48
40. Names and addresses of Technical Services responsible for conducting approval tests, and of Administrative Departments .....	49

ANNEXES

- Annex 1 - Communication concerning the approval or extension or refusal or withdrawal of approval or production definitely discontinued of a type of vehicle alarm system (VAS) pursuant to Part I of Regulation No. 97
- Annex 2 - Communication concerning the approval or extension or refusal or withdrawal of approval or production definitely discontinued of a vehicle type with regard to its alarm system pursuant to Part II of Regulation No. 97
- Annex 3 - Communication concerning the approval or extension or refusal or withdrawal of approval or production definitely discontinued of a type of immobilizer pursuant to Part III of Regulation No. 97
- Annex 4 - Communication concerning the approval or extension or refusal or withdrawal of approval or production definitely discontinued of a vehicle type with regard to its immobilizer pursuant to Part III of Regulation No. 97
- Annex 5 - Arrangements of approval marks

CONTENTS (continued)

Annex 6 - Model of certificate of conformity

Annex 7 - Model of installation certificate

Annex 8 - Test of systems for the protection of the passenger compartment

Annex 9 - Electromagnetic compatibility

Annex 10 - Specifications for mechanical key switches

1. SCOPE

This Regulation applies to:

- 1.1. PART 1: Vehicle alarm systems (VAS) which are intended to be permanently fitted to vehicles of category M<sub>1</sub> and those of category N<sub>1</sub> with a maximum mass of not more than 2 tonnes. \*/
- 1.2. PART II: Vehicles of category M<sub>1</sub>, and those of category N<sub>1</sub> with a maximum mass of not more than 2 tonnes, with regard to their alarm system(s) (AS). \*/
- 1.3. PART III: Immobilizers and vehicles of category M<sub>1</sub> and vehicles of category N<sub>1</sub> with a maximum mass of not more than 2 tonnes with regard to immobilizers. \*/

PART I - APPROVAL OF VEHICLE ALARM SYSTEMS

2. DEFINITIONS

For the purpose of Part I of this Regulation,

- 2.1. "Vehicle alarm system" (VAS) means a system intended for installation on (a) type(s) of vehicle(s), designed to indicate intrusion into or interference with the vehicle; these systems may provide additional protection against unauthorized use of the vehicle;
- 2.2. "Sensor" means a device which senses a change which could be caused by intrusion into or interference with a vehicle;
- 2.3. "Warning device" means a device indicating that intrusion into or interference has occurred;
- 2.4. "Control equipment" means equipment necessary for the setting, unsetting and testing of a VAS and for sending an alarm condition to warning devices;
- 2.5. "Set" means the state of a VAS in which an alarm condition can be transmitted to warning devices;
- 2.6. "Unset" means the state of a VAS in which an alarm condition cannot be transmitted to warning devices;

---

\*/ Only vehicles with 12 volts electrical systems are considered.

- 2.7. "Key" means any device designed and constructed to provide a method of operating a locking system which is designed and constructed to be operated only by that device;
- 2.8. "Type of vehicle alarm system" means systems which do not differ significantly in such essential aspects as:
- (a) the manufacturer's trade name or mark,
  - (b) the kind of sensor,
  - (c) the kind of warning device,
  - (d) the kind of control equipment;
- 2.9. "Approval of a vehicle alarm system" means the approval of a type of VAS with respect to the requirements laid down in paragraphs 5., 6. and 7. below;
- 2.10. "Immobilizer" means a device which is intended to prevent the vehicle being driven away powered by its own engine;
- 2.11. "Panic Alarm" means a device which enables a person to use an alarm, installed on the vehicle, to summon assistance in an emergency.

### 3. APPLICATION FOR APPROVAL OF VAS

- 3.1. The application for approval of a VAS shall be submitted by the manufacturer of the VAS or by his duly accredited representative.
- 3.2. For each type of VAS the application must be accompanied by:
- 3.2.1. Documentation in triplicate giving a description of the technical characteristics of the VAS and the method of its installation;
  - 3.2.2. Three samples of the type of VAS with all its components. Each of the main components must be clearly and indelibly marked with the applicant's trade name or mark and the type designation of that component;
  - 3.2.3. (A) vehicle(s) fitted with the VAS to be type-approved, chosen by the applicant in agreement with the Technical Service responsible for conducting approval tests;
  - 3.2.4. Instructions in triplicate in accordance with paragraph 8. below.



#### 4. APPROVAL

- 4.1. If the VAS submitted for approval pursuant to this Regulation meets the requirements of paragraphs 5., 6. and 7. below, approval of that type of VAS shall be granted.
- 4.2. An approval number shall be assigned to each type approved. Its first two digits (currently 01 for the 01 series of amendments) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party may not assign the same number to another type of VAS.
- 4.3. Notice of approval or of extension or of refusal of approval of a type of VAS pursuant to this Regulation shall be communicated to the Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 1 to this Regulation.
- 4.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to the main component(s) of the VAS conforming to a type of VAS approved under this Regulation, an international approval mark consisting of :
- 4.4.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted approval 1/;

---

1/ 1 for Germany, 2 for France, 3 for Italy, 4 for the Netherlands, 5 for Sweden, 6 for Belgium, 7 for Hungary, 8 for the Czech Republic, 9 for Spain, 10 for Serbia, 11 for the United Kingdom, 12 for Austria, 13 for Luxembourg, 14 for Switzerland, 15 (vacant), 16 for Norway, 17 for Finland, 18 for Denmark, 19 for Romania, 20 for Poland, 21 for Portugal, 22 for the Russian Federation, 23 for Greece, 24 for Ireland, 25 for Croatia, 26 for Slovenia, 27 for Slovakia, 28 for Belarus, 29 for Estonia, 30 (vacant), 31 for Bosnia and Herzegovina, 32 for Latvia, 33 (vacant), 34 for Bulgaria, 35 (vacant), 36 for Lithuania, 37 for Turkey, 38 (vacant), 39 for Azerbaijan, 40 for The former Yugoslav Republic of Macedonia, 41 (vacant), 42 for the European Community (Approvals are granted by its Member States using their respective ECE symbol), 43 for Japan, 44 (vacant), 45 for Australia, 46 for Ukraine, 47 for South Africa, 48 for New Zealand, 49 for Cyprus, 50 for Malta, 51 for the Republic of Korea, 52 for Malaysia and 53 for Thailand. Subsequent numbers shall be assigned to other countries in the chronological order in which they ratify or accede to the Agreement Concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions, and the numbers thus assigned shall be communicated by the Secretary-General of the United Nations to the Contracting Parties to the Agreement.

- 4.4.2. The number of this Regulation, followed by the letter "R", a symbol "A" or "I" or "AI" indicating if the system is a vehicle alarm system or an immobilizer or a combination of both, a dash and the approval number in the vicinity of the circle prescribed in paragraph 4.4.1.
- 4.4.3. The approval mark shall be clearly legible and indelible.
- 4.4.4. Annex 5 to this Regulation gives examples of arrangements of approval marks.
- 4.5. As an alternative to the approval mark described in paragraph 4.4. above, a certificate of conformity shall be issued for every VAS offered for sale.

Where a VAS manufacturer supplies an approved unmarked VAS to a vehicle manufacturer, for fitment by that manufacturer as original equipment for a vehicle model or range of vehicle models, the VAS manufacturer shall supply a number of copies of the certificate of conformity to the vehicle manufacturer, sufficient for that manufacturer to obtain the vehicle approval to Part II of this Regulation.

If the VAS is made up of separate components, its main component(s) shall bear a reference mark and the certificate of conformity shall provide a list of such reference marks.

A model of the certificate of conformity is given in Annex 6 to this Regulation.

## 5. GENERAL SPECIFICATIONS

- 5.1. VAS shall, in the event of intrusion into or interference with a vehicle, provide a warning signal.

The warning signal shall be audible and in addition may include optical warning devices, or be a radio alarm or any combination of the above.

- 5.2. VASs shall be designed, constructed and installed in such a way that the vehicle when equipped shall continue to comply with the relevant technical requirements, especially with regard to electromagnetic compatibility (EMC).

- 5.3. If the VAS includes the possibility of a radio transmission, e.g. for setting or unsetting of the alarm or for alarm transmission, it shall comply with the relevant ETSI Standards 2/, e.g. EN 300 220-1 V1.3.1. (2000-09), EN 300 220-2 V1.3.1. (2000-09), EN 300 220-3 V1.1.1. (2000-09) and EN 301 489-3 V1.2.1. (2000-08) (including any advisory requirements). The frequency and maximum radiated power of radio transmissions for the setting and unsetting of the alarm system must comply with the CEPT/ERC 3/ Recommendation 70-03 (17 February 2000) relating to the use of short range devices. 4/
- 5.4. The installation of a VAS in a vehicle shall not be capable of influencing the vehicle's performance (in the unset state), or its safe operation.
- 5.5. The VAS and components thereof shall not activate inadvertently, particularly whilst the engine is in its running mode.
- 5.6. Failure of the VAS, or failure of its electrical supply shall not affect the safe operation of the vehicle.
- 5.7. The VAS, its components and the parts controlled by them shall be designed, built and installed in such a way as to minimize the risk for anyone to make them inoperable or to destroy them rapidly and without calling attention, e.g. using low-cost, easily-concealed tools, equipment or fabrications readily available to the public at large.
- 5.8. The means of setting and unsetting of the VAS shall be designed in such a way that it does not invalidate the requirements of Regulation No. 18. Electrical connections to components covered by this Regulation are allowed.
- 5.9. The system shall be so arranged that the shorting out of any warning signal circuit shall not render inoperative any aspects of the alarm system, other than the circuit which is shorted out.
- 5.10. VAS may include an immobilizer which shall comply with the requirements of Part III of this Regulation.

---

2/ ETSI: European Telecommunications Standards Institute.

If these Standards are not available when this Regulation comes into force, then the relevant domestic requirements shall apply.

3/ CEPT: Conference of European Posts and Telecommunications  
ERC: European Radio communications Committee

4/ Contracting Parties may prohibit the frequency and/or the power and may permit the use of other frequency and/or power.

## 6. PARTICULAR SPECIFICATIONS

### 6.1. Protection range

#### 6.1.1. Specific requirements

The VAS shall at least detect and signal the opening of any vehicle door, engine bonnet and luggage compartment. The failure or switching off of light sources, e.g. passenger compartment light, shall not impair the control operation.

Additional efficient sensors for information/display, e.g.:

- (a) of intrusions into the vehicle, e.g. passenger compartment control, window glass control, breakage of any glazed area, or
- (b) of attempted vehicle theft, e.g. inclination sensor

are allowed, taking account of measures to prevent any unnecessary sounding of the alarm (= false alarm, see paragraph 6.1.2. below).

Insofar as these additional sensors generate an alarm signal even after an intrusion has occurred (e.g. by breakage of a glazed area) or under external influences (e.g. wind), the alarm signal, activated by one of the above-mentioned sensors, shall be activated not more than 10 times within the same activation period of the VAS.

In this case the activation period shall be limited by the authorized unsetting of the system as a result of the vehicle user's action.

Some kinds of additional sensors, e.g. passenger compartment control (ultrasonic, infrared) or inclination sensor, etc., may be intentionally deactivated. In this case, separate deliberate action must be taken each time before the VAS is set. It must not be possible to deactivate the sensors while the alarm system is in a set state.

#### 6.1.2. Safety against false alarm.

##### 6.1.2.1. By adequate measures, e.g.:

- (a) mechanical design and design of the electrical circuit according to conditions specific to motor vehicles,
- (b) selection and application of operation and control principles for the alarm system and components thereof,

it shall be ensured that the VAS both in set and unset conditions, cannot cause the alarm signal to sound unnecessarily, in the event of:

- (a) an impact on the vehicle: test specified in paragraph 7.2.13.;
- (b) electromagnetic compatibility: tests specified in paragraph 7.2.12.;
- (c) reduction of battery voltage by continuous discharge: test specified in paragraph 7.2.14.;
- (d) false alarm of the passenger compartment control: test specified in paragraph 7.2.15.

6.1.2.2. If the applicant for approval can demonstrate, e.g. by technical data, that safety against false alarm is satisfactorily ensured, the Technical Service responsible for conducting approval tests may not require some of the above tests.

## 6.2. Audible alarm

### 6.2.1. General

The warning signal shall be clearly audible and recognizable and shall differ significantly from the other audible signals used in road traffic.

In addition to the original equipment audible warning device, a separate audible warning device may be fitted in the area of the vehicle which is controlled by the VAS, where it shall be protected against easy, rapid access by persons.

If a separate audible warning device according to paragraph 6.2.3.1. below is used, the original equipment standard audible warning device may additionally be actuated by the VAS, provided that any tampering with the standard audible warning device (generally more easily accessible) does not affect the operation of the additional audible warning device.

### 6.2.2. Duration of the audible signal

Minimum: 25 s  
Maximum: 30 s.

The audible signal may sound again only after the next interference with the vehicle, i.e. after the above-mentioned time span.  
(Restrictions: see paragraphs 6.1.1. and 6.1.2. above).

Unsetting of the alarm system shall immediately cut the signal.

6.2.3. Specifications concerning the audible signal.

6.2.3.1. Constant tone signal device (constant frequency spectrum), e.g. horns: acoustical, etc., data according to Regulation No. 28, Part I.

Intermittent signal (on/off):

Trigger frequency ..... (2 ± 1) Hz

On time = off time ± 10 per cent

6.2.3.2. Audible signal device with frequency modulation :  
acoustical, etc., data according to Regulation No. 28, Part I but equal passage of a significant frequency range within the above-mentioned range (1,800 through 3,550 Hz) in both directions.

Passage frequency ..... (2 ± 1) Hz

6.2.3.3. Sound level

The sound source shall be:

- (a) either an audible warning device approved under Regulation No. 28, Part I
- (b) or a device meeting the requirements of Regulation No. 28, Part I, paragraphs 6.1. and 6.2.

However, in the case of a different sound source from the original equipment audible warning device, the minimum sound level may be reduced to 100 dB(A), measured under the conditions of Regulation No. 28, Part I.

6.3. Optical alarm - if fitted

6.3.1. General

In the event of intrusion into or interference with the vehicle, the device shall activate an optical signal as specified in paragraphs 6.3.2. and 6.3.3. below.

6.3.2. Duration of the optical signal

The optical signal shall have a duration between 25 s and 5 min. after the alarm has been activated.

The unsetting of the alarm system shall immediately stop the signal.

6.3.3. Type of optical signal

Flashing of all direction indicators and/or passenger compartment light of the vehicle, including all lamps in the same electrical circuit.

Trigger frequency ..... (2 ± 1) Hz

In relation to the audible signal, also asynchronous signals are allowed.

On time = off time ± 10 per cent

6.4. Radio alarm (pager) - if fitted

The VAS may include a facility generating an alarm signal by radio transmission.

6.5. Alarm system setting lock

6.5.1. When the engine is in its running mode, deliberate or inadvertent setting of the alarm system shall be impossible.

6.6. Setting and unsetting of the VAS

6.6.1. Setting

Any suitable means of setting of the VAS is allowed, provided that such means does not inadvertently cause false alarms.

6.6.2. Unsetting

Unsetting of the VAS shall be achieved by one or a combination of the following devices. Other devices giving an equivalent performance are permitted.

6.6.2.1. A mechanical key (complying with the requirements of Annex 10 to this Regulation) which can be coupled with a centralized vehicle locking system comprising at least 1,000 variants, operated from the outside.

6.6.2.2. Electrical/electronic device, e.g. remote control, with at least 50,000 variants and shall incorporate rolling codes and/or have a minimum scan time of ten days, e.g. a maximum of 5,000 variants per 24 hours for 50,000 variants minimum.

6.6.2.3. A mechanical key or an electrical/electronic device within the protected passenger compartment, with timed exit/entry delay.

6.7. Exit delay

If the switching device for setting the VAS is fitted within the protected area, an exit delay shall be provided. It shall be possible for the exit delay to be set to between 15 seconds and 45 seconds after the switch has been operated. The delay period may be adjustable to suit individual operators' circumstances.

6.8. Entry delay

If the device for unsetting the VAS is fitted within the protected area, a delay of 5 seconds minimum and 15 seconds maximum shall be allowed before the activation of the audible and optical signals. The delay period may be adjustable to suit individual operators' circumstances.

6.9. Status display

6.9.1. To provide information on the status of the VAS (set, unset, alarm setting period, alarm has been activated), optical displays inside and outside the passenger compartment are allowed. The light intensity of optical signals installed outside the passenger compartment shall not exceed 0.5 cd.

6.9.2. If an indication of short-term "dynamic" processes such as changes from "set" to "unset" and vice versa is provided, it shall be optical, according to paragraph 6.9.1. Such optical indication may also be produced by the simultaneous operation of the direction indicators and/or passenger compartment lamp(s), provided that the duration of the optical indication by the direction indicators does not exceed 3 seconds.

6.10. Power supply

The source of power for the VAS shall either be the vehicle battery or a rechargeable battery. Where provided, an additional rechargeable or non-rechargeable battery may be used. These batteries shall by no means supply energy to other parts of the vehicle electrical system.

6.11. Specifications for optional functions

6.11.1. Self check, automatic failure indication

On setting the VAS, irregular situations, e.g. open doors, etc., can be detected by a self-check function (plausibility control), and this situation is indicated.



6.11.2. Panic alarm

An optical and/or audible and/or radio alarm is allowed independent of the state (set or unset) and/or function of the VAS. Such an alarm shall be triggered from within the vehicle and shall not affect the state (set or unset) of the VAS. Also it must be possible for the vehicle user to switch off the panic alarm. In the case of an audible alarm, its sounding duration per activation shall not be restricted. A panic alarm shall not immobilize the engine or stop it if it is running.

7. OPERATION PARAMETERS AND TEST CONDITIONS 5/

7.1. Operation parameters

All components of the VAS shall operate without any failure under the following conditions:

7.1.1. Climatic conditions

Two classes of environmental temperature are defined as follows :

- 40 °C to +85 °C for parts to be fitted in the passenger or luggage compartment;
- 40 °C to +125 °C for parts to be fitted in the engine compartment unless otherwise specified.

7.1.2. Degree of protection for installation

The following degrees of protection in accordance with IEC Publication 529-1989 shall be provided:

IP 40 for parts to be fitted in the passenger compartment;

IP 42 for parts to be fitted in the passenger compartment of roadsters/convertibles and cars with moveable roof-panels if the installation location requires a higher degree of protection than IP 40;

IP 54 for all other parts.

---

5/ Lamps which are used as part of the optical warning devices and which are included in the standard car lighting system need not comply with the operation parameters in paragraph 7.1. and shall not be submitted to tests listed under paragraph 7.2.

The VAS manufacturer shall specify in the installation instructions any restrictions on the positioning of any part of the installation with respect to dust, water and temperature.

7.1.3. Weatherability

7 days according to IEC 68-2-30-1980.

7.1.4. Electrical conditions

Rated supply voltage: 12 V

Operation supply voltage range: from 9 V to 15 V in the temperature range according to paragraph 7.1.1.

Time allowance for excess voltages at 23 °C: U = 18 V, max. 1 h  
 U = 24 V, max. 1 min.

7.2. Test conditions

7.2.1. Operation tests

7.2.1.1. Compliance of the VAS with the following specifications shall be checked:

- (a) Alarm duration according to paragraphs 6.2.2. and 6.3.2.;
- (b) Frequency and on/off ratio according to paragraphs 6.3.3. and 6.2.3.1. or 6.2.3.2. respectively;
- (c) Number of alarm cycles according to paragraph 6.1.1., if applicable;
- (d) Alarm system setting lock check according to paragraph 6.5.

7.2.1.2. Normal test conditions

Voltage ..... U = (12 ± 0.2) V  
 Temperature ..... Θ = (23 ± 5) °C

7.2.2. Resistance to temperature and voltage changes

Compliance with the specifications defined under paragraph 7.2.1.1. shall also be checked under the following conditions :

7.2.2.1.	Test temperature	Θ	=	(-40 ± 2) °C
	Test voltage	U	=	(9 ± 0.2) V
	Storage duration	4 hours		

7.2.2.2. For parts to be fitted in the passenger or luggage compartment:

Test temperature	Θ	=	(+85 ± 2) °C
Test voltage	U	=	(15 ± 0.2) V
Storage duration	4 hours		

7.2.2.3. For parts to be fitted in the engine compartment unless otherwise specified:

Test temperature	Θ	=	(+125 ± 2) °C
Test voltage	U	=	(15 ± 0.2) V
Storage duration	4 hours		

7.2.2.4. The VAS, in both set and unset state, shall be submitted to an excess voltage equal to (18 ± 0.2) V for 1 hour.

7.2.2.5. The VAS, in both set and unset state, shall be submitted to an excess voltage equal to (24 ± 0.2) V for 1 minute.

7.2.3. Safe operation after foreign body and water-tightness testing

After the test for tightness to foreign body and water according to IEC 529-1989, for degrees of protection as in paragraph 7.1.2., the operation tests according to paragraph 7.2.1. shall be repeated.

7.2.4. Safe operation after condensed water test

After a resistance-to-humidity test to be carried out according to IEC 68-2-30 (1980), the operation tests according to paragraph 7.2.1. shall be repeated.

7.2.5. Test for safety against reversed polarity

The VAS and components thereof shall not be destroyed by reversed polarity up to 13 V during 2 minutes.

After this test, the operation tests according to paragraph 7.2.1. shall be repeated with fuses changed, if necessary.

7.2.6. Test for safety against short-circuits

All electrical connections of the VAS must be short-circuit proof against earth, maximum 13 V and/or fused.

After this test, the operation tests according to paragraph 7.2.1. shall be repeated, with fuses changed if necessary.

7.2.7. Energy consumption in the set condition

The energy consumption in set condition under the conditions given in paragraph 7.2.1.2. shall not exceed 20 mA in average for the complete alarm system including status display.

7.2.8. Safe operation after vibration test

7.2.8.1. For this test, the components are subdivided into two types:

Type 1: components normally mounted on the vehicle;  
Type 2: components intended for attachment to the engine.

7.2.8.2. The components/VAS shall be submitted to a sinusoidal vibration mode whose characteristics are as follows:

7.2.8.2.1. For type 1

The frequency shall be variable from 10 Hz to 500 Hz with a maximum amplitude of  $\pm 5$  mm and maximum acceleration of 3 g (0-peak).

7.2.8.2.2. For type 2

The frequency shall be variable from 20 Hz to 300 Hz with a maximum amplitude of  $\pm 2$  mm and maximum acceleration of 15 g (0-peak).

7.2.8.2.3. For both type 1 and type 2:

- (a) the frequency variation is 1 octave/min;
- (b) the number of cycles is 10, the test shall be performed along each of the 3 axes;
- (c) the vibrations are applied at low frequencies at a maximum constant amplitude and at a maximum constant acceleration at high frequencies.

7.2.8.3. During the test, the VAS shall be electrically connected and the cable shall be supported after 200 mm.

7.2.8.4. After the vibration test, the operation tests according to paragraph 7.2.1. shall be repeated.

7.2.9. Durability test

Under the test conditions specified in paragraph 7.2.1.2., triggering of 300 complete alarm cycles (audible and/or optical) with a rest time of the audible device of 5 min.

7.2.10. Tests for external key switch (installed on the outside of the vehicle)

The following tests shall only be performed if the locking cylinder of the original equipment door lock is not used.

7.2.10.1. The key switch shall be so designed and constructed that it remains fully effective even after 2,500 set/unset cycles in each direction, followed by 96 hours minimum of exposure to salt spray test according to IEC 68-2-11-1981, corrosion resistance test.

7.2.11. Test of systems for the protection of the passenger compartment

The alarm shall be activated, when a vertical panel of 0.2 x 0.15 m is inserted for 0.3 m (measured from the centre of the vertical panel) through an open front door window into the passenger compartment, towards the front and parallel to the road at a speed of 0.4 m/s and at an angle of 45° with the longitudinal median plane of the vehicle. (See drawings in Annex 8 to this Regulation).

7.2.12. Electromagnetic compatibility

The VAS shall be submitted to the tests described in Annex 9.

7.2.13. Safety against false alarm in the event of an impact on the vehicle

It shall be verified that an impact of up to 4.5 Joules of a hemispherical body with 165 mm in diameter and 70 ± 10 Shore A applied anywhere to the vehicle bodywork or glazing with its curved surface does not cause false alarms.

7.2.14. Safety against false alarm in the event of a voltage reduction

It shall be verified that slow reduction of the main battery voltage by continuous discharge of 0.5 V per hour down to 3 V does not cause false alarms.

Test conditions: see paragraph 7.2.1.2. above.

7.2.15. Test for safety against false alarm of the passenger compartment control

Systems intended for the protection of the passenger compartment according to paragraph 6.1.1. above shall be tested together with a vehicle under normal conditions (para. 7.2.1.2.).

The system, installed according to the manufacturer's instructions, shall not be triggered when subjected 5 times to the test described in paragraph 7.2.13. above at intervals of 0.5 s.

The presence of a person touching or moving around the outside of the vehicle (windows closed) shall not cause any false alarm.

## 8. INSTRUCTIONS

Each VAS shall be accompanied by:

### 8.1. Instructions for installation:

8.1.1. The list of vehicles and vehicle models for which the device is intended. This list may be specific or generic, e.g. "all cars with petrol engines and 12 V negative earth batteries".

8.1.2. The method of installation illustrated by photographs and/or very clear drawings.

8.1.3. In the case of VAS which includes an immobilizer, additional instructions regarding compliance with the requirements of Part III of this Regulation.

8.2. A blank installation certificate, an example of which is given in Annex 7.

8.3. A general statement to the VAS purchaser calling his attention to the following points:

The VAS should be installed in accordance with the manufacturer's instructions;

The selection of a good installer is recommended (the VAS manufacturer may be contacted to indicate appropriate installers);

The installation certificate supplied with the VAS should be completed by the installer.

8.4. Instructions for use

8.5. Instructions for maintenance

8.6. A general warning regarding the danger of making any alterations or additions to the system; such alterations or additions would automatically invalidate the certificate of installation referred to in paragraph 8.2. above.

- 8.7. Indication of the location(s) of the international approval mark mentioned in paragraph 4.4. of this Regulation and/or the international certificate of conformity mentioned in paragraph 4.5. of this Regulation.

9. MODIFICATION OF THE VAS TYPE AND EXTENSION OF APPROVAL

Every modification of the VAS type shall be notified to the Administrative Department which approved this type of VAS.

The department may then either:

- (a) consider that the modifications made are unlikely to have an appreciable adverse effect and that in any case the VAS still complies with the requirements; or
- (b) require a further test report for some or all the tests described in paragraphs 5., 6. and 7. of this Regulation from the Technical Service responsible for conducting the tests.

Confirmation or refusal of approval, specifying the alteration, shall be communicated by the procedure specified in paragraph 4.3. above to the Contracting Parties to the Agreement applying this Regulation.

The Competent Authority issuing the extension of approval shall assign a serial number to each communication form drawn up for such an extension.

10. CONFORMITY OF PRODUCTION

The conformity of production procedures shall comply with those set out in the Agreement, Appendix 2 (E/ECE/324-E/ECE/TRANS/505/Rev.2), with the following requirements:

- 10.1. Every vehicle alarm system approved under this Regulation shall be so manufactured as to conform to the type approved by meeting the requirements set out in paragraphs 5., 6. and 7. above.
- 10.2. For each type of vehicle alarm system, the tests prescribed in paragraphs 7.2.1. to 7.2.10. of this Regulation shall be carried out on a statistically controlled and random basis, in accordance with one of the regular quality assurance procedures.
- 10.3. The authority which has granted approval may at any time verify the conformity control methods applied in each production facility. The normal frequency of these verifications shall be one every two years.

11. PENALTIES FOR NON-CONFORMITY OF PRODUCTION

11.1. The approval granted in respect of a type of VAS pursuant to this Regulation may be withdrawn if the requirements laid down in paragraph 10. above are not complied with.

11.2. If a Contracting Party to the Agreement applying this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation, by means of a form conforming to the model in Annex 1 to this Regulation.

12. PRODUCTION DEFINITELY DISCONTINUED

If the holder of the approval completely ceases to manufacture a type of VAS approved in accordance with this Regulation, he shall so inform the authority which granted the approval.

Upon receiving the relevant communication, that authority shall inform thereof the other Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 1 to this Regulation.

13. NAMES AND ADDRESSES OF TECHNICAL SERVICES RESPONSIBLE FOR CONDUCTING APPROVAL TESTS, AND OF ADMINISTRATIVE DEPARTMENTS

The Contracting Parties to the Agreement applying this Regulation shall communicate to the United Nations Secretariat the names and addresses of the Technical Services responsible for conducting approval tests and of the Administrative Departments which grant approval and to which forms certifying approval or extension or refusal or withdrawal of approval, issued in other countries are to be sent.



## PART II - APPROVAL OF A VEHICLE WITH REGARD TO ITS ALARM SYSTEM

When a VAS approved to Part I of this Regulation is being used in a vehicle submitted for approval to Part II of this Regulation, tests required to be passed by a VAS in order to obtain approval to Part I of this Regulation shall not be repeated.

### 14. DEFINITIONS

For the purpose of Part II of this Regulation,

- 14.1. "Alarm system(s)" (AS) means an arrangement of components fitted as original equipment in a vehicle type, designed to indicate intrusion into or interference with the vehicle; these systems may provide additional protection against unauthorized use of the vehicle.
- 14.2. "Vehicle type with regard to its alarm system" means vehicles which do not differ significantly in such essential aspects as:
- (a) the manufacturer's trade name or mark;
  - (b) vehicle features which significantly influence the performances of the AS;
  - (c) the type and design of the AS or VAS.
- 14.3. "Approval of a vehicle" means the approval of a vehicle type with regard to the requirements laid down in paragraphs 17., 18. and 19. below.
- 14.4. Other definitions applicable to Part II are contained in paragraph 2. of this Regulation.
- ### 15. APPLICATION FOR APPROVAL
- 15.1. The application for approval of a vehicle type with regard to its AS shall be submitted by the vehicle manufacturer or by his duly accredited representative.
- 15.2. It shall be accompanied by the under-mentioned documents in triplicate and by the following particulars:
- 15.2.1. A detailed description of the vehicle type and of the vehicle parts related to the AS installed.
  - 15.2.2. A list of components necessary to identify ASs which can be installed on the vehicle.
  - 15.2.3. When a VAS approved to Part I of this Regulation is being used, the type-approval communication of the VASs shall also be supplied to the Technical Service.

15.3. A vehicle representative of the type to be approved shall be submitted to the Technical Service.

15.4. A vehicle not comprising all the components proper to the type may be accepted provided that it can be shown by the applicant to the satisfaction of the Competent Authority that the absence of the components omitted has no effect on the results of the verifications, so far as the requirements of this Regulation are concerned.

## 16. APPROVAL

16.1. If the vehicle submitted for approval pursuant to this Regulation meets the requirements of paragraphs 17., 18. and 19. below, approval of that vehicle type shall be granted.

16.2. An approval number shall be assigned to each type approved. Its first two digits (currently 01 for the 01 series of amendments) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party may not assign the same number to another vehicle type.

16.3. Notice of approval or of extension or of refusal of approval of a vehicle type pursuant to this Regulation shall be communicated to the Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 2 to this Regulation.

16.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle conforming to a vehicle type approved under this Regulation, an international approval mark consisting of:

- 16.4.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted approval 6;
- 16.4.2. The number of this Regulation, followed by the letter "R", a symbol "A" or "I" or "AI" indicating if the vehicle has been approved with regard to its alarm system or its immobilizers or a combination of both, a dash and the approval number to the right of the circle prescribed in paragraph 16.4.1.
- 16.5. If the vehicle conforms to a vehicle type approved under one or more other Regulations annexed to the Agreement, in the country which has granted approval under this Regulation, the symbol prescribed in paragraph 16.4.1. need not be repeated; in such a case the Regulation and approval numbers and the additional symbols of all the Regulations under which approval has been granted in the country which has granted approval under this Regulation shall be placed in vertical columns to the right of the symbol prescribed in paragraph 16.4.1.
- 16.6. The approval mark shall be clearly legible and indelible.
- 16.7. The approval mark shall be placed close to or on the vehicle data plate affixed by the manufacturer.
- 16.8. Annex 5 to this Regulation gives examples of arrangements of approval marks.

---

6/ 1 for Germany, 2 for France, 3 for Italy, 4 for the Netherlands, 5 for Sweden, 6 for Belgium, 7 for Hungary, 8 for the Czech Republic, 9 for Spain, 10 for Serbia, 11 for the United Kingdom, 12 for Austria, 13 for Luxembourg, 14 for Switzerland, 15 (vacant), 16 for Norway, 17 for Finland, 18 for Denmark, 19 for Romania, 20 for Poland, 21 for Portugal, 22 for the Russian Federation, 23 for Greece, 24 for Ireland, 25 for Croatia, 26 for Slovenia, 27 for Slovakia, 28 for Belarus, 29 for Estonia, 30 (vacant), 31 for Bosnia and Herzegovina, 32 for Latvia, 33 (vacant), 34 for Bulgaria, 35 (vacant), 36 for Lithuania, 37 for Turkey, 38 (vacant), 39 for Azerbaijan, 40 for The former Yugoslav Republic of Macedonia, 41 (vacant), 42 for the European Community (Approvals are granted by its Member States using their respective ECE symbol), 43 for Japan, 44 (vacant), 45 for Australia, 46 for Ukraine, 47 for South Africa, 48 for New Zealand, 49 for Cyprus, 50 for Malta, 51 for the Republic of Korea, 52 for Malaysia and 53 for Thailand. Subsequent numbers shall be assigned to other countries in the chronological order in which they ratify or accede to the Agreement Concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions, and the numbers thus assigned shall be communicated by the Secretary-General of the United Nations to the Contracting Parties to the Agreement.

17. GENERAL SPECIFICATIONS

- 17.1. ASs shall be designed and built in such a way that they, in the event of intrusion into or interference with a vehicle, provide a warning signal, and may include an immobilizer.

The warning signal shall be audible and in addition may include optical warning devices, or be a radio alarm, or any combination of the above.

- 17.2. Vehicles which are equipped with alarm systems shall comply with the relevant technical requirements, especially with regard to electromagnetic compatibility (EMC).

- 17.3. If the AS includes the possibility of a radio transmission, e.g. for setting or unsetting of the alarm or for alarm transmission, it shall comply with the relevant ETSI Standards (see footnote 2/ pertinent to paragraph 5.3.), e.g. EN 300 220-1 V1.3.1. (2000-09), EN 300 220-2 V1.3.1. (2000-09), EN 300 220-3 V1.1.1. (2000-09) and EN 301 489-3 V1.2.1. (2000-08) (including any advisory requirements). The frequency and maximum radiated power of radio transmissions for the setting and unsetting of the alarm system must comply with the CEPT/ERC (see footnote 3/ pertinent to paragraph 5.3.) Recommendation 70-03 (17 February 2000) relating to the use of short range devices (see footnote 4/ to paragraph 5.3.).

- 17.4. The AS and components thereof shall not activate inadvertently, particularly whilst the engine is in its running mode.

- 17.5. Failure of the AS, or failure of its electrical supply shall not affect the safe operation of the vehicle.

- 17.6. The alarm system, its components and the parts controlled by them shall be so installed as to minimize the risk for anyone to make them inoperable or to destroy them rapidly and without calling attention, e.g. using low-cost, easily-concealed tools, equipment or fabrications readily available to the public at large.

- 17.7. The system shall be so arranged that the shorting out of any warning signal circuit shall not render inoperative any aspects of the alarm system, other than the circuit which is shorted out.

- 17.8. The AS may include an immobilizer which shall comply with the requirements of Part III of this Regulation.

18. PARTICULAR SPECIFICATIONS

18.1. Protection range

18.1.1. Specific requirements

The AS shall at least detect and signal the opening of any vehicle door, engine bonnet and luggage compartment. The failure or switching off of light sources, e.g. passenger compartment light, shall not impair the control operation.

The installation of additional efficient sensors for information/display, e.g.:

- (a) of intrusions into the vehicle, e.g. passenger compartment control, window glass control, breakage of any glazed area, or
- (b) of attempted vehicle theft, e.g. inclination sensor

are allowed, taking account of measures to prevent any unnecessary sounding of the alarm (= false alarm, see paragraph 18.1.2. below).

Insofar as these additional sensors generate an alarm signal even after an intrusion has occurred (e.g. by breakage of a glazed area) or under external influences (e.g. wind), the alarm signal, activated by one of the above-mentioned sensors, shall be activated not more than 10 times within the same activation period of the AS.

In this case the activation period shall be limited by the authorized unsetting of the system as a result of the vehicle user's action.

Some kinds of additional sensors, e.g. passenger compartment control (ultrasonic, infrared) or inclination sensor, etc., may be intentionally deactivated. In this case, separate deliberate action must be taken each time before the AS is set. It must not be possible to deactivate the sensors while the alarm system is in a set state.

18.1.2. Safety against false alarm.

18.1.2.1. It shall be ensured that the AS both in set and unset conditions, cannot cause the alarm signal to sound unnecessarily, in the event of:

- (a) an impact on the vehicle: test specified in paragraph 7.2.13.;
- (b) electromagnetic compatibility: tests specified in paragraph 7.2.12.;
- (c) reduction of battery voltage by continuous discharge: test specified in paragraph 7.2.14.;

(d) false alarm of the passenger compartment control: test specified in paragraph 7.2.15.

18.1.2.2. If the applicant for approval can demonstrate, e.g. by technical data, that safety against false alarm is satisfactorily ensured, the Technical Service responsible for conducting approval tests may not require some of the above tests.

## 18.2. Audible alarm

### 18.2.1. General

The warning signal shall be clearly audible and recognizable and shall differ significantly from the other audible signals used in road traffic.

In addition to the original equipment audible warning device, a separate audible warning device may be fitted in the area of the vehicle which is controlled by the AS, where it shall be protected against easy, rapid access by persons.

If a separate audible warning device according to paragraph 18.2.3.1. below is used, the original equipment standard audible warning device may additionally be actuated by the AS, provided that any tampering with the standard audible warning device (generally more accessible) does not affect the operation of the additional audible warning device.

### 18.2.2. Duration of the audible signal

Minimum: 25 s  
Maximum: 30 s.

The audible signal may sound again only after the next interference with the vehicle, i.e. after the above-mentioned time span.  
(Restrictions: see paragraphs 18.1.1. and 18.1.2. above).

Unsetting of the alarm system shall immediately cut the signal.

### 18.2.3. Specifications concerning the audible signal.

18.2.3.1. Constant tone signal device (constant frequency spectrum), e.g. horns: acoustical, etc., data according to Regulation No. 28, Part I.

Intermittent signal (on/off):

Trigger frequency ..... (2 ± 1) Hz

On time = off time ± 10 per cent

- 18.2.3.2. Audible signal device with frequency modulation: acoustical, etc., data according to Regulation No. 28, Part I but equal passage of a significant frequency range within the above-mentioned range (1,800 through 3,550 Hz) in both directions.

Passage frequency ..... (2 ± 1) Hz

- 18.2.3.3. Sound level

The sound source shall be:

- (a) either an audible warning device approved under ECE Regulation No. 28, Part I;
- (b) or a device meeting the requirements of ECE Regulation No. 28, Part I, paragraphs 6.1. and 6.2. However, in the case of a different sound source from the original equipment audible warning device, the minimum sound level may be reduced to 100 dB(A), measured under the conditions of ECE Regulation No. 28, Part I.

- 18.3. Optical alarm - if fitted

- 18.3.1. General

In the event of intrusion into or interference with the vehicle, the device shall activate an optical signal as specified in paragraphs 18.3.2. and 18.3.3. below.

- 18.3.2. Duration of the optical signal

The optical signal shall have a duration between 25 s and 5 min. after the alarm has been activated. The unsetting of the alarm system shall immediately stop the signal.

- 18.3.3. Type of optical signal

Flashing of all direction indicators and/or passenger compartment light of the vehicle, including all lamps in the same electrical circuit.

Trigger frequency ..... (2 ± 1) Hz

In relation to the audible signal, also asynchronous signals are allowed.

On time = off time  $\pm$  10 per cent

18.4. Radio alarm (pager) - if fitted

The AS may include a facility generating an alarm signal by radio transmission.

18.5. Alarm system setting lock

18.5.1. When the engine is in its running mode, deliberate or inadvertent setting of the alarm system shall be impossible.

18.6. Setting and unsetting of the AS

18.6.1. Setting

Any suitable means of setting of the AS is allowed, provided that such means does not inadvertently cause false alarms.

18.6.2 Unsetting

Unsetting of the AS shall be achieved by one or a combination of the following devices. Other devices giving equivalent performance are permitted.

18.6.2.1. A mechanical key (complying with the requirements of Annex 10 to this Regulation) which can be coupled with a centralized vehicle locking system comprising of at least 1,000 variants, operated from the outside.

18.6.2.2. Electrical/electronic device, e.g. remote control, with at least 50,000 variants and shall incorporate rolling codes and/or have a minimum scan time of ten days, e.g. a maximum of 5,000 variants per 24 hours for 50,000 variants minimum.

18.6.2.3. A mechanical key or an electrical/electronic device within the protected passenger compartment, with timed exit/entry delay.

18.7 Exit delay

If the switching device for setting the AS is fitted within the protected area, an exit delay shall be provided. It shall be possible for the exit delay to be set to between 15 seconds and 45 seconds after the switch has been operated. The delay period may be adjustable to suit individual operators' circumstances.



18.8. Entry delay

If the device for unsetting the VAS is fitted within the protected area, a delay of 5 seconds minimum and 15 seconds maximum shall be allowed before the activation of the audible and optical signals. The delay period may be adjustable to suit individual operators' circumstances.

18.9. Status display

18.9.1. To provide information on the status of the AS (set, unset, alarm setting period, alarm has been activated), the installation of optical displays is allowed inside and outside the passenger compartment. The light intensity of optical signals installed outside the passenger compartment shall not exceed 0.5 cd.

18.9.2. If an indication of short-term "dynamic" processes such as changes from "set" to "unset" and vice versa is provided, it shall be optical, according to paragraph 18.9.1. Such optical indication may also be produced by the simultaneous operation of the direction indicators and/or passenger compartment lamp(s), provided that the duration of the optical indication by the direction indicators does not exceed 3 seconds.

18.10. Power supply

The source of power for the AS shall either be the vehicle battery or a rechargeable battery. Where provided, an additional rechargeable or non-rechargeable battery may be used. These batteries shall by no means supply energy to other parts of the vehicle electrical system.

18.11. Specifications for optional functions

18.11.1. Self check, automatic failure indication

On setting the AS, irregular situations, e.g. open doors, etc., can be detected by a self-check function (plausibility control), and this situation is indicated.

18.11.2. Panic alarm

An optical and/or audible and/or radio alarm is allowed independent of the state (set or unset) and/or function of the AS. Such an alarm shall be triggered from within the vehicle and shall not affect the state (set or unset) of the AS. Also it must be possible for the vehicle user to switch off the panic alarm. In the case of an audible alarm, its sounding duration per activation shall not be restricted. A panic alarm shall not immobilize the engine or stop it if it is running.

19. TEST CONDITIONS

All components of the VAS or AS shall be tested in accordance with procedures described in paragraph 7.

This requirement does not apply to:

- 19.1. Those components that are fitted and tested as part of the vehicle, whether or not a VAS/AS is fitted (e.g. lamps); or,
- 19.2. Those components that have previously been tested as part of the vehicle and documentary evidence has been provided.

20. INSTRUCTIONS

Each vehicle shall be accompanied by:

- 20.1. Instructions for use;
- 20.2. Instructions for maintenance;
- 20.3. A general warning regarding the danger of making any alterations or additions to the system.

21. MODIFICATION OF THE VEHICLE TYPE AND EXTENSION OF APPROVAL

- 21.1. Every modification of the vehicle type shall be notified to the Administrative Department which approved the vehicle type.

The department may then either:

- 21.1.1. Consider that the modifications made are unlikely to have an appreciable adverse effect and that in any case the AS still complies with the requirements, or
- 21.1.2. Require a further report from the Technical Service.
- 21.2. Confirmation or refusal of approval, specifying the alteration, shall be communicated by the procedure specified in paragraph 16.3. above to the Contracting Parties to the Agreement applying this Regulation.
- 21.3. The Competent Authority issuing the extension of approval shall assign a serial number to each communication form drawn up for such an extension.

22. CONFORMITY OF PRODUCTION

The conformity of production procedures shall comply with those set out in the Agreement, Appendix 2 (E/ECE/324-E/ECE/TRANS/505/Rev.2), with the following requirements:

- 22.1. Every vehicle approved pursuant to this Regulation shall be so manufactured as to conform to the type approved by meeting the requirements set out in paragraphs 17., 18. and 19. above.
- 22.2. The authority which has granted approval may at any time verify the conformity control methods applied in each production facility. The normal frequency of these verifications shall be one every two years.

23. PENALTIES FOR NON-CONFORMITY OF PRODUCTION

- 23.1. The approval granted in respect of a vehicle type pursuant to this Regulation may be withdrawn if the requirements laid down in paragraph 22. above are not complied with.
- 23.2. If a Contracting Party to the Agreement applying this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation, by means of a form conforming to the model in Annex 2 to this Regulation.

24. PRODUCTION DEFINITELY DISCONTINUED

If the holder of the approval completely ceases to manufacture a vehicle type approved in accordance with this Regulation, he shall so inform the authority which granted the approval.

Upon receiving the relevant communication, that authority shall inform thereof the other Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 2 to this Regulation.

25. NAMES AND ADDRESSES OF TECHNICAL SERVICES RESPONSIBLE FOR CONDUCTING APPROVAL TESTS, AND OF ADMINISTRATIVE DEPARTMENTS

The Contracting Parties to the Agreement applying this Regulation shall communicate to the United Nations Secretariat the names and addresses of the Technical Services responsible for conducting approval tests and of the Administrative Departments which grant approval and to which forms certifying approval or extension or refusal or withdrawal of approval, issued in other countries are to be sent.

PART III - APPROVAL OF IMMOBILIZERS AND APPROVAL OF A VEHICLE  
WITH REGARD TO ITS IMMOBILIZER

26. DEFINITIONS

For the purpose of Part III of this Regulation:

- 26.1. "Immobilizer" means a device which is intended to prevent normal driving away of a vehicle under its own power (prevention of unauthorized use).
- 26.2. "Control equipment" means equipment necessary for the setting and/or unsetting of an immobilizer.
- 26.3. "Status display" means any device intended to indicate the status of the immobilizer (set/unset, change of set to unset and vice versa).
- 26.4. "Set state" means the state in which the vehicle cannot be driven normally under its own power.
- 26.5. "Unset state" means the state in which the vehicle can be driven normally.
- 26.6. "Key" means any device designed and constructed to provide a method of operating a locking system, which is designed and constructed to be operated only by that device.
- 26.7. "Override" means a design feature which locks the immobilizer in the unset condition.
- 26.8. "Rolling code" means an electronic code consisting of several elements the combination of which changes at random after each operation of the transmitting unit.
- 26.9. "Type of immobilizer" means systems which do not differ significantly in such essential aspects as:
- (a) the manufacturer's trade name or mark;
  - (b) the kind of control equipment;
  - (c) the design of their operation on the relevant vehicle system(s) (as referred to in paragraph 32.1. below).

26.10. "Vehicle type with regard to its immobilizer" means vehicles which do not differ significantly in such essential aspects as:

- (a) the manufacturer's trade name or mark;
- (b) vehicle features which significantly influence the performances of the immobilizer;
- (c) the type and design of the immobilizer.

## 27. APPLICATION FOR APPROVAL OF AN IMMOBILIZER

27.1. The application for approval of an immobilizer shall be submitted by the manufacturer of the immobilizer or by his duly accredited representative.

27.2. For each type of immobilizer the application must be accompanied by:

27.2.1. Documentation in triplicate giving a description of the technical characteristics of the immobilizer, the method of its installation, and the measure taken against inadvertent activation;

27.2.2. Three samples of the type of immobilizer with all its components. Each of the main components must be clearly and indelibly marked with the applicant's trade name or mark and the type designation of that component.

27.2.3. (A) vehicle(s) fitted with the immobilizer to be type-approved, chosen by the applicant in agreement with the Technical Service responsible for conducting approval tests.

27.2.4. Instructions in triplicate in accordance with paragraph 34. below.

## 28. APPLICATION FOR APPROVAL OF A VEHICLE

28.1. When an immobilizer approved to Part III of this Regulation is being used in a vehicle submitted for approval to Part III of this Regulation, tests required to be passed by an immobilizer in order to obtain vehicle approval to Part III of this Regulation shall not be repeated.

28.2. The application for approval of a vehicle type with regard to its immobilizers shall be submitted by the vehicle manufacturer or by his duly accredited representative.

28.3. It shall be accompanied by the under-mentioned documents in triplicate and by the following particulars:

28.3.1. A detailed description of the vehicle type and of the vehicle parts related to the immobilizer installed.

- 28.3.2. A list of components necessary to identify immobilizers which can be installed on the vehicle.
- 28.4. A vehicle representative of the type to be approved shall be submitted to the Technical Service.
- 28.5. A vehicle not comprising all the components proper to the type may be accepted provided that it can be shown, by the applicant to the satisfaction of the Competent Authority, that the absence of the components omitted has no effect on the results of the verifications, so far as the requirements of this Regulation are concerned.
- 28.6. When an immobilizer approved to Part III of this Regulation is being used, the type-approval communication of the immobilizers shall also be supplied to the Technical Service.
29. APPROVAL OF AN IMMOBILIZER
- 29.1. If the immobilizer submitted for approval pursuant to this Regulation meets the requirements of paragraphs 31., 32. and 33. below, approval of that type of immobilizer shall be granted.
- 29.2. An approval number shall be assigned to each type approved. Its first two digits (currently 01 for the 01 series of amendments) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party may not assign the same number to another type of immobilizer.
- 29.3. Notice of approval or of extension or of refusal of approval of a type of immobilizer pursuant to this Regulation shall be communicated to the Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 3 to this Regulation.
- 29.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to the main component(s) of the immobilizer conforming to a type of immobilizer approved under this Regulation, an international approval mark consisting of:

- 29.4.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted approval 7;
- 29.4.2. The number of this Regulation, followed by the letter "R", a symbol "A" or "I" or "AI" indicating if the system is a vehicle alarm system or an immobilizer or a combination of both, a dash and the approval number in the vicinity of the circle prescribed in paragraph 29.4.1.
- 29.5. The approval mark shall be clearly legible and indelible.
- 29.6. Annex 5 to this Regulation gives examples of arrangements of approval marks.
- 29.7. As an alternative to the approval mark described in paragraph 29.4. above, a certificate of conformity shall be issued for every immobilizer offered for sale.

Where an immobilizer manufacturer supplies an approved unmarked immobilizer to a vehicle manufacturer, for fitment by that manufacturer as original equipment for a vehicle model or range of vehicle models, the immobilizer manufacturer shall supply a number of copies of the certificate of conformity to the vehicle manufacturer, sufficient for that manufacturer to obtain the vehicle approval to paragraph 30. of this Regulation.

---

7/ 1 for Germany, 2 for France, 3 for Italy, 4 for the Netherlands, 5 for Sweden, 6 for Belgium, 7 for Hungary, 8 for the Czech Republic, 9 for Spain, 10 for Serbia, 11 for the United Kingdom, 12 for Austria, 13 for Luxembourg, 14 for Switzerland, 15 (vacant), 16 for Norway, 17 for Finland, 18 for Denmark, 19 for Romania, 20 for Poland, 21 for Portugal, 22 for the Russian Federation, 23 for Greece, 24 for Ireland, 25 for Croatia, 26 for Slovenia, 27 for Slovakia, 28 for Belarus, 29 for Estonia, 30 (vacant), 31 for Bosnia and Herzegovina, 32 for Latvia, 33 (vacant), 34 for Bulgaria, 35 (vacant), 36 for Lithuania, 37 for Turkey, 38 (vacant), 39 for Azerbaijan, 40 for The former Yugoslav Republic of Macedonia, 41 (vacant), 42 for the European Community (Approvals are granted by its Member States using their respective ECE symbol), 43 for Japan, 44 (vacant), 45 for Australia, 46 for Ukraine, 47 for South Africa, 48 for New Zealand, 49 for Cyprus, 50 for Malta, 51 for the Republic of Korea, 52 for Malaysia and 53 for Thailand. Subsequent numbers shall be assigned to other countries in the chronological order in which they ratify or accede to the Agreement Concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions, and the numbers thus assigned shall be communicated by the Secretary-General of the United Nations to the Contracting Parties to the Agreement.



If the immobilizer is made up of separate components, its main component(s) shall bear a reference mark and the certificate of conformity shall provide a list of such reference marks.

A model of the certificate of conformity is given in Annex 6 to this Regulation.

30. APPROVAL OF A VEHICLE

- 30.1. If the vehicle submitted for approval pursuant to this Regulation meets the requirements of paragraphs 31., 32., and 33. below, approval of that vehicle type shall be granted.
- 30.2. An approval number shall be assigned to each type approved. Its first two digits (currently 01 for the 01 series of amendments) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party may not assign the same number to another vehicle type.
- 30.3. Notice of approval or of extension or of refusal of approval of a vehicle type pursuant to this Regulation shall be communicated to the Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 4 to this Regulation.
- 30.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle conforming to a vehicle type approved under this Regulation, an international approval mark consisting of:

- 30.4.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted approval 8/;
- 30.4.2. The number of this Regulation, followed by the letter "R", a symbol "A" or "I" or "AI" indicating if the vehicle has been approved with regard to its alarm system or its immobilizers or a combination of both, a dash and the approval number to the right of the circle prescribed in paragraph 30.4.1.
- 30.5. If the vehicle conforms to a vehicle type approved under one or more other Regulations annexed to the Agreement, in the country which has granted approval under this Regulation, the symbol prescribed in paragraph 30.4.1. need not be repeated; in such a case the Regulation and approval numbers and the additional symbols of all the Regulations under which approval has been granted in the country which has granted approval under this Regulation shall be placed in vertical columns to the right of the symbol prescribed in paragraph 30.4.1.
- 30.6. The approval mark shall be clearly legible and indelible.
- 30.7. The approval mark shall be placed close to or on the vehicle data plate affixed by the manufacturer.
- 30.8. Annex 5 to this Regulation gives examples of arrangements of approval marks.

---

8/ 1 for Germany, 2 for France, 3 for Italy, 4 for the Netherlands, 5 for Sweden, 6 for Belgium, 7 for Hungary, 8 for the Czech Republic, 9 for Spain, 10 for Serbia, 11 for the United Kingdom, 12 for Austria, 13 for Luxembourg, 14 for Switzerland, 15 (vacant), 16 for Norway, 17 for Finland, 18 for Denmark, 19 for Romania, 20 for Poland, 21 for Portugal, 22 for the Russian Federation, 23 for Greece, 24 for Ireland, 25 for Croatia, 26 for Slovenia, 27 for Slovakia, 28 for Belarus, 29 for Estonia, 30 (vacant), 31 for Bosnia and Herzegovina, 32 for Latvia, 33 (vacant), 34 for Bulgaria, 35 (vacant), 36 for Lithuania, 37 for Turkey, 38 (vacant), 39 for Azerbaijan, 40 for The former Yugoslav Republic of Macedonia, 41 (vacant), 42 for the European Community (Approvals are granted by its Member States using their respective ECE symbol), 43 for Japan, 44 (vacant), 45 for Australia, 46 for Ukraine, 47 for South Africa, 48 for New Zealand, 49 for Cyprus, 50 for Malta, 51 for the Republic of Korea, 52 for Malaysia and 53 for Thailand. Subsequent numbers shall be assigned to other countries in the chronological order in which they ratify or accede to the Agreement Concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions, and the numbers thus assigned shall be communicated by the Secretary-General of the United Nations to the Contracting Parties to the Agreement.

31. GENERAL SPECIFICATIONS

- 31.1. It must be possible to set and unset the immobilizer in accordance with these requirements.
- 31.2. If the immobilizer includes the possibility of a radio transmission, e.g. for setting or unsetting, it shall comply with the relevant ETSI Standards (see footnote 2/ pertinent to paragraph 5.3.), e.g. EN 300 220-1 V1.3.1. (2000-09), EN 300 220-2 V1.3.1. (2000-09), EN 300 220-3 V1.1.1. (2000-09) and EN 301 489-3 V1.2.1. (2000-08) (including any advisory requirements). The frequency and maximum radiated power of radio transmissions for the setting and unsetting of the immobilizer must comply with the CEPT/ERC (see footnote 3/ pertinent to paragraph 5.3.) Recommendation 70-03 (17 February 2000) relating to the use of short range devices (see footnote 4/ to paragraph 5.3.).
- 31.3. An immobilizer and its installation shall be so designed that any equipped vehicle continues to meet the technical requirements.
- 31.4. It shall not be possible for an immobilizer to enter the set state when the ignition key is in the engine running mode, except when:
- (a) the vehicle is equipped or intended to be equipped for ambulance, fire brigade or police purposes; or
  - (b) the engine is required to:
    - (i) drive machinery forming part of, or mounted on, the vehicle for purposes other than driving the vehicle; or
    - (ii) maintain the electrical power of the batteries of the vehicle at a level required for driving that machinery or apparatus;
- and the vehicle is stationary with the parking brake applied. When this exception is used, this fact shall be stated under item 2 of the addendum to the communication document (Annex 2 to this Regulation).
- 31.5. It shall not be possible to permanently override an immobilizer.
- 31.6. The immobilizer shall be designed and built such that when installed it shall not adversely affect the designed function and the safe operation of the vehicle, even in the case of malfunction.
- 31.7. An immobilizer shall be designed and built such that, when installed on a vehicle, according to the manufacturer's instructions, it cannot rapidly and without attracting

attention be rendered ineffective or destroyed by, e.g. the use of low cost easily concealed tools, equipment or fabrications readily available to the public at large. It shall be difficult and time consuming to replace a major component or assembly in order to bypass the immobilizer.

- 31.8. An immobilizer shall be so designed and built such that when installed as specified by the manufacturer it is able to withstand the environment within the vehicle for a reasonable lifetime (for testing see paragraph 33.). More particularly the electrical properties of the on-board circuitry shall not be adversely affected by the addition of the immobilizer (lead cross-sections, contact safety, etc.).
- 31.9. An immobilizer may be combined with other vehicle systems or may be integrated into them (e.g. engine management, alarm systems).
- 31.10. It shall not be possible for an immobilizer to prevent the release of the brakes of the vehicle, except in the case of an immobilizer which prevents the release of pneumatically released spring brakes <sup>9/</sup> and functions in such a way that in normal operation, or in failure conditions, the technical requirements of Regulation No. 13 in force at the time of application for type approval under this Regulation are satisfied.

Compliance with this paragraph does not exempt an immobilizer which prevents the release of pneumatically released spring brakes from the technical requirements set out in this Regulation.

- 31.11. It shall not be possible for an immobilizer to operate in such a manner as to apply the brakes of the vehicle.

## 32. PARTICULAR SPECIFICATIONS

### 32.1. Extent of disablement

- 32.1.1. An immobilizer shall be designed so as to prevent the operation of the vehicle under its own power by at least one of the following means:

32.1.1.1. disable, in the case of after-market fitting, or vehicle equipped with diesel engine, at least two separate vehicle circuits that are needed for vehicle operation under its own power (e.g. starter motor, ignition, fuel supply, pneumatically released spring brakes, etc.);

32.1.1.2. interference by code of at least one control unit required for the operation of the vehicle;

---

<sup>9/</sup> As defined in Annex 8 of Regulation No. 13, as amended.

- 32.1.2. An immobilizer for fitment to a vehicle equipped with a catalytic converter shall not cause unburnt fuel to enter the exhaust.
- 32.2. Operating reliability
- Operating reliability shall be achieved by suitable design of the immobilizer, account being taken of specific environmental conditions in the vehicle (see paragraphs 31.8. and 33.).
- 32.3. Operating safety
- It shall be ensured that the immobilizer does not change its state (set/unset) as a result of any of the tests in paragraph 33.
- 32.4. Setting of the immobilizer
- 32.4.1. The immobilizer must be set without supplementary action from the driver by at least one of the following means:
- (a) at rotation of the ignition key into the "0" position in the ignition lock and activation of a door; in addition, immobilizers which unset immediately before or during the normal starting procedure of the vehicle are permitted to set on turning the ignition off.
  - (b) a maximum of 1 minute after removing the key of the ignition lock.
- 32.4.2. If the immobilizer can enter the set state when the ignition key is in the engine running mode as provided for in paragraph 31.4., the immobilizer may also be set by the opening of the driver's door and/or the authorised user carrying out a deliberate action.
- 32.5. Unsetting
- 32.5.1. Unsetting shall be achieved by using one or a combination of the following devices. Other devices with an equivalent level of security giving equivalent performance are permitted.
- 32.5.1.1. A key pad for inputting an individually selectable code having at least 10,000 variants.
- 32.5.1.2. Electrical/electronic device, e.g. remote control, with at least 50,000 variants and shall incorporate rolling codes and/or have a minimum scan time of ten days, e.g. a maximum of 5,000 variants per 24 hours for 50,000 variants minimum.

32.5.1.3. If unsetting can be achieved via a remote control, the immobilizer must return to the set condition within 5 minutes after unsetting if no supplementary action on the starter circuit has been undertaken.

32.6. Status display

32.6.1. To provide information on the status of the immobilizer (set/unset, change of set to unset and vice versa), optical displays inside and outside the passenger compartment are allowed. The light intensity of optical signals installed outside the passenger compartment shall not exceed 0.5 cd.

32.6.2. If an indication of short-term "dynamic" processes such as changes from "set" to "unset" and vice versa is provided, it shall be optical, according to paragraph 32.6.1. Such optical indication may also be produced by the simultaneous operation of the direction indicators and/or passenger compartment lamp(s), provided that the duration of the optical indication by the direction indicators does not exceed 3 seconds.

33. OPERATION PARAMETERS AND TEST CONDITIONS

33.1. Operation parameters

All components of the immobilizer shall comply with prescriptions given in paragraph 7. of this Regulation.

This requirement does not apply to:

those components that are fitted and tested as part of the vehicle, whether or not an immobilizer is fitted (e.g. lamps); or,

those components that have previously been tested as part of the vehicle and documentary evidence has been provided.

33.2. Test conditions

All the tests shall be carried out in sequence on a single immobilizer. However, at the discretion of the test authority, other samples may be used if this is not considered to affect the results of the other tests.

33.3. Operation test

Upon completion of all the tests specified below, the immobilizer shall be tested under the normal test conditions specified in paragraph 7.2.1.2. of this Regulation to

check that it continues to function normally. Where necessary, fuses may be replaced prior to the test.

All components of the immobilizer shall comply with prescriptions given in paragraphs 7.2.2. to 7.2.8. and 7.2.12. of this Regulation.

## 34. INSTRUCTIONS

(Paragraphs 34.1. to 34.3. for the purposes of aftermarket installation only).

Each immobilizer shall be accompanied by:

### 34.1. Instructions for installation

34.1.1. The list of vehicles and vehicle models for which the device is intended. This list may be specific or generic, e.g. "all cars with petrol engines and 12 V negative earth batteries".

34.1.2. The method of installation illustrated by photographs and/or very clear drawings.

34.1.3. Detailed installation instructions provided by the supplier shall be such that when correctly followed by a competent installer, the safety and reliability of the vehicle is not affected.

34.1.4. The supplied installation instructions shall identify the electrical power requirements of the immobilizer and, where relevant, shall advise an increasing of battery size.

34.1.5. The supplier shall provide post installation procedures for checking the vehicle. Particular attention shall be drawn to safety related features.

34.2. A blank installation certificate, an example of which is given in Annex 7.

34.3. A general statement to the immobilizer purchaser calling his attention to the following points:

34.3.1. the immobilizer should be installed in accordance with the manufacturer's instructions;

34.3.2. the selection of a good installer is recommended (the immobilizer manufacturer may be contacted to indicate appropriate installers);

34.3.3. the installation certificate supplied with the immobilizer should be completed by the installer.

- 34.4. Instructions for use
- 34.5. Instructions for maintenance
- 34.6. A general warning regarding the dangers of making any alterations or additions to the immobilizer; such alterations and additions would automatically invalidate the certificate of installation referred to in paragraph 34.2. above.

35. **MODIFICATION OF THE IMMOBILIZER TYPE OR VEHICLE TYPE AND EXTENSION OF APPROVAL**

Every modification of the immobilizer type or vehicle type shall be notified to the Administrative Department which approved this type of immobilizer.

The department may then either:

- (a) consider that the modifications made are unlikely to have an appreciable adverse effect and that in any case the immobilizer or vehicle still complies with the requirements; or
- (b) require a further test report for some or all of the tests described in paragraphs 31., 32. and 33. of this Regulation from the Technical Service responsible for conducting the tests.

Confirmation or refusal of approval, specifying the alteration, shall be communicated by the procedure specified in paragraph 29.3. above to the Contracting Parties to the Agreement applying this Regulation.

The Competent Authority issuing the extension of approval shall assign a serial number to each communication form drawn up for such an extension.

36. **CONFORMITY OF PRODUCTION**

The conformity of production procedures shall comply with those set out in the Agreement, Appendix 2 (E/ECE(324-E/ECE/TRANS/505/Rev.2), with the following requirements:

- 36.1. Every immobilizer or vehicle approved under this Regulation with regard to its immobilizer shall be so manufactured as to conform to the type approved by meeting the requirements set out in paragraphs 31., 32. and 33. above.
- 36.2. The authority which has granted approval may at any time verify the conformity control methods applied in each production facility. The normal frequency of these verifications shall be one every two years.



37. PENALTIES FOR NON-CONFORMITY OF PRODUCTION

37.1. The approval granted in respect of a type of immobilizer or a type of vehicle pursuant to this Regulation may be withdrawn if the requirements laid down in paragraph 36. above are not complied with.

37.2. If a Contracting Party to the Agreement applying this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation, by means of a form conforming to the models in Annex 3 and Annex 4 to this Regulation.

38. PRODUCTION DEFINITELY DISCONTINUED

If the holder of the approval completely ceases to manufacture a type of immobilizer or a type of vehicle approved in accordance with this Regulation, he shall so inform the authority which granted the approval.

Upon receiving the relevant communication, that authority shall inform thereof the other Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 4 to this Regulation.

39. TRANSITIONAL PROVISIONS

39.1. Type approval of an immobilizer

39.1.1. As from 36 months after the date of entry into force of Supplement 4 to the 01 series of amendments, Contracting Parties applying this Regulation shall grant approvals only if the type of component or separate technical unit to be approved meets the requirements of this Regulation as amended by Supplement 4 to the 01 series of amendments.

39.1.2. Contracting Parties applying this Regulation shall continue to grant approvals to those type of components or separate technical units which comply with the requirements of the original version of this Regulation, as amended by any previous series of amendments, provided that the component or separate technical unit is intended as a replacement for fitting on vehicles in use and that it would not be technically feasible to fit a component or separate technical unit which satisfies the requirements contained in this Regulation as amended by the Supplement 4 to the 01 series of amendments.

39.2. Approval of a vehicle type

39.2.1. As from the date 36 months after the date of entry into force of Supplement 4 to the 01 series of amendments, Contracting Parties applying this Regulation shall grant

approvals only if the vehicle type to be approved meets the requirements of this Regulation as amended by the Supplement 4 to the 01 series of amendments.

40. NAMES AND ADDRESSES OF TECHNICAL SERVICES RESPONSIBLE FOR CONDUCTING APPROVAL TESTS, AND OF ADMINISTRATIVE DEPARTMENTS

The Contracting Parties to the Agreement applying this Regulation shall communicate to the United Nations Secretariat the names and addresses of the Technical Services responsible for conducting approval tests and of the Administrative Departments which grant approval and to which forms certifying approval or extension or refusal or withdrawal of approval, issued in other countries are to be sent.

Annex 1

COMMUNICATION

(Maximum format: A4 (210 x 297 mm))



issued by :

Name of administration:

.....  
.....  
.....

concerning: 2/

APPROVAL GRANTED  
APPROVAL EXTENDED  
APPROVAL REFUSED  
APPROVAL WITHDRAWN  
PRODUCTION DEFINITELY DISCONTINUED

of a type of vehicle alarm system (VAS) pursuant to Part I of Regulation No. 97

Approval No.: .....

Extension No.: .....

1. Trade name or mark of the VAS: .....
2. Type of VAS: .....
3. Manufacturer's name and address: .....
4. If applicable, name and address of manufacturer's representative:  
.....
5. Brief description of the VAS and of the immobilizer (if applicable): .....
6. Type of vehicle on which the VAS has been tested: .....
7. System submitted for approval on: .....
8. Technical Service responsible for conducting approval tests: .....
9. Date of report issued by that service:.....

10. Number of report issued by that service: .....
11. Approval has been granted/refused/extended/withdrawn 2/
12. Reason(s) for extension of approval: .....  
.....
13. If applicable, position of the approval mark(s) on the main components: .....  
.....
14. Place: .....
15. Date: .....
16. Signature: .....
17. The following documents, bearing the approval number shown above, are attached to this communication:

list of components, duly identified, constituting the VAS;

list of files deposited with the Administrative Service which has granted type approval, and which can be obtained upon request.

---

1/ Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulation).

2/ Strike out what does not apply.

Annex 2

COMMUNICATION

(Maximum format: A4 (210 x 297 mm))



issued by :

Name of administration:

.....  
.....  
.....

concerning: 2/

- APPROVAL GRANTED
- APPROVAL EXTENDED
- APPROVAL REFUSED
- APPROVAL WITHDRAWN
- PRODUCTION DEFINITELY DISCONTINUED

of a vehicle type with regard to its alarm system pursuant to Part II of Regulation No. 97

Approval No.: .....

Extension No.: .....

1. Trade name or mark of the vehicle: .....
2. Vehicle type: .....
3. Manufacturer's name and address: .....
4. If applicable, name and address of manufacturer's representative:  
.....
5. Brief description: .....
6. Vehicle submitted for approval on: .....
7. Technical Service responsible for conducting approval tests: .....
8. Date of report issued by that service: .....
9. Number of report issued by that service: .....

- 10. Approval has been granted/refused/extended/withdrawn 2/
- 11. Reason (s) for extension of approval: .....  
.....
- 12. Position of the approval mark on the vehicle: .....
- 13. Place: .....
- 14. Date: .....
- 15. Signature: .....
- 16. The following documents, bearing the approval number shown above, are attached to this communication:

list of components, identifying alarm systems which can be installed on the vehicle type;

list of files deposited with the Administrative Service which has granted type approval, and which can be obtained upon request.

---

1/ Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulation).

2/ Strike out what does not apply.

Annex 3

COMMUNICATION

(Maximum format: A4 (210 x 297 mm))



issued by :

Name of administration:

.....  
.....  
.....

concerning: 2/

- APPROVAL GRANTED
- APPROVAL EXTENDED
- APPROVAL REFUSED
- APPROVAL WITHDRAWN
- PRODUCTION DEFINITELY DISCONTINUED

of a type of immobilizer pursuant to Part III of Regulation No. 97

Approval No.: .....

Extension No.: .....

1. Trade name or mark of the immobilizer:.....
2. Type of immobilizer: .....
3. Manufacturer's name and address:.....
4. If applicable, name and address of manufacturer's representative:  
.....
5. Brief description of the immobilizer: .....
6. Type of vehicle on which the immobilizer has been tested:.....
7. If applicable, type(s) of vehicle(s) to which the immobilizer is intended to be fitted:.....  
.....
8. System submitted for approval on:.....

9. Technical Service responsible for conducting approval tests:.....  
.....
10. Date of report issued by that service: .....
11. Number of report issued by that service: .....
12. Approval has been granted/extended/refused/withdrawn 2/
13. Reason (s) for extension of approval: .....
14. If applicable, position of the approval mark(s) on the main components: .....
15. Place:.....
16. Date:.....
17. Signature:.....
18. The following documents, bearing the approval number shown above, are attached to this communication:

list of components, duly identified, constituting the immobilizer;

list of files deposited with the Administrative Service which has granted type approval, and which can be obtained upon request.

---

1/ Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulation).

2/ Strike out what does not apply.



Annex 4

COMMUNICATION

(Maximum format: A4 (210 x 297 mm))



issued by :

Name of administration:

.....  
.....  
.....

concerning: 2/

- APPROVAL GRANTED
- APPROVAL EXTENDED
- APPROVAL REFUSED
- APPROVAL WITHDRAWN
- PRODUCTION DEFINITELY DISCONTINUED

of a vehicle type with regard to its immobilizer pursuant to Part III of Regulation No. 97

Approval No.: .....

Extension No.: .....

1. Trade name or mark of the vehicle:.....
2. Vehicle type:.....
3. Manufacturer's name and address:.....
4. If applicable, name and address of manufacturer's representative:  
.....
5. Brief description: .....
6. Vehicle submitted for approval on: .....
7. Technical Service responsible for conducting approval tests: .....
8. Date of report issued by that service: .....
9. Number of report issued by that service:.....

10. Approval has been granted/extended/refused/withdrawn 2/: .....
11. Reason (s) for extension of approval: .....  
.....
12. Position of the approval mark on the vehicle: .....
13. Place:.....
14. Date:.....
15. Signature:.....
16. The following documents, bearing the approval number shown above, are attached to this communication:

brief description of the immobilizer and the vehicle part(s) on which it (they) act(s);

list of files deposited with the Administrative Service which has granted type approval, and which can be obtained upon request.

---

1/ Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulation).

2/ Strike out what does not apply.

Annex 5

ARRANGEMENTS OF APPROVAL MARKS

Model A

Figure 1




Figure 2





Figure 3



a = 8 mm min.


The above approval mark figure 1 affixed to a vehicle or a VAS shows that the type concerned has been approved in the Netherlands (E 4), pursuant to Regulation No. 97 as amended by the 01 series of amendments under approval No. 011234.

The above approval mark figure 2 affixed to a vehicle or an immobilizer shows that the type concerned has been approved in the Netherlands (E 4), pursuant to Regulation No. 97 as amended by the 01 series of amendments under approval No. 011234.

The above approval mark figure 3 affixed to a vehicle or a VAS and an immobilizer shows that the type concerned has been approved in the Netherlands (E 4), pursuant to Regulation No. 97 as amended by the 01 series of amendments under approval No. 011234.

The first two digits of the approval number indicate that the approval was granted in accordance with the requirements of Regulation No. 97 as amended by the 01 series of amendments.

Model B

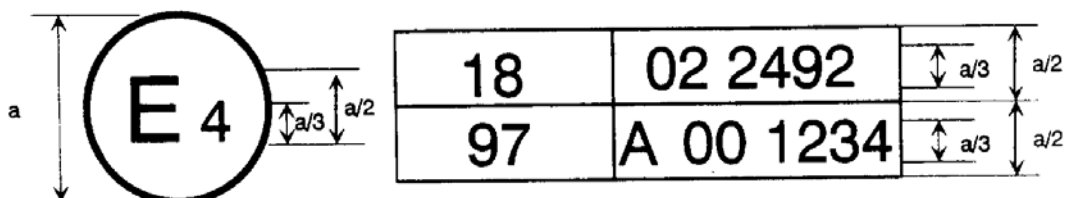

a = 8 mm min.

The above approval mark affixed to a vehicle shows that the type concerned has been approved with regard to its alarm system in the Netherlands (E 4) pursuant to Regulations Nos. 18 \*/ and 97.

The first two digits of the approval numbers indicate that, on the dates on which these approvals were granted, Regulation No. 18 included the 02 series of amendments and Regulation No. 97 included the 01 series of amendments.

---

\*/ The second number is given merely as an example.

Annex 6

MODEL OF CERTIFICATE OF CONFORMITY

I the undersigned .....  
(surname and name)

Testify that the vehicle alarm system/immobilizer 1/ below:

Make: .....

Type: .....

is in total conformity with the type approved

at ..... on .....  
(place of approval) (date)

as described in the communication form bearing approval No. ....

Identification of the main component(s):

Component: .....	Marking : .....
.....	.....
.....	.....

Done at : ..... on : .....

Manufacturer's full address and stamp: .....  
.....  
.....

Signature: .....(please specify position)

---

1/ Strike out what does not apply.

Annex 7

MODEL OF INSTALLATION CERTIFICATE

I the undersigned .....  
professional installer, certify that the installation of the vehicle alarm system described below  
has been carried out by myself pursuant to the mounting instructions supplied by the  
manufacturer of the system.

Description of the vehicle:

Make: .....

Type: .....

Serial number: .....

Registration number: .....

Description of the vehicle alarm system/immobilizer <sup>1/</sup>:

Make: .....

Type: .....

Approval number: .....

Done at: ..... on : .....

Installer's full address and stamp: .....  
.....  
.....

Signature: .....(please specify position)


---

<sup>1/</sup> Strike out what does not apply.

Annex 8

Paragraphs 7.2.11. and 19.

Test of systems for the protection of the passenger compartment

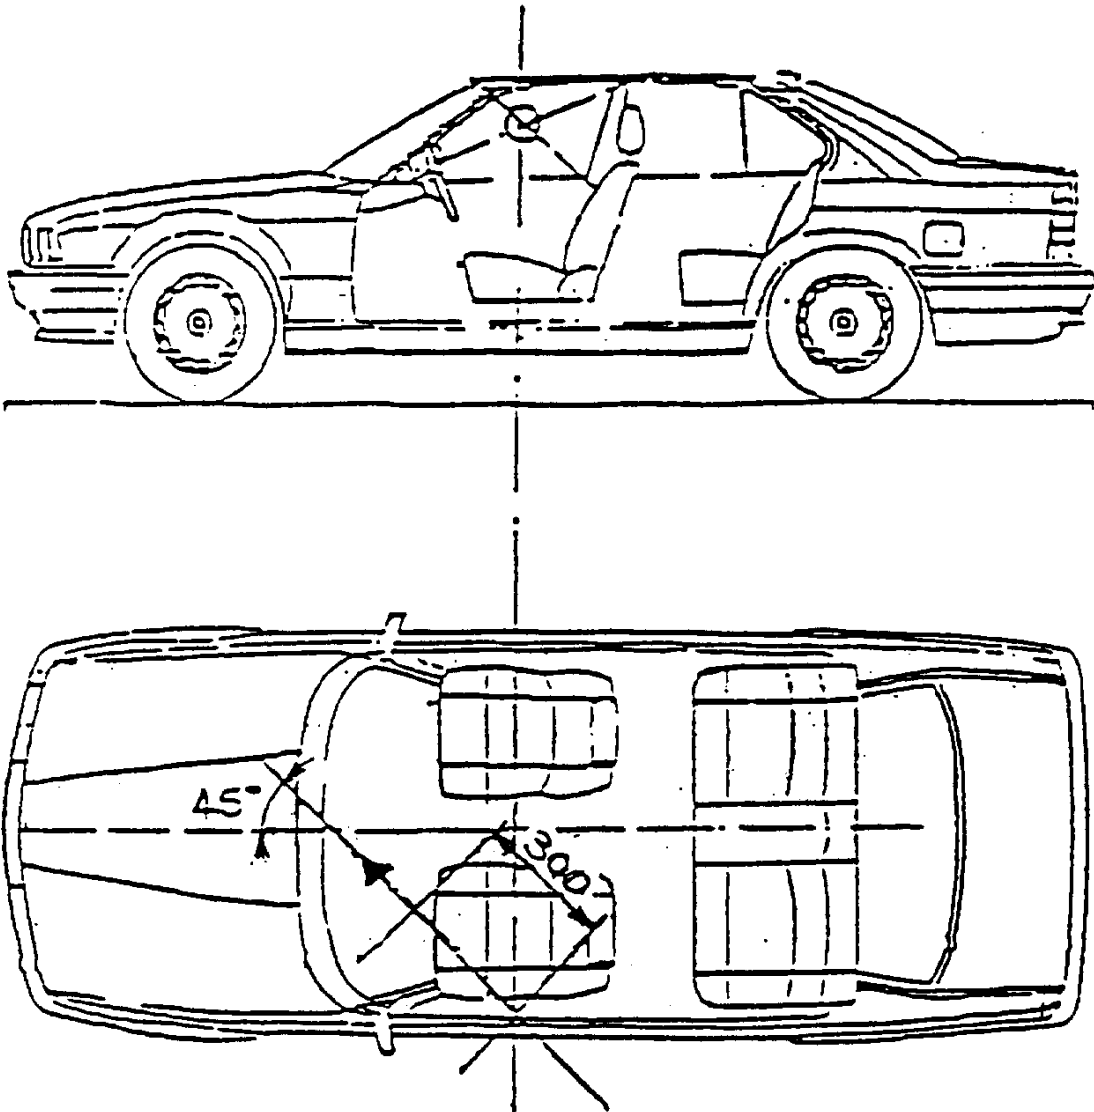

Annex 9

ELECTROMAGNETIC COMPATIBILITY

Note: To test the electromagnetic compatibility, either paragraph 1. or paragraph 2. shall be used, depending on the test facilities.

1. METHOD ISO

Immunity against disturbances conducted along supply lines

Apply the test pulses 1, 2, 3a, 3b, 4 and 5 according to the International Standard ISO 7637-1:1990 to the supply lines as well as to other connections of VAS/AS which may be operationally connected to supply lines.

VAS/AS in unset state

The test pulses 1 through 5 shall be applied with a degree of severity III. The required functional status for all applied test pulses shall be A.

VAS/AS in set state

The test pulses 1 through 5 shall be applied. The required functional status for all applied test pulses are given in table 1.

Table 1 - Severity/functional status (for supply lines)

Test pulse number	Test level	Functional status
1	III	C
2	III	A
3a	III	C
3b	III	A
4	III	B
4	I	A
5	III	A



### Immunity against disturbance coupled on signal lines

Leads which are not connected to supply lines (e.g. special signal lines) shall be tested in accordance with the International Standard ISO/DIS 7637:1993 part 3. The required functional status for all applied test pulses are given in table 2.

Table 2 - Test level / functional status (for signal lines)

Test pulse number	Test level	Functional status
3a	III	C
3b	III	A

### Immunity against radiated high frequency disturbances

Testing of the immunity of a VAS/AS in a vehicle may be performed according to the prescriptions in Regulation No. 10, 02 series of amendments and test methods described in Annex 6 for the vehicles and Annex 9 for a separate technical unit.

### Electrical disturbance from electrostatic discharges

Immunity against electrical disturbances shall be tested in accordance with Technical Report ISO/TR 10605-1993.

### Radiated emission

Tests shall be performed according to Regulation No. 10, 02 series of amendments prescriptions and according to the test methods described in Annexes 4 and 5 for vehicles or Annexes 7 and 8, for a separate technical unit.

## 2. METHOD IEC

### Electromagnetic field

The VAS/AS shall undergo the basic test. It shall be subjected to the electromagnetic field test described in IEC Publication 839-1-3-1998 test A-13 with a frequency range from 20 to 1,000 MHz, and for a field strength level of 30 V/m.

In addition, the VAS/AS shall be subjected to the electrical transient conducted and coupled tests described in the International Standard ISO 7637 Parts 1:1990, 2:1990 and 3:1993, as appropriate.

Electrical disturbance from electrostatic discharges

The VAS/AS shall undergo the basic test. It shall be subjected to testing for immunity against electrostatic discharge as described in either EN 61000-4-2, or ISO/TR 10605-1993, at the manufacturer's choice.

Radiated emissions

The VAS/AS shall be subjected to testing for the suppression of radio frequency interference according to tests prescribed in Regulation No. 10, 02 series of amendments and according to test methods described in Annexes 4 and 5 for vehicles and Annexes 7 and 8 for a separate technical unit.

Annex 10

SPECIFICATIONS FOR MECHANICAL KEY SWITCHES

1. The cylinder of the key switch shall not protrude by more than 1 mm from the cowling, and the protruding part shall be conical.
2. The joint between the cylinder core and the cylinder casing shall be capable of withstanding a tensile force of 600 N and a torque of 25 Nm.
3. The key switch shall be provided with a cylinder drill obstruction.
4. The key profile shall have at least 1,000 effective permutations.
5. The key switch shall not be operable by a key which differs by only one permutation from the key matching the key switch.
6. The key aperture to an external key switch shall be shuttered or otherwise protected against the penetration of dirt and/or water.

-----