

Sub-Committee of Experts
on the Globally Harmonized System of Classification
and Labelling of Chemicals
(Fourth session, 9-11 December 2002)


Proposed Amendments to Annex 6

Replace the examples in Annex 6 with the following (the secretariat should number these appropriately for easy reference):

Example: Combination Packaging for a Category 2 Flammable Liquid

Outer Packaging: Box with a flammable liquid transport label*

Inner Packaging: Plastic bottle with GHS hazard warning label**

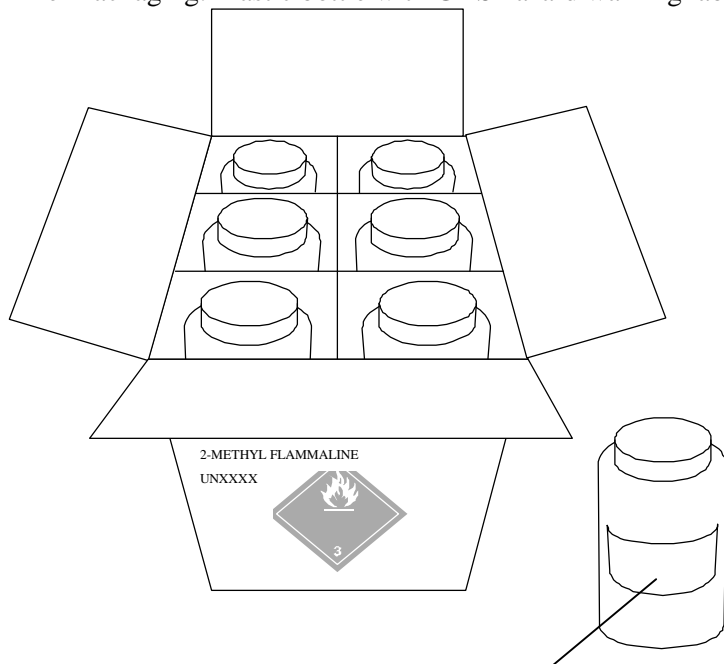

2-METHYL FLAMMALINE

UNXXXX
CAS# XXXX-XX-X



**

DANGER

Highly flammable liquid and vapour.
Keep away from heat and ignition sources.

First aid:

Obtain medical attention immediately if ingested.
Do not induce vomiting.

Akron Chemical Co., Akron, NWT, Canada.

Telephone (888) 888-8888


Note: * Only the UN transport markings and labels are required for outer packagings.

** A reduced size flammable liquid pictogram as specified in the UN Recommendations on the Transport of Dangerous Goods, Model Regulations may be used in place of the GHS pictogram shown on the inner packaging label.

Example: Combination Packaging for a Category 1 Target Organ/Systemic Toxicant and Category 2 Flammable Liquid

Outer Packaging: Box with a flammable liquid transport label*

Inner Packaging: Plastic bottle with GHS hazard warning label**

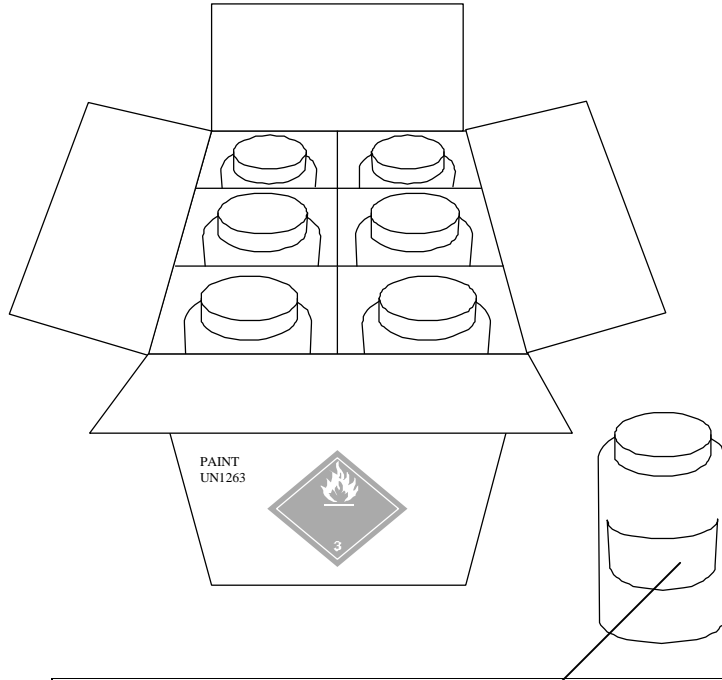


PAINT (FLAMMALINE, LEAD CHROMOMIUM)		UN1263 CAS# XXXX-XX-X
	<p style="text-align: right;">DANGER</p> <p>Highly flammable liquid and vapour. Keep away from heat and ignition sources.</p>	
	<p>Causes damage to the liver and kidneys through prolonged or repeated exposure to the skin. Keep away from food and drink. Wash hands thoroughly after use and before eating.</p>	
<p>First aid: Call emergency medical care. Wash affected area of body thoroughly with soap and fresh water.</p>		
<p>Great Lake Paints Inc., Columbus, Ohio, USA. Telephone 999 999 9999</p>		


Note: * Only the UN transport markings and labels are required for outer packagings.

** A reduced size flammable liquid pictogram as specified in the UN Recommendations on the Transport of Dangerous Goods, Model Regulations may be used in place of the GHS pictogram shown on the inner packaging label.


Example: Combination Packaging for a Category 2 Skin Irritant and Category 2A Eye Irritant

Outer Packaging: Box with no label required for transport
Inner Packaging: Plastic bottle with GHS hazard warning label

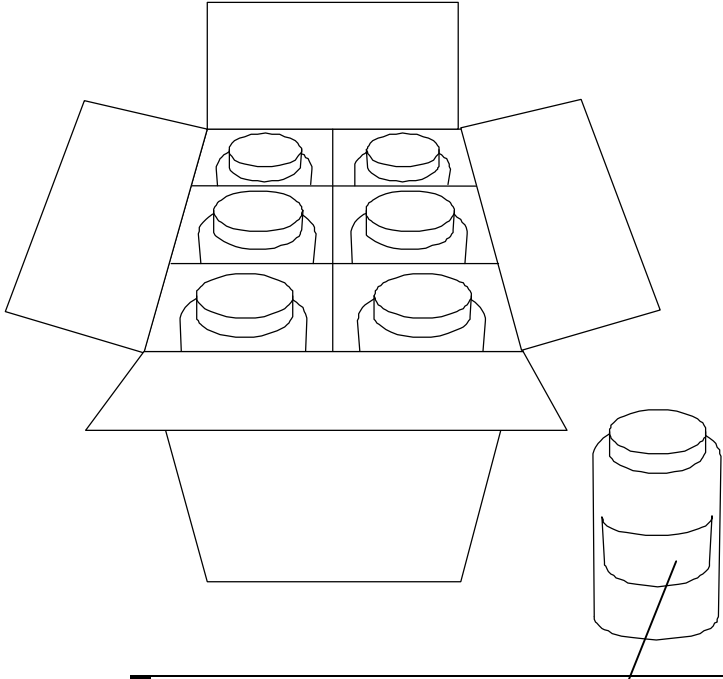

BLAHZENE SOLUTION		CAS# XXXX-XX-X
	WARNING Causes skin irritation. Causes serious eye irritation.	
First aid: Flush with fresh water if contact with skin or eyes. If irritation develops and persists, get medical attention. Great Lake Paints Inc., Columbus, Ohio, USA. Telephone 999 999 9999		


Example Single Packaging (200 liter drum) for a Category 2 Flammable Liquid

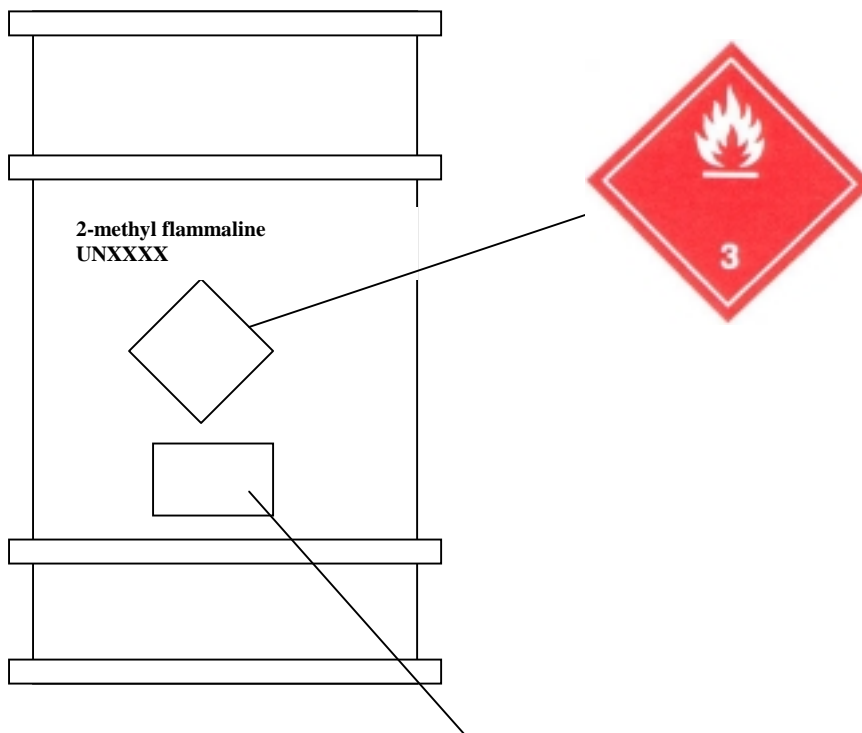


2-METHYL FLAMMALINE	UNXXXX CAS# XXXX-XX-X
DANGER Highly flammable liquid and vapour. Keep away from heat and ignition sources.	
First aid: Obtain medical attention immediately if ingested. Do not induce vomiting.	
GHS Example Company, Akron, NWT, Canada. Telephone (888) 888-8888	

Note: The GHS label and the flammable liquid pictogram and markings required by the UN Model Regulations may be presented in a combined format.


Example Single Packaging for a Category 1 Target Organ/Systemic Toxicant and Category 2 Flammable Liquid

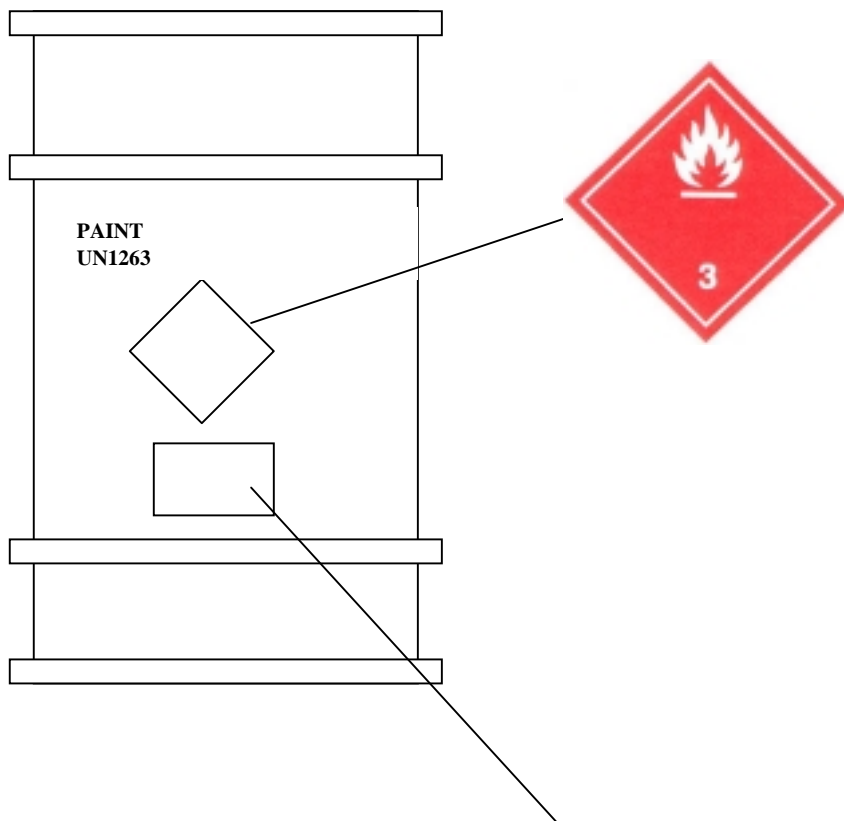

PAINT (METHYL FLAMMALINE, LEAD CHROMOMIUM)		UN1263 CAS# XXXX-XX-X
	DANGER Causes damage to the liver and kidneys through prolonged or repeated exposure to the skin. Keep away from food and drink. Wash hands thoroughly after use and before eating.	
	Highly flammable liquid and vapour. Keep away from heat and ignition sources.	
First aid: Call emergency medical care. Wash affected area of body thoroughly with soap and fresh water. Great Lake Paints Inc., Columbus, Ohio, USA. Telephone 999 999 9999		

Note: The GHS label and the flammable liquid pictogram and markings required by the UN Model Regulations may be presented in a combined format.

Example: Single Packaging for a Category 2 Skin Irritant and Category 2A Eye Irritant

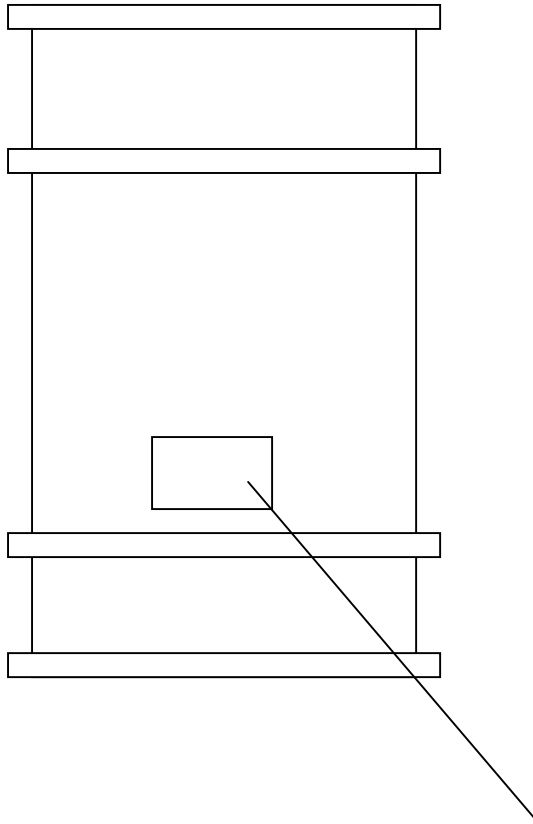

BLAHZENE SOLUTION

CAS# XXXX-XX-X



WARNING

Causes skin irritation.

Causes serious eye irritation.

First aid:

Flush with fresh water if contact with skin or eyes.

If irritation develops and persists, get medical attention.

Great Lake Paints Inc., Columbus, Ohio, USA. Telephone 999 999 9999