

**Proposal for draft amendments to document TRANS/WP.29/GRSG/2005/8
(Regulation No. 107)**

A. PROPOSAL

Annex 3, Paragraph 7.6.11.1., amend to read:

"7.6.11.1 Each emergency exit shall be marked, inside and outside the vehicle, by the following symbol. An additional symbol (e.g. arrow), indicating where to find the emergency exit, may be added.




Colour: green basis with white symbols
Size: at least 130 mm wide and 50 mm high

Reference for safety symbols: ISO 7010 :2003 (E)
Reference for the design principles of safety symbols: ISO 3864-1:2002(E)"

Annex 4, Figure 23, amend to read:

"Figure 23
Accessibility symbols
(see Annex 8, paragraph 3.4)

Pictogram for wheelchair users (Figure 23 A)

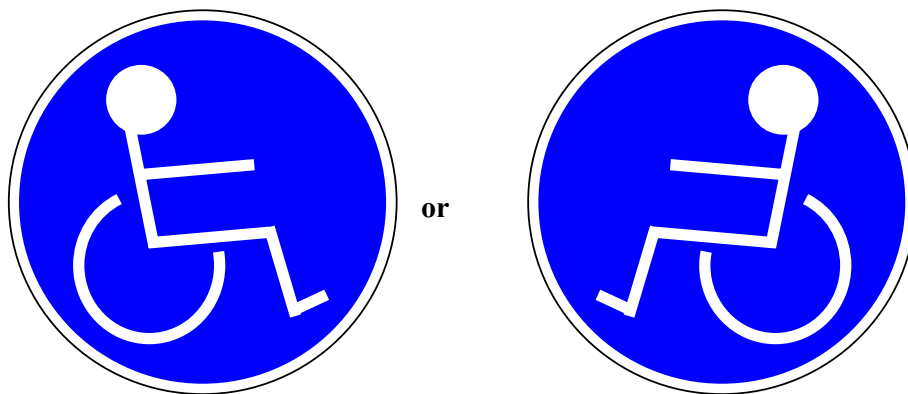

Colour: blue basis with white symbol
Size: at least 130 mm diameter

Reference for the design principles of safety symbols: ISO 3864-1:2002(E)

Pictogram for passengers with reduced mobility others than wheelchair users (Figure 23 B)



Colour: blue basis with white symbol
Size: at least 130 mm diameter

Reference for the design principles of safety symbols: ISO 3864-1:2002(E)"

B. JUSTIFICATION

Justification: As requested under item 17 of the report on the eighty-eight session, references to relevant ISO standards and a symmetric pictogram for the wheelchair sign have been introduced. Concerning the latter pictogram "or" was inserted to avoid misinterpretations as to being required to use both signs together.
