



Economic and Social Council

Distr.: General
17 January 2014

Original: English

Economic Commission for Europe

Inland Transport Committee

World Forum for Harmonization of Vehicle Regulations

Working Party on Lighting and Light-Signalling

Seventy-first session

Geneva, 31 March–3 April 2014

Item 12(d) of the provisional agenda

Other business – Any other business

Proposal for draft amendments to Regulation No. 70 (Rear-marking plates for heavy and long vehicles)

Submitted by the expert from the European Association of Automotive Suppliers*

The text reproduced below was prepared by the expert from the European Association of Automotive Suppliers (CLEPA). The modifications to the existing text of the Regulation are marked in bold for new and strikethrough for deleted characters.

* In accordance with the programme of work of the Inland Transport Committee for 2012–2016 (ECE/TRANS/224, para. 94 and ECE/TRANS/2012/12, programme activity 02.4), the World Forum will develop, harmonize and update Regulations in order to enhance the performance of vehicles. The present document is submitted in conformity with that mandate

I. Proposal

Paragraph 2.1.3., amend to read:

- "2.1.3. Classes of rear marking plates
- Class 1: Rear marking plates for heavy motor vehicles (trucks and tractors) with red fluorescent and yellow retro-reflective alternative stripes.
- Class 2: Rear marking plates for long vehicles (trailers and semi-trailers) with red fluorescent border and yellow retro-reflective centre.
- Class 3: Rear marking plates for heavy motor vehicles (trucks and tractors) with red retro-reflective and yellow retro-reflective alternative stripes.
- Class 4: Rear marking plates for long vehicles (trailers and semi-trailers) with red retro-reflective border and yellow retro-reflective centre.
- Class 5: Rear marking plates for motor vehicles or trailers with red and white retro-reflective alternative stripes."**

Annex 5,

Paragraph 2., amend to read:

"...

For mounting of Class 5 devices on non-articulated vehicles, the retro-reflective material shall be made with alternate, oblique stripes of white and red colour.

..."

Paragraph 3.2., amend to read:

"...

Class 5 devices shall incorporate a minimum of 9 standard areas as described in para. 3.4. below on large vehicles with available mounting space, but may be reduced to a minimum of 4 standard areas on vehicles with limited mounting space.

..."

Paragraph 3.4., amend to read:

"...

Class 5 retro-reflective materials shall consist of red and white diagonal stripes each 100 mm wide sloping outwards and downwards at 45°. The basic standard area is a square of 141 mm in length subdivided diagonally into a white half and red half, which represents one standard area.

Prescribed shapes, patterns and dimensional features of Class 5 devices are illustrated in figure 3 of Annex 12 to this Regulation.

..."

Paragraph 3.5., amend to read:

"Rear marking plates **or Class 5 devices** supplied in sets shall form matching pairs."

Annex 6,

Paragraph 2., amend the title, to read:

"Yellow, red **or white** retro-reflective material"

Paragraph 2.1.1., amend to read:

"Luminance factor for:

- (a) Yellow colour shall be ≥ 0.16 .
- (b) Red colour shall be ≥ 0.03 .
- (c) **White colour shall be ≥ 0.25 .**

Annex 7,

Paragraph 1.1., insert new table 3 after table 2 and amend to read:

"When illuminated with a CIE Standard Illuminant A and measured as recommended by CIE TC 2.3 (CIE Publication No. 54, 1982), the coefficient of retro-reflection R' in candelas per square metre per lux of the yellow, **white or red** retro-reflective area in new condition shall be at least as indicated in tables 1, 2 **or 3**, according to the class. Devices of class 1 and class 2 shall fulfil the values in table 1, devices of class 3 and class 4 those in table 2, **devices of class 5 those in table 3.**

...

Table 3
Coefficient of retro-reflection R' [$\text{cd}\cdot\text{m}^{-2}\cdot\text{lx}^{-1}$]

Observation angle α [°]	Entrance angle β [°]				
	β_1	0°	0°	0°	0°
20°	β_2	5°	30°	40°	60°
Coefficient R' [$\text{cd}\cdot\text{m}^{-2}\cdot\text{lx}^{-1}$]	Colour: White	450	200	90	16
	Red	120	30	10	2

Paragraph 1.3., Table 3, amend to read and renumber as table 4:

Table 4
Luminance factor β

Colour	Luminance factor β
Red	≥ 0.03
Yellow	≥ 0.16
White	≥ 0.25

Annex 12, insert a new title after Figure 2 and insert new Figure 3:

"Rear marking plates (Class 5)

Figure 3a


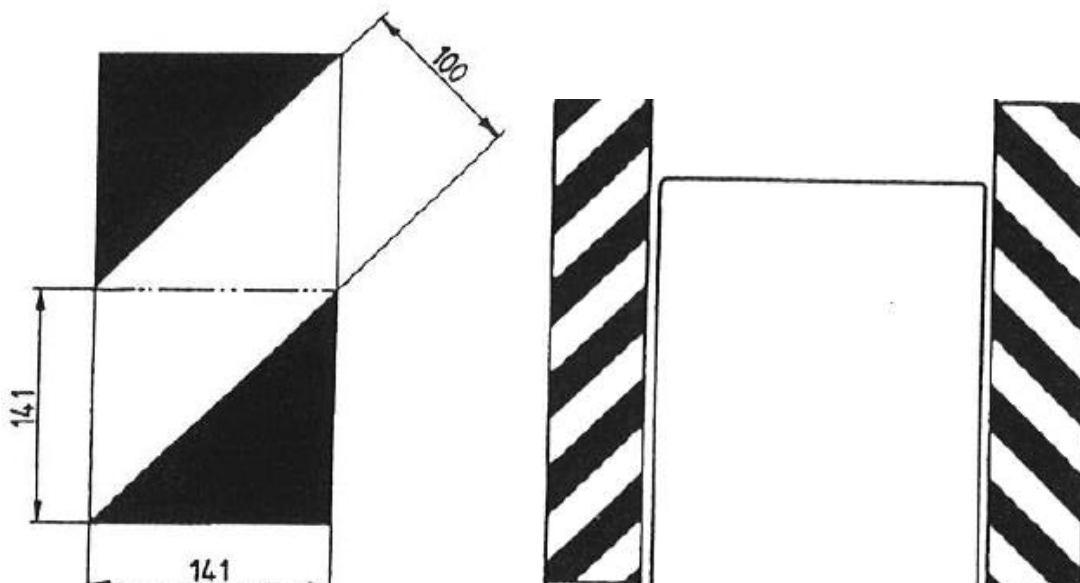


Figure 3b
Example for a plate design

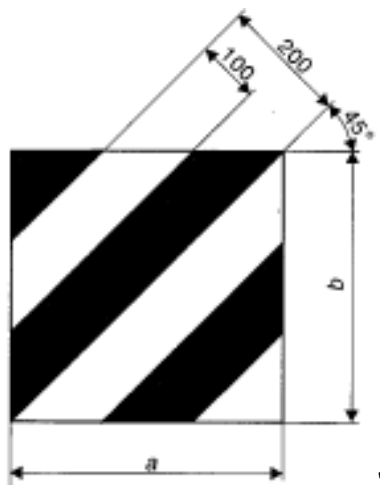

Annex 15

Paragraph 2., amend to read:

"The main purpose of these guidelines is to establish requirements for installation, arrangement, position and geometric visibility of rear marking plates on heavy and long vehicles **as well as on special utility vehicles and trailers**. It increases the visibility and permits an easy identification of these vehicles."

Paragraph 2.1., amend to read:

"The installation of rear marking plates for heavy motor vehicles according to the provisions of this annex is required for vehicles of categories N2 with a maximum mass exceeding 7.5 tonnes and N3 with the exception of tractors

for semi-trailers, and for articulated buses of classes II and III.
The rear marking plates may also be installed on special utility vehicles of categories other than above."

Paragraph 4., add subparagraph (c) to read:

"...

"(c) **For special utility vehicles or trailers:**

Class 5 - red and white retro-reflective alternative stripes."

II. Justification

1. This proposal introduces new class 5 devices made solely of retro-reflective plates with chevron type pattern to be applied to special utility vehicles or trailers not regularly covered by standard rear marking plates.
 2. Some Contracting Parties have national requirements and this amendment attempts to harmonize these requirements.
 3. Basically all requirements for existing classes of rear marking plates have been inserted, including colorimetric, photometric, physical and mechanical.
 4. Also the installation requirements of Annex 15 have been accounted for.
-