



Economic and Social Council

Distr.: General
xx xx 2020

Original: English

Economic Commission for Europe

Inland Transport Committee

World Forum for Harmonization of Vehicle Regulations

182nd session

Geneva, 10-12 November 2020

Item 4.13.4. of the provisional agenda

1958 Agreement:

Consideration of proposals for new UN Regulations

submitted by the Working Parties subsidiary to the World Forum

Proposal for a new UN Regulation on Event Data Recorder

Submitted by the Working Party on General Safety * **

The text reproduced below was adopted by the Working Party on General Safety at its 118th session, held in July 2020 (see ECE/TRANS/WP.29/GRSG/97). It is based on GRSG-118-14. It is submitted to World Forum for Harmonization of Vehicle Regulations (WP.29) and the Administrative Committee of the 1958 Agreement (AC.2) for consideration and vote at their November 2020 sessions.

* In accordance with the programme of work of the Inland Transport Committee for 2020 as outlined in proposed programme budget for 2020 (A/74/6 (part V sect. 20) para 20.37), the World Forum will develop, harmonize and update UN Regulations in order to enhance the performance of vehicles. The present document is submitted in conformity with that mandate.

** This document was scheduled for publication after the standard publication date owing to circumstances beyond the submitter's control.

"UN Regulation No. [XXX]¹

UN Regulation on uniform provisions concerning the approval of motor vehicles with regard to the Event Data Recorder

Contents

Page²

Regulation

0.	Introduction	
1.	Scope	
2.	Definitions	
3.	Application for approval	
4.	Approval	
5.	Requirements	
6.	Modification of vehicle type and extension of approval	
7.	Conformity of production	
8.	Penalties for non-conformity of production	
9.	Production definitively discontinued.....	
10.	Names and addresses of Technical Services responsible for conducting approval tests, and of Type Approval Authorities.....	

Annexes

1	Communication	
2	Information document on the type approval of a vehicle type with regards to its Event Data Recorder (EDR).....	
3	Arrangements of approval marks	
4	Data elements and format.....	

¹ The Regulation number will be known at the time of entry into force of this UN Regulation. [XXX] is intended to be replaced by the Regulation number once known.

² Page numbers will be added at a later stage.

0. Introduction

- 0.1. The intention of this Regulation is to establish uniform provisions concerning the approval of motor vehicles of the Categories M₁ and N₁ with regard to their Event Data Recorders (EDRs).
- 0.2. The provisions concern the minimum collection, storage and crash survivability of motor vehicle crash event data. It does not include specifications for data retrieval tools and methods as that is subject to national/regional level requirement.
- 0.3. The purpose of these provisions is to ensure that EDRs record, in a readily usable manner, data valuable for effective crash investigations and for analysis of safety equipment performance (e.g., advanced restraint systems). These data will help provide a better understanding of the circumstances in which crashes and injuries occur and will facilitate the development of safer vehicle designs.

1. Scope

- 1.1. This ~~Regulation document~~ applies to all passenger cars and light duty vehicles (i.e., 1958 agreement M₁ and N₁ vehicle categories and Category 1-1 vehicles and Category 2 vehicles).
- 1.2. This ~~Regulation document~~ is without prejudice [to requirements of national or regional laws **related to privacy, data protection and personal data processing**].
- 1.3. The following data elements are excluded from the scope: VIN, associated vehicle details, location/positioning data, information of the driver, ~~and~~ date and time of an event, **and [placeholder for potential data elements tbd]**.
- ~~[1.4. Nothing in these performance elements applies to retro fitted or aftermarket systems. Nothing in these performance elements requires the fitment of sensors or systems not currently present in the vehicle, as manufactured, or activation of sensors or systems that are inactive at the time of manufacture.]~~
- 1.5. **If there is no system or sensor designed to provide the data element to be recorded and stored under section 3, in the format (range, resolution, and sample rate) indicated in Annex 4. "DATA ELEMENTS" or it is not operational systems or sensors from which the data required to be recorded and stored under section 3 would originate at the time of recording, are not fitted in the vehicle or inactive at the time of manufacture, this document requires neither recording of such data nor fitting or activating making such systems or sensors operational. However, if the vehicle is fitted with an original equipment manufacturer equipped with such a sensor or system designed to provide the data element in the format specified in Annex 4. "DATA ELEMENTS", then it is mandatory to report record the data element in the specified format when the sensor or system is operational activated. In the case the reason for not being operational at the time of recording is a failure of this system or sensor, this failure state shall be recorded by the EDR as defined in the data elements Annex 4. Data elements.**

2. Definitions

[Note – Some of these definitions refer to data elements that are still under consideration and not yet agreed upon]

For the purposes of these performance elements:

- 2.1. "ABS activity" means the anti-lock brake system (ABS) is actively controlling the vehicle's brakes.
- ~~2.x. "Active/inactive"~~
- 2.2. "Capture" means the process of buffering EDR data in a temporary, volatile storage where it is continuously updated at regular time intervals.
- 2.3. "Delta-V, lateral" means the cumulative change in velocity, as recorded by the EDR of the vehicle, along the lateral axis, ~~starting from crash time zero and ending at 0.25 seconds, recorded every 0.01 seconds.~~
- 2.4. "Delta-V, longitudinal" means the cumulative change in velocity, as recorded by the EDR of the vehicle, along the longitudinal axis, ~~starting from crash time zero and ending at 0.25 seconds, recorded every 0.01 seconds.~~
- 2.5. "Deployment time, frontal air bag" means (for both driver and front passenger) the elapsed time from crash time zero to the deployment command or for multi-staged air bag systems, the deployment command for the first stage.
- 2.6. "Disposal" means the deployment command of the second (or higher, if present) stage of a frontal air bag for the purpose of disposing the propellant from the air bag device.
- 2.7. "End of event time" means the moment at which the cumulative delta-V within a 20 ms time period becomes 0.8 km/h or less, or the moment at which the crash detection algorithm of the air bag control unit resets.
- 2.8. "Engine RPM" means:
- (a) For vehicles powered by internal combustion engines, the number of revolutions per minute of the main crankshaft of the vehicle's engine, and
 - (b) For vehicles not entirely powered by internal combustion engines, the number of revolutions per minute of the motor shaft at the point at which it enters the vehicle transmission gearbox, and
 - (c) For vehicles not powered by internal combustion engines at all, the number of revolutions per minute of the output shaft of the device(s) supplying motive power.
- 2.9. "Engine throttle, percent full" means the driver-requested acceleration as measured by the throttle position sensor on the accelerator control compared to the fully depressed position.
- 2.10. "Event" means a crash or other physical occurrence that causes the trigger threshold to be met or exceeded, or any non-reversible deployable restraint to be deployed, whichever occurs first.
- 2.11. "Event data recorder" (EDR) means a device or function in a vehicle that records the vehicle's dynamic, time-series data during the time period just prior to an event (e.g., vehicle speed vs. time) or during a crash event (e.g., delta-V vs. time), intended for retrieval after the crash event. For the purposes of this definition, the event data does not include audio and video data.
- 2.12. "Frontal air bag" means an inflatable restraint system that requires no action by vehicle occupants and is used to meet the applicable national frontal crash protection requirements.
- 2.13. ~~"Front Air bag warning lamp status"~~ means whether the **air bag malfunction** warning lamp ~~required by national air bag regulations (if any)~~ is on or off.
- 2.14 "If recorded" means if data is recorded in non-volatile memory for the purpose of subsequent downloading.**
- 2.154. "Ignition cycle, crash" means the number (count) of **vehicle** power cycles applied to the recording device at the time when the crash event occurred since the first use of the EDR.

- 2.165. "Ignition cycle download" means the number (count) of **vehicle** power cycles applied to the recording device at the time when the data was downloaded since the first use of the EDR.
- 2.176. "Lateral acceleration" means the component of the vector acceleration of a point in the vehicle in the y-direction. The lateral acceleration is positive from left to right, from the perspective of the driver when seated in the vehicle facing the direction of forward vehicle travel.
- 2.187. "Longitudinal acceleration" means the component of the vector acceleration of a point in the vehicle in the x-direction. The longitudinal acceleration is positive in the direction of forward vehicle travel.
- ~~2.x. "Mandatory, if operational equipped" [means it is mandatory to record the data element if the vehicle is equipped with the relevant sensors or system is fitted to the vehicle and operational. , if applicable, has been [unlocked by the manufacturer for use]. Data elements from optional fit systems are also mandatory to record if those systems have been selected by the driver.]~~
- 2.198. "Maximum delta-V, lateral" means the maximum value of the cumulative change in velocity, as recorded by the EDR, of the vehicle along the lateral axis, ~~starting from crash time zero and ending at 0.3 seconds.~~
- 2.2019. "Maximum delta-V, longitudinal" means the maximum value of the cumulative change in velocity, as recorded by the EDR, of the vehicle along the longitudinal axis, ~~starting from crash time zero and ending at 0.3 seconds.~~
- 2.210. "Maximum delta-V, resultant" means the time-correlated maximum value of the cumulative change in velocity, as ~~reported recorded~~ **reported** by the EDR ~~or processed during data download,~~ along the vector-added longitudinal and lateral axes.
- ~~2.x. "Memory locking" means that event data elements recorded in the EDR, corresponding to a specific event will be prevented from being overwritten by subsequent events.~~
- 2.221. "Multi-event crash" means the occurrence of a **minimum of 2** events, the first and last of which begin not more than 5 seconds apart.
- 2.232. "Non-volatile memory" means the memory reserved for maintaining recorded EDR data in a semi-permanent fashion. Data recorded in non-volatile memory is retained after a loss of power and can be retrieved with EDR data extraction tools and methods.
- 2.243. "Normal acceleration" means the component of the vector acceleration of a point in the vehicle in the z-direction. The normal acceleration is positive in a downward direction ~~and is zero when the accelerometer is at rest.~~
- 2.254. "Occupant position classification" means the classification indicating that the seating posture of a front outboard occupant (both driver and front passenger) is determined as being out-of-position.
- 2.265. "Occupant size classification" means, for front passenger, the classification of an occupant as an adult and not a child, and for the driver, the classification of the driver as not being of small stature as indicated in the data format.
- 2.27. **"Operational" means that the system or sensor, at the time of the event, is active or can be activated/deactivated by the driver.**
- 2.286. "Pretensioner" means a device that is activated by a vehicle's crash sensing system and removes slack from a vehicle safety belt system.
- 2.297. "Record" means the process of saving captured EDR data into a non-volatile storage for subsequent retrieval.
- 2.3028. "Safety belt status" means the feedback from the safety system that ~~is used to determine that an occupant's~~ **the vehicle's** safety belt ~~(for both driver and front passenger)~~ is fastened or unfastened.

- 2.3129. "Seat track position switch, foremost, status" means the status of the switch that is installed to detect whether the seat is moved to a forward position.
- ~~2.x. "Secondary safety protection system" means a system that helps to mitigate the consequences of a collision, such as an airbag or a pop up bonnet.~~
- ~~2.x. "Secondary safety system" means a deployable vehicle system designed to reduce injury consequences by offering protection during a collision, such as a pop up bonnet or airbag.~~
- 2.320. "Service brake, on and off" means the status of the device that is installed in or connected to the brake pedal system to detect whether the pedal was pressed. The device can include the brake pedal switch or other driver-operated service brake control.
- 2.334. "Side air bag" means any inflatable occupant restraint device that is mounted to the seat or side structure of the vehicle interior, and that is designed to deploy in a side impact crash to help mitigate occupant injury and/or ejection.
- Note - Side air bags can also deploy in other crash modes as determined by the vehicle manufacturer.**
- 2.342. "Side curtain/tube air bag" means any inflatable occupant restraint device that is mounted to the side structure of the vehicle interior, and that is designed to deploy in a side impact crash or rollover and to help mitigate occupant injury and/or ejection.
- Note - Side curtain/tube air bags can also deploy in other crash modes as determined by the manufacturer.**
- 2.353. "Speed, vehicle indicated" means the vehicle speed indicated by a manufacturer-designated subsystem designed to indicate the vehicle's ground travel speed during vehicle operation.
- 2.364. "Stability control" means any device that complies with national, "Electronic stability control systems".
- 2.375. "Steering input" means the angular displacement of the steering wheel measured from the straight-ahead position (position corresponding to zero average steer angle of a pair of steered wheels).
- 2.386. ~~"Suppression switch Passenger air bag suppression status" means the status of the passenger air bag (suppressed or not suppressed) switch indicating whether an air bag suppression system is on or off~~
- 2.397. "Time from event 1 to 2" means the elapsed time from time zero of the first event to time zero of the second event **of a multi-event crash.**
- 2.4038. "Time, maximum delta-V, lateral" means the time from crash time zero to the point where the maximum value of the cumulative change in velocity is found, as recorded by the EDR, along the lateral axis.
- 2.4139. "Time, maximum delta-V, longitudinal" means the time from crash time zero to the point where the maximum value of the cumulative change in velocity is found, as recorded by the EDR, along the longitudinal axis.
- 2.420. "Time, maximum delta-V, resultant" means the time from crash time zero to the point where the maximum delta-V resultant occurs, as **reported** ~~recorded~~ by the EDR ~~or processed during data download.~~
- 2.434. "Time to deploy, pretensioner" means the elapsed time from crash time zero to the deployment command for the safety belt pretensioner (for both driver and front passenger).
- 2.442. "Time to deploy, side air bag/curtain" means the elapsed time from crash time zero to the deployment command for a side air bag or a side curtain/tube air bag (for both driver and front passenger).
- 2.453. "Time to first stage" means the elapsed time between time zero and the time when the first stage of a frontal air bag is commanded to fire.

- 2.464. "Time to nth stage" means the elapsed time from crash time zero to the deployment command for the nth stage of a frontal air bag (for both driver and front passenger).
- 2.475. "Time zero" is the time reference for the EDR data timestamps of an event. ~~means the starting point of an event.~~
- 2.486. "Trigger threshold" means the appropriate ~~physical~~ parameter has met the conditions for recording an EDR event.
- ~~2.x. "Unlocked event" means an EDR record that does not meet the locking condition. It may be overwritten by subsequent events.~~
- 2.497. "Vehicle roll angle" means the angle between the vehicle y-axis and the ground plane **as determined by the sensing system.**
- 2.50. "Vehicle type with regard to its Event Data Recorder" means vehicles which do not differ significantly in such essential aspects as:
- (a) The manufacturer's trade name or mark;
 - (b) Vehicle features which significantly influence the performances of the EDR; **Addition of new trigger(s), new data (elements), or modification in their format, shall not be considered as "significantly influencing the performance of EDR";**
 - (c) The main characteristics and design of the EDR.
- 2.5148. "Volatile memory" means the memory reserved for buffering of captured EDR data. The memory is not capable of retaining data in a semi-permanent fashion. Data captured in volatile memory is continuously overwritten and is not retained in the event of a power loss or retrievable with EDR data extraction tools.
- 2.52. **"Vulnerable road user secondary safety system" means a deployable vehicle system outside the occupant compartment designed to mitigate injury consequences to vulnerable road users during a collision.**
- ~~2.x. "Vulnerable road user (VRU)" means a person using no vehicle, such as a pedestrian, or using a vehicle without protective occupant compartment, such as a pedal cyclist, micro vehicle user or motorecyclist.~~
- 2.5349. "X-direction" means in the direction of the vehicle's X-axis, which is parallel to the vehicle's longitudinal centerline. The X-direction is positive in the direction of forward vehicle travel.
- 2.540. "Y-direction" means in the direction of the vehicle's Y-axis, which is perpendicular to its X-axis and in the same horizontal plane as that axis. The Y-direction is positive from left to right, from the perspective of the driver when seated in the vehicle facing the direction of forward vehicle travel.
- 2.551. "Z-direction" means in the direction of the vehicle's Z-axis, which is perpendicular to the X and Y-axes. The Z-direction is positive in a downward direction.

3. Application for approval

- 3.1. The application for approval of a vehicle type with regard to its EDR shall be submitted by the vehicle manufacturer or by his authorized representative to the approval authority of the Contracting Party according to the provisions of Schedule 3 of the 1958 Agreement.
- 3.2. It shall be accompanied by the following documentation (a model of the information document is given in Annex 2):
- 3.2.1. A description of the vehicle type with regard to the items specified in paragraph 5 below, in particular related to the location of the EDR in the vehicle, the

triggering parameters, storing capacity and the resistance to high deceleration and mechanical stress of a severe impact;

- 3.2.2. The data elements and format stored in the EDR;
- 3.2.3. Instructions for retrieving data from the EDR.
- 3.3. A vehicle representative of the vehicle type to be approved shall be submitted to the approval authority or its designated technical service responsible for conducting the approval tests.

4. Approval

- 4.1. If the vehicle type submitted for approval pursuant to this Regulation meets the requirements of paragraph 5. below, approval of that vehicle type shall be granted.
- 4.2. An approval number shall be assigned to each type approved. Its first two digits (at present 00 for the Regulation in its original form) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party shall not assign the same number to another type of vehicle.
- 4.3. Notice of approval or of extension or of refusal or of withdrawal of approval or of production definitively discontinued of a vehicle type pursuant to this Regulation shall be communicated to the Contracting Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 1 to this Regulation and documentation supplied by the applicant being in a format not exceeding A4 (210 × 297mm) and on an appropriate scale or electronic format.
- 4.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle conforming to a vehicle type approved under this Regulation, an international approval mark conforming to the model described in Annex 3, consisting of either:
 - 4.4.1. A circle surrounding the letter "E" followed by:
 - (a) The distinguishing number of the country which has granted approval;³ and
 - (b) The number of this Regulation, followed by the letter "R", a dash and the approval number to the right of the circle prescribed in this paragraph;or
 - 4.4.2. An oval surrounding the letters "UI" followed by the Unique Identifier.
- 4.5. The approval mark shall be clearly legible and be indelible.
- 4.6. The approval authority shall verify the existence of satisfactory arrangements for ensuring effective checks on conformity of production before type-approval is granted.

5. Requirements

Requirements for vehicles ~~fitted equipped~~ with an EDR include data elements, data format, data capture, and crash test performance and survivability.

³ The distinguishing numbers of the Contracting Parties to the 1958 Agreement are reproduced in Annex 3 to the Consolidated Resolution on the Construction of Vehicles (R.E.3), document ECE/TRANS/WP.29/78/Rev.6 - www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29resolutions.html

- 5.1. Data elements
- 5.1.1. Each vehicle ~~fitted equipped~~ with an EDR shall record the data elements specified as mandatory and those required under specified minimum conditions during the interval/time and at the sample rate specified in Annex 4, Table 1.
- 5.2. Data format
- 5.2.1. Each data element recorded shall be reported in accordance with the range, accuracy, and resolution specified in Annex 4, Table 1.
- 5.2.2. Acceleration Time-History data and format: the longitudinal, lateral, and normal acceleration time-history data, as applicable, shall be filtered either during the recording phase or during the data downloading phase to include:
- 5.2.2.1. The Time Step (TS) that is the inverse of the sampling frequency of the acceleration data and which has units of **milliseconds**;
- 5.2.2.2. The number of the first point (NFP), which is an integer that when multiplied by the TS equals the time relative to time zero of the first acceleration data point;
- 5.2.2.3. The number of the last point (NLP), which is an integer that when multiplied by the TS equals the time relative to time zero of the last acceleration data point; and
- 5.2.2.4. $NLP - NFP + 1$ acceleration values sequentially beginning with the acceleration at time $NFP * TS$ and continue sampling the acceleration at TS increments in time until the time $NLP * TS$ is reached.
- 5.3. Data capture
- The EDR shall record the captured data in the vehicle **and this data shall remain in the vehicle subject to the provisions of paragraph 5.3.4, until they are retrieved in compliance with national or regional legislation or they are overwritten in compliance with paragraph 5.3.4.**
- The EDR non-volatile memory buffer shall accommodate the data related to at least [two/three] different events.
- The data elements for every event shall be captured and recorded by the EDR, as specified in paragraph 5.1 in accordance with the following conditions and circumstances:
- 5.3.1. Conditions for triggering recording of data
- An event shall be recorded by the EDR if one of the following threshold values is met or exceeded:
- 5.3.1.1. Change in longitudinal vehicle velocity more than 8 km/h within a 150 ms or less interval.
- 5.3.1.2. Change in lateral vehicle velocity more than 8 km/h within a 150 ms or less interval
- 5.3.1.3. Activation of Non-reversible occupant restraint system.
- 5.3.1.4. Activation of **Vulnerable road user (VRU)** secondary safety ~~protection~~ system
- If a vehicle is not ~~fitted equipped~~ with any **Vulnerable road user VRU** secondary safety ~~protection~~ system, this document requires neither recording of data nor fitting of such systems. However, if the vehicle is ~~fitted equipped~~ with such a system, then it is mandatory to record the event data following activation of this system ~~whenever the Contracting Party so requires.~~
- 5.3.2. Conditions for triggering locking of data

- In the circumstances provided below, the memory for the event shall be locked to prevent any future overwriting of the data.
- 5.3.2.1. In all the cases where a non-reversible occupant restraint system is deployed.
- 5.3.2.2. In the case of a frontal impact, if the vehicle is not **fitted equipped** with a non-reversible restraint system for front impact, when the vehicle's velocity change in x-axis direction exceeds 25 km/h within 150ms or less interval.
- ~~5.3.2.3. [In the case of a rear impact, [if the vehicle is not equipped with a non-reversible restraint system for rear impact], when the vehicle's velocity change in x-axis direction exceeds [xx] km/h within 150ms or less interval. [In circumstances, where a deployable restraint system is present the manufacturer can choose whether to trigger on restraint system deployment or the conditions above.]]~~
- 5.3.2.4. Activation of **Vulnerable road user** ~~VRU~~ secondary safety ~~protection~~ system
- 5.3.3. Conditions for establishment of time zero
- Time zero is established at the time when any of the following first occurs:
- 5.3.3.1. For systems with "wake-up" air bag control systems, the time at which the occupant restraint control algorithm is activated; or
- 5.3.3.2. For continuously running algorithms,
- 5.3.3.2.1. The first point in the interval where a longitudinal, cumulative delta-V of over 0.8 km/h is reached within a 20 ms time period; or
- 5.3.3.2.2. For vehicles that record "delta-V, lateral," the first point in the interval where a lateral, cumulative delta-V of over 0.8 km/h is reached within a 5 ms time period; or
- 5.3.3.3. Deployment of a non-reversible deployable restraint or activation of VRU secondary safety protection system.
- 5.3.4. Overwriting
- 5.3.4.1 If an EDR non-volatile memory buffer void of previous-event data is not available, the recorded data shall, subject to the provisions of paragraph 5.3.2., be overwritten by the current event data, on a first-in first-out basis, or according to different strategies decided by the manufacturer and made available to the relevant authorities of Contracting Parties.**
- 5.3.4.2 Furthermore, if an EDR non-volatile memory buffer void of previous-event data is not available, data originating from non-reversible restraint system or Vulnerable road user secondary safety system deployment events referred to in paragraph 5.3.2 shall always overwrite any other data.**
- 5.3.5. Power failure
- Data recorded in non-volatile memory is retained after loss of power.
- 5.4. Crash test performance and survivability
- 5.4.1. Each vehicle subject to the requirements of national or regional frontal crash test regulations, shall conform with the specifications in paragraph 5.4.3.
- 5.4.2. Each vehicle subject to the requirements of national or regional side impact crash test regulations, ~~that meets a trigger threshold or has a [frontal] air bag deployment,~~ shall conform with the specifications of paragraph 5.4.3.
- 5.4.3. The data elements required by paragraph 5.1, shall be recorded in the format specified by paragraph 5.2, exist at the completion of the crash test and the complete data recorded element shall read "yes" after the test. Elements that are not operating normally in crash tests (e.g., those related to engine operation,

braking, etc.) are not required to meet the accuracy or resolution requirements in these crash tests.

The data shall be retrievable even after an impact of a severity level set by UN Regulations Nos.94, 95 or 137.

5.5 It shall not be possible to deactivate the Event Data Recorder

6. Modification of vehicle type and extension of approval

- 6.1. Every modification of the vehicle type as defined in paragraph 2.x of this Regulation shall be notified to the approval authority which approved the vehicle type. The approval authority may then either:
- 6.1.1. Consider that the modifications made do not have an adverse effect on the conditions of the granting of the approval and grant an extension of approval;
- 6.1.2. Consider that the modifications made affect the conditions of the granting of the approval and require further tests or additional checks before granting an extension of approval.
- 6.2. Confirmation or refusal of approval, specifying the alterations, shall be communicated by the procedure specified in paragraph 4.3. above to the Contracting Parties to the Agreement applying this Regulation.
- 6.3. The approval authority shall inform the other Contracting Parties of the extension by means of the communication form which appears in Annex 1 to this Regulation. It shall assign a serial number to each extension, to be known as the extension number.

7. Conformity of production

- 7.1. Procedures for the conformity of production shall conform to the general provisions defined in Article 2 and Schedule 1 to the Agreement (E/ECE/TRANS/505/Rev.3) and meet the following requirements:
- 7.2. A vehicle approved pursuant to this Regulation shall be so manufactured as to conform to the type approved by meeting the requirements of paragraph 5. above;
- 7.3. The approval authority which has granted the approval may at any time verify the conformity of control methods applicable to each production unit. The normal frequency of such inspections shall be once every two years.

8. Penalties for non-conformity of production

- 8.1. The approval granted in respect of a vehicle type pursuant to this Regulation may be withdrawn if the requirements laid down in paragraph 7. above are not complied with.
- 8.2. If a Contracting Party withdraws an approval it had previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation by sending them a communication form conforming to the model in Annex 1 to this Regulation.

9. Production definitively discontinued

If the holder of the approval completely ceases to manufacture a type of vehicle approved in accordance with this Regulation, he shall so inform the approval

authority which granted the approval, which in turn shall forthwith inform the other Contracting Parties to the Agreement applying this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.

10. Names and addresses of the Technical Services responsible for conducting approval tests and of Type Approval Authorities

The Contracting Parties to the Agreement applying this Regulation shall communicate to the United Nations Secretariat⁴ the names and addresses of the technical services responsible for conducting approval tests and of the approval authorities which grant approval and to which forms certifying approval or extension or refusal or withdrawal of approval are to be sent.

⁴ Through the online platform ("/343 Application") provided by UNECE and dedicated to the exchange of such information: <https://www.unece.org/trans/main/wp29/datasharing.html>

Annex 1

Communication

(Maximum format: A4 (210 x 297 mm))



issued by : (Name of administration)

Concerning: ² Approval granted
 Approval extended
 Approval refused
 Approval withdrawn
 Production definitively discontinued

of a vehicle type with regard to its Event Data Recorder (EDR) pursuant to UN Regulation No. [XXX]

Approval No.:

Reason(s) for extension (if applicable):

1. Trade name or mark of the vehicle:
2. Vehicle type:
3. Name and address of manufacturer:
4. If applicable, name and address of manufacturer's representative:
5. Brief description of vehicle:
6. Technical service responsible for conducting the approval tests:
- 6.1. Date of report issued by that service:
- 6.2. Number of report issued by that service:
7. Approval granted/refused/extended/withdrawn:²
8. Position of approval mark on the vehicle:
9. Place:.....
10. Date:.....
11. Signature:.....
12. The list of documents deposited with the approval authority which has granted approval is annexed to this communication.

¹ Distinguishing number of the country which has granted/extended/refused/withdrawn an approval (see approval provisions in this Regulation).

² Strike out what does not apply.

Annex 2

Information document on the type approval of a vehicle type with regard to its Event Data Recorder (EDR)

A list of contents shall be included.

Any drawings shall be supplied in appropriate scale and in sufficient detail on size A4 paper or on a folder of A4 format.

Photographs, if any, shall show sufficient detail.

General

1. Trade name or mark of vehicle:
2. Vehicle type:
3. Means of identification of type, if marked on the vehicle:
4. Location of the marking:
5. Location of and method of affixing the approval mark:
6. Category of vehicle:
7. Name and address of manufacturer:
8. Address(es) of assembly plant(s):
9. Photograph(s) and/or drawing(s) of a representative vehicle:
10. EDR
 - 10.1. Make (trade name of manufacturer):
 - 10.2. Type and general commercial description(s):
 - 10.3. Drawing(s) or photographs showing the location and method of attachment of the EDR in the vehicle:
 - 10.4. Description of the triggering parameter:
 - 10.5. Description of any other relevant parameter (storing capacity, resistance to high deceleration and mechanical stress of a severe impact, etc.):
 - 10.6. The data elements and data format stored in the EDR:


<i>Data element</i>	<i>Recording interval/time (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy</i>	<i>Resolution</i>

- 10.7. Instructions for retrieving data from the EDR:

Annex 3


Arrangements of approval marks

(see paragraphs 4.4. to 4.4.2. of this Regulation)

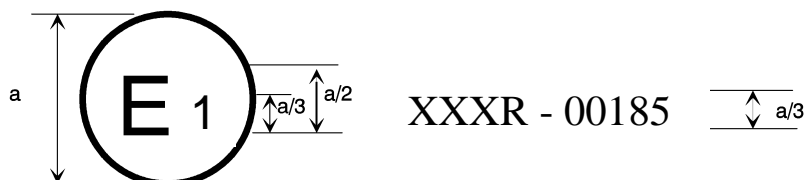

$a = 8 \text{ mm min}$

The above approval mark affixed to a vehicle shows that the vehicle type with regard to its EDR concerned has been approved in Germany (E 1) pursuant to UN Regulation No. [XXX]. The first two digits of the approval number indicate that the approval was granted in accordance with the requirements of UN Regulation No. [XXX] in its original form.

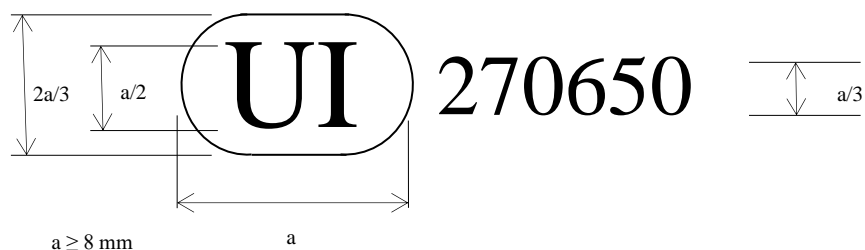

$a \geq 8 \text{ mm}$

a

The above Unique Identifier shows that the type concerned has been approved and that the relevant information on that type-approval can be accessed on the UN secure internet database by using 270650 as Unique Identifier. Any leading zeroes in the Unique Identifier may be omitted in the approval marking.

Annex 4

Data elements and format⁷

Table 1

<i>Data element</i>	<i>Condition for requirement⁸</i>	<i>Recording interval/time⁹ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy¹⁰</i>	<i>Resolution</i>
Delta-V, longitudinal	Mandatory - not required if longitudinal acceleration recorded at ≥ 500 Hz with sufficient range and resolution to calculate delta-v with required accuracy	0 to 250 ms or 0 to End of Event Time plus 30 ms, whichever is shorter.	100	-100 km/h to + 100 km/h.	$\pm 10\%$	1 km/h.
Maximum delta-V, longitudinal	Mandatory - not required if longitudinal acceleration recorded at ≥ 500 Hz	0–300 ms or 0 to End of Event Time plus 30 ms, whichever is shorter.	N/A	-100 km/h to + 100 km/h.	$\pm 10\%$	1 km/h.
Time, maximum delta-V	Mandatory - not required if longitudinal acceleration recorded at ≥ 500 Hz	0–300 ms or 0 to End of Event Time plus 30 ms, whichever is shorter.	N/A	0–300 ms, or 0-End of Event Time plus 30 ms, whichever is shorter.	± 3 ms	2.5 ms.
Speed, vehicle indicated	Mandatory	-5.0 to 0 sec	2	0 km/h to 200 km/h	± 1 km/h	1 km/h.
Engine throttle, % full (or accelerator pedal, % full)	Mandatory	-5.0 to 0 sec	2	0 to 100%	$\pm 5\%$	1%

⁷ Format requirements specified below are minimum requirements and manufacturers can exceed them.

⁸ “Mandatory” is subject to the conditions detailed in Section 1.

⁹ Pre-crash data and crash data are asynchronous. The sample time accuracy requirement for pre-crash time is -0.1 to 1.0 sec (e.g., T = -1 would need to occur between -1.1 and 0 seconds.)

¹⁰ Accuracy requirement only applies within the range of the physical sensor. If measurements captured by a sensor exceed the design range of the sensor, the reported element shall indicate when the measurement first exceeded the design range of the sensor.

<i>Data element</i>	<i>Condition for requirement⁸</i>	<i>Recording interval/time⁹ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy¹⁰</i>	<i>Resolution</i>
Service brake, on/off	Mandatory	-5.0 to 0 sec	2	On or Off	N/A	On or Off.
Ignition cycle, crash	Mandatory	-1.0 sec	N/A	0 to 60,000	±1 cycle	1 cycle.
Ignition cycle, download	Mandatory	At time of download ¹¹	N/A	0 to 60,000	±1 cycle	1 cycle.
Frontal air bag warning lamp, on/off ¹²	Mandatory	-1.0 sec	N/A	On or Off	N/A	On or Off.
Frontal air bag deployment, time to deploy, in the case of a single stage air bag, or time to first stage deployment, in the case of a multi-stage air bag, driver.	Mandatory	Event	N/A	0 to 250 ms	±2ms	1 ms.
Frontal air bag deployment, time to deploy, in the case of a single stage air bag, or time to first stage deployment, in the case of a multi-stage air bag, front passenger.	Mandatory	Event	N/A	0 to 250 ms	±2 ms	1 ms.
Multi-event, number of event	Mandatory	Event	N/A	1 or 2	N/A	1 or 2.
Time from event 1 to 2	Mandatory	As needed	N/A	0 to 5.0 sec	±0.1 sec	0.1 sec
Complete file recorded (yes, no)	Mandatory	Following other data	N/A	Yes or No	N/A	Yes or No.
Lateral acceleration	¹³					

¹¹ The ignition cycle at the time of download is not required to be recorded at the time of the crash, but shall be reported during the download process.

¹² The frontal air bag warning lamp is the readiness indicator specified in national air bag requirements, and may also illuminate to indicate a malfunction in another part of the deployable restraint system.

¹³ ~~"If recorded" means if the data is recorded in non-volatile memory for the purpose of subsequent downloading.~~

<i>Data element</i>	<i>Condition for requirement⁸</i>	<i>Recording interval/time⁹ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy¹⁰</i>	<i>Resolution</i>
Longitudinal acceleration						
Delta-V, lateral	If recorded Mandatory - not required if lateral acceleration recorded at ≥ 500 Hz with sufficient range and resolution to calculate delta-v with required accuracy	0–250 ms or 0 to End of Event Time plus 30 ms, whichever is shorter.	100	-100 km/h to + 100 km/h.	$\pm 10\%$	1 km/h.
Maximum delta-V, lateral	If recorded Mandatory - not required if lateral acceleration recorded at ≥ 500 Hz	0–300 ms or 0 to End of Event Time plus 30 ms, whichever is shorter.	N/A	-100 km/h to + 100 km/h.	$\pm 10\%$	1 km/h.
Time maximum delta-V, lateral	If recorded Mandatory - not required if lateral acceleration recorded at ≥ 500 Hz	0–300 ms or 0 to End of Event Time plus 30 ms, whichever is shorter.	N/A	0–300 ms, or 0-End of Event Time plus 30 ms, whichever is shorter.	± 3 ms	2.5 ms.
Time for maximum delta-V, resultant.	If recorded Mandatory - not required if relevant acceleration recorded at ≥ 500 Hz	0–300 ms or 0 to End of Event Time plus 30 ms, whichever is shorter.	N/A	0–300 ms, or 0-End of Event Time plus 30 ms, whichever is shorter.	± 3 ms	2.5 ms.
Engine rpm	If recorded Mandatory	-5.0 to 0 sec	2	0 to 10,000 rpm	± 100 rpm ¹⁴	100 rpm.

¹⁴ [These elements do not need to meet the accuracy and resolution requirements in specified crash tests.]

<i>Data element</i>	<i>Condition for requirement⁸</i>	<i>Recording interval/time⁹ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy¹⁰</i>	<i>Resolution</i>
Vehicle roll angle	If recorded [Mandatory to record either roll angle or roll rate]	[-1.0 up to 5.0 sec ¹⁵]	[10]	[-1080 deg to + 1080 deg.]	[±10%]	[10 deg.]
Vehicle roll rate	[Mandatory to record either roll angle or roll rate]					
ABS activity (engaged, non-engaged).	If recorded Mandatory	-5.0 to 0 sec	2	On or Off Faulted, Active, Intervening¹⁶	N/A	On or Off Faulted, Active, Intervening¹⁵
Stability control (on, off, or engaged).	If recorded Mandatory	-5.0 to 0 sec	2	On, Off, or Engaged Faulted, On, Off, Intervening¹⁵	N/A	On, Off, or Engaged Faulted, On, Off, Intervening¹⁵
Steering input	If recorded Mandatory	-5.0 to 0 sec	2	-250 deg CW to + 250 deg CCW.	±5%	±1%.
Safety belt status, front passenger (buckled, not buckled).	If recorded Mandatory	-1.0 sec	N/A	On or Off buckled, not buckled	N/A	On or Off buckled, not buckled
Frontal Passenger air bag suppression switch-status, front passenger (on, off, or auto suppressed or not suppressed)	If recorded Mandatory	-1.0 sec	N/A	On, Off, or Auto suppressed or not suppressed	N/A	On, Off, or Auto suppressed or not suppressed
Frontal air bag deployment, time to nth stage, driver ⁴ .	Mandatory if fitted with a driver's frontal air bag with a multi-stage inflator.	Event	N/A	0 to 250 ms	±2 ms	1 ms.

¹⁵ "vehicle roll angle" may be recorded in any time duration; -1.0 sec to 5.0 sec is suggested.

¹⁶ **Manufacturers can include other system states**

<i>Data element</i>	<i>Condition for requirement⁸</i>	<i>Recording interval/time⁹ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy¹⁰</i>	<i>Resolution</i>
Frontal air bag deployment, time to nth stage, front passenger ¹⁷ .	Mandatory if fitted with a front passenger's frontal air bag with a multi-stage inflator.	Event	N/A	0 to 250 ms	±2 ms	1 ms.
Frontal air bag deployment, nth stage disposal, driver, Y/N (whether the nth stage deployment was for occupant restraint or propellant disposal purposes).	If recorded	Event	N/A	Yes or No	N/A	Yes or No.
Frontal air bag deployment, nth stage disposal, front passenger, Y/N (whether the nth stage deployment was for occupant restraint or propellant disposal purposes).	If recorded	Event	N/A	Yes or No	N/A	Yes or No.
Side air bag deployment, time to deploy, driver.	Mandatory if recorded	Event	N/A	0 to 250 ms	±2 ms	1 ms.
Side air bag deployment, time to deploy, front passenger.	Mandatory if recorded	Event	N/A	0 to 250 ms	±2 ms	1 ms.
Side curtain/tube air bag deployment, time to deploy, driver side.	Mandatory if recorded	Event	N/A	0 to 250 ms	±2 ms	1 ms.

¹⁷ List this element n - 1 times, once for each stage of a multi-stage air bag system.

<i>Data element</i>	<i>Condition for requirement⁸</i>	<i>Recording interval/time⁹ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy¹⁰</i>	<i>Resolution</i>
Side curtain/tube air bag deployment, time to deploy, passenger side.	Mandatory If recorded	Event	N/A	0 to 250 ms	±2 ms	1 ms.
Pretensioner deployment, time to fire, driver.	Mandatory If recorded	Event	N/A	0 to 250 ms	±2 ms	1 ms.
Pretensioner deployment, time to fire, front passenger.	Mandatory If recorded	Event	N/A	0 to 250 ms	±2 ms	1 ms.
Seat track position switch, foremost, status, driver.	If recorded Mandatory if fitted and used for deployment decision	-1.0 sec	N/A	Yes or No	N/A	Yes or No.
Seat track position switch, foremost, status, front passenger.	If recorded Mandatory if fitted and used for deployment decision	-1.0 sec	N/A	Yes or No	N/A	Yes or No.
Occupant size classification, driver (5th percentile female or larger)	If recorded	-1.0 sec	N/A	5th percentile female or larger.	N/A	Yes or No.
Occupant size classification, front passenger (6yr old child or smaller).	If recorded	-1.0 sec	N/A	6yr old HIII ATD or Q6 ATD or smaller	N/A	Yes or No.

Note - The following data elements in brackets have been proposed, but time did not allow for further consideration/discussion by the EDR/DSSAD IWG.

<i>Data element</i>	<i>Condition for requirement¹</i>	<i>Recording interval/time⁸ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy⁹</i>	<i>Resolution</i>
[Normal Acceleration]						
[Safety belt status, rear passengers]						
[Horn]						
[Turn Indicator status]						
[Hazard Indicator Status]						
[Main beam]						
[Dip beam]						
[Advanced adaptive front headlight Status]						
[Brake lights Status]						
[Warning Light/ Beacon Light]						
[Tyre Pressure]						
[Tyre Pressure Monitoring System (TPMS) Warning Lamp Status]						
[Parking Brake Status]						
[Brake Pedal Position]						
[Brake Warning Indicator Status]						
[Brake System Internal Pressure]						
[Braking Request]						

<i>Data element</i>	<i>Condition for requirement¹</i>	<i>Recording interval/time⁸ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy⁹</i>	<i>Resolution</i>
[Gear Position]						
[Gear Selection Status]						
[Propulsion Source Torque]						
[Ambient Temperature]						
[Front Wiper Status]						
[Vehicle Identification Number (VIN)]						
[Roll over detection]						
[Yaw Angle]						
[Yaw Rate]						
[Traction Control Status]						
[Latitude (GPS)]						
[Longitude (GPS)]						
[AEBS status]						
[Emergency Steering Function status]						
[Emergency Call System status]						
[Intelligent Speed Assistance (ISA) Status]						
[Intelligent Speed Assistance (ISA) road speed limit]						
[Traffic Sign Recognition]						
[Cruise Control System]						

<i>Data element</i>	<i>Condition for requirement¹</i>	<i>Recording interval/time⁸ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy⁹</i>	<i>Resolution</i>
[Adaptive Cruise Control Status (driving automation system level 1)]						
[Blind Spot Monitoring Status]						
[Lane Departure Warning Status]						
[Lane Keep Assist Status]						
[Emergency Lane Keeping Status]						
[Lane Centering Assist]						
[Forward Collision Warning Status]						
[Emergency Stop Signal Status]						
[Multi collision brake]						
[Rear Cross-traffic Collision Warning Status]						
[Reversing Detection System Status]						
[Advanced Driver Distraction Warning Status]						
[Driver Drowsiness and Attention Warning Status]						
[Alcohol Interlock Status]						
[Parking Assist Status]						

<i>Data element</i>	<i>Condition for requirement¹</i>	<i>Recording interval/time⁸ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy⁹</i>	<i>Resolution</i>
[Rear AEBS Status]						
[Partial Driving Operating Status (driving automation system level 2)]						
[ADAS Software version]						
[Automated Driving System - Change in Status]						
[Automated Driving System - Transition Demand]						
[Automated Driving System - Minimal Risk Maneuver/ Failure Mitigation Strategy Activated]						
[Automated Driving System – Override/ADS - Fallback-Ready User Intervention]						
[Steering Input Requested]						
[Occupant/Pedestrian protection device deployment Status.]						
[Occupant Protection Pressure Sensor]						
[Occupant Protection Pressure Rate of Change]						

<i>Data element</i>	<i>Condition for requirement¹</i>	<i>Recording interval/time⁸ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy⁹</i>	<i>Resolution</i>
[Occupant/Pedestrian protection device deployment time.]						
[Pedestrian protection device Warning lamp.]						
[Pedestrian protection device System Warning lamp On Time.]						
[Number of cycles Pedestrian protection device System Warning lamp has been on.]						
[Pedestrian Protection Acceleration]						
[Pedestrian Protection Pressure Sensor]						
[Pedestrian Protection Pressure Rate of Change]						
[Occupant protection device Warning lamp.]						
[Number of Cycles Occupant Protection System Warning Lamp On Time]						
[Pedestrian and cyclist collision warning system.]						
[Pre-Safe Systems]						

<i>Data element</i>	<i>Condition for requirement¹</i>	<i>Recording interval/time⁸ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy⁹</i>	<i>Resolution</i>
[Accident Year]						
[Accident Month]						
[Accident Day]						
[Accident Hour]						
[Accident Minute]						
[Accident Second]						
[Download Year]						
[Download Month]						
[Download Day]						
[Download Hour]						
[Download Minute]						
[Download Second]						
[Highly accurate position Information]						
[Images Outside]						
[Surrounding Objects]						
[Other ADAS]						
[[Domain / street type]						
[Driving Profile Status]						
[V2X warnings type]						
[V2X warnings time]						
[Door lock]						

<i>Data element</i>	<i>Condition for requirement¹</i>	<i>Recording interval/time⁸ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy⁹</i>	<i>Resolution</i>
[List of Error codes of active and passive safety systems]						
[Connected functions]						
[Cyber attack]						
[Trigger type]						
[State of battery charge]						
[State of battery health]						
[State of battery function]						
[Brake override system]						
[Clipping flag]						
[ECU Hardware number]						
[ECU(s) Software Number(s)]						
[ECU(s) Serial Number(s)]						
[ECU(s) Power Applied]						
[ECU(s) Life Timer at event]						
[ECU(s) Life Timer at imaging]						
[Peripheral Acceleration]						
[Electronic Stop Start]						
[Event Type]						
[Ignition Button Counter per key cycle]						

<i>Data element</i>	<i>Condition for requirement¹</i>	<i>Recording interval/time⁸ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy⁹</i>	<i>Resolution</i>
[Powertrain Control Module Malfunction Indicator Status (PCM MIL Status)]						
[Manifold Absolute Pressure (MAP)]						
[Mass Airflow]						
[Minutes in Operation at Event]						
[Sensor Design Range Exceeded, XX]						
[Pre-event Synchronization Timer]						
[Vehicle Mileage]						
[Rollover Restraint System Disabled Indicator Status]						
[EDR retrieval tool software status]						
[Soft object collisions]						
[ADS Emergency Maneuver]						
[Safety belt status mid-position front]						
[Far side impact airbag]						
[Belt force limiter]						
[Elevation Profile]						

<i>Data element</i>	<i>Condition for requirement¹</i>	<i>Recording interval/time⁸ (relative to time zero)</i>	<i>Data sample rate (samples per second)</i>	<i>Minimum range</i>	<i>Accuracy⁹</i>	<i>Resolution</i>
[High Voltage]						
[Suspension settings]						
[Rotational velocity of each wheel]						
[Steering output of each wheel]						
[Key on seconds]						
[Vehicle pitch angle]						
[Position of the vehicle on the road]						

_____]