



**Economic and Social
Council**

Distr.
GENERAL

TRANS/WP.29/2004/20
5 December 2003

Original: ENGLISH

ECONOMIC COMMISSION FOR EUROPE

INLAND TRANSPORT COMMITTEE

World Forum for Harmonization of Vehicle Regulations (WP.29)
(One-hundred-and-thirty-second session,
9-12 March 2004, agenda item 4.2.7.)

PROPOSAL FOR DRAFT SUPPLEMENT 10 TO THE 03 SERIES
OF AMENDMENTS TO REGULATION No. 36

(Large capacity passenger vehicles)

Transmitted by the Working Party on General Safety Provisions (GRSG)

Note: The text reproduced below was adopted by GRSG at its eighty-fifth session, and is transmitted for consideration to WP.29 and to AC.1. It is based on documents TRANS/WP.29/GRSG/2003/18 as amended by informal document No. 12 and on TRANS/WP.29/GRSG/64, annex 2.

This document is a working document circulated for discussion and comments. The use of this document for other purposes is the entire responsibility of the user.

Documents are also available via the INTERNET:
<http://www.unece.org/trans/main/welcwp29.htm>

Paragraph 5.7.8.5.1., amend to read:

"5.7.8.5.1. For a seat behind a partition or other rigid structure other than a seat, a minimum clear space in front of each passenger seat shall be provided as shown in annex 3, figure 8. A partition whose contour corresponds approximately to that of the inclined seat back may intrude into this space as provided by paragraph 5.7.8.4."

Insert a new paragraph 5.7.8.5.2., to read:

"5.7.8.5.2. For a seat behind a seat and/or a seat facing the gangway, a minimum clear foot space of at least 300 mm depth and a width according to paragraph 5.7.8.1.1., shall be provided as shown in annex 3, figure 6b. The local presence in this space of seat legs and of intrusions as provided by paragraph 5.7.8.6.2.3. shall be permitted provided that adequate space remains for the passengers' feet. This foot space may partly be situated in and/or above the gangway but shall not create any obstruction when measuring the minimum gangway-width in accordance with paragraph 5.7.5."

Paragraph 5.7.8.5.2., renumber as paragraph 5.7.8.5.3.

Annex 3.

Figure 6. renumber as Figure 6a.

Insert a new figure 6b, to read:

"Figure 6b

SPACE FOR SEATED PASSENGERS BEHIND A SEAT AND/ OR A SEAT FACING THE
GANGWAY
(see paragraph 5.7.8.5.2)

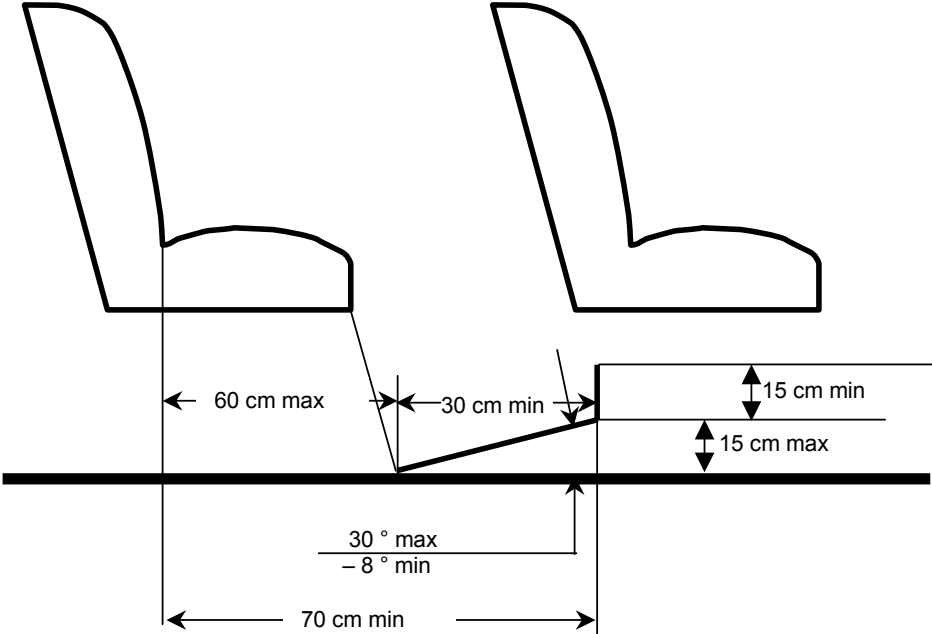


Figure 8, amend the title to read:

"Figure 8

SPACE FOR SEATED PASSENGERS BEHIND A PARTITION OR OTHER RIGID
STRUCTURE OTHER THAN A SEAT
(see paragraph 5.7.8.5.1)"
