

**UN ECE - INFORMAL GRPE WORKING GROUP ON HYDROGEN  
FUEL CELL VEHICLES - GRPE-H2FCV  
SUB-WORKING GROUP ENVIRONMENT (SGE)**

*Report summarising the findings and recommendations in the different areas  
addressed by the SGE in support of the harmonisation process.*

<b>1.</b>	<b>INTRODUCTION.....</b>	<b>1</b>
<b>2.</b>	<b>SCOPE .....</b>	<b>2</b>
<b>3.</b>	<b>METHODOLOGY USED.....</b>	<b>2</b>
<b>4.</b>	<b>ASPECTS ADDRESSED BY THE SGE.....</b>	<b>3</b>
<b>5.</b>	<b>FUEL CONSUMPTION, EXTERNAL ELECTRICAL CONSUMPTION AND MAXIMUM SPEED MEASUREMENT .....</b>	<b>5</b>
5.1.	INTRODUCTION.....	5
5.2.	FUEL CONSUMPTION.....	6
5.2.1.	<i>Explanation and specification of the issue.....</i>	6
5.2.2.	<i>Application and Scope .....</i>	7
5.2.2.1.	Vehicle categories .....	7
5.2.2.2.	Propulsion systems.....	7
5.2.3.	<i>Definitions .....</i>	7
5.2.4.	<i>Overview on existing Regulation and Standard.....</i>	7
5.2.4.1.	Fuel cell systems: Stack and Components.....	7
5.2.4.2.	Pure Fuel Cell Vehicles.....	8
5.2.4.3.	Missing standards.....	9
5.2.4.4.	Hybrid Fuel Cell Vehicles.....	9
5.2.4.5.	ICE-H2 Hybrid Vehicles.....	9
5.2.5.	<i>Overview of the state of art.....</i>	9
5.2.6.	<i>On going finalised research.....</i>	9
5.2.7.	<i>Further research needed.....</i>	9
5.2.8.	<i>Assessment of the harmonization.....</i>	9
5.3.	EXTERNAL ELECTRICAL CONSUMPTION.....	10
5.3.1.	<i>Explanation and specification of the issue.....</i>	10
5.3.2.	<i>Application and scope.....</i>	10
5.3.2.1.	Vehicle categories .....	10
5.3.2.2.	Propulsion systems.....	10
5.3.3.	<i>Overview on existing Regulation and Standard.....</i>	10
5.3.3.1.	Fuel Cell Hybrid Vehicles.....	10
5.4.	MAXIMUM SPEED MEASUREMENT – ENGINE POWER MEASUREMENT .....	10
5.4.1.	<i>Explanation and specification of the issue.....</i>	10
5.4.2.	<i>Application and scope.....</i>	11
5.4.2.1.	Vehicle categories .....	11
5.4.2.2.	Propulsion system .....	11
5.4.3.	<i>Overview on existing Regulation and Standard.....</i>	11
5.5.	REFERENCE DOCUMENTS.....	11
5.6.	REFERENCES .....	13
<b>6.</b>	<b>H2 REFERENCE FUEL AND REFERENCE GASES .....</b>	<b>14</b>
6.1.	INTRODUCTION.....	14
6.2.	PURPOSE AND RESULTING REQUIREMENTS FOR REFERENCE GASES IN SUPPORT OF GTR FOR H2 VEHICLES.....	14
6.2.1.	<i>Checking purity (quality) of hydrogen for use as a propulsion fuel .....</i>	14
6.2.2.	<i>Monitoring of vehicle emissions .....</i>	15
6.2.3.	<i>Measurement of fuel consumption .....</i>	16
6.3.	REQUIREMENTS.....	17
6.3.1.	<i>Fuel quality for FC vehicles .....</i>	17
6.3.2.	<i>Emission monitoring for FC and ICE vehicles .....</i>	17
6.3.3.	<i>Fuel consumption (FC and ICE) .....</i>	17
6.4.	CONCLUSION AND RECOMMENDATION .....	18
6.5.	MEASUREMENT OF FUEL CONSUMPTION.....	18
6.5.1.	<i>Determination of mass change .....</i>	18
6.5.2.	<i>Flow rate measurement .....</i>	18

6.5.3.	<i>Method based on emission measurement</i> .....	18
<b>7.</b>	<b>POLLUTANT EMISSIONS OF HYDROGEN (H<sub>2</sub>) FUELLED VEHICLES</b> .....	<b>21</b>
7.1.	EXPLANATION AND SPECIFICATION OF THE ISSUE .....	21
7.2.	APPLICATION AND SCOPE.....	22
7.2.1.	<i>Vehicle categories</i> .....	22
7.2.2.	<i>Propulsion system</i> .....	22
7.2.3.	<i>Reformer (on vehicle)</i> .....	22
7.2.4.	<i>Fuel Types</i> .....	22
7.3.	DEFINITIONS .....	22
7.4.	OVERVIEW ON EXISTING REGULATIONS & STANDARDS.....	23
7.4.1.	<i>Passenger cars</i> .....	23
7.4.2.	<i>Heavy duty vehicles</i> .....	23
7.4.3.	<i>2/3 wheelers</i> .....	23
7.4.4.	<i>Reference Fuel and Reference Gas</i> .....	24
7.5.	WORK TO BE DONE AND STATE OF RESEARCH .....	24
7.6.	REGULATORY APPROACH.....	24
7.6.1.	<i>Need for regulation</i> .....	24
7.6.2.	<i>Open issues and need for specification</i> .....	24
7.6.3.	<i>Assessment of harmonisation - development of a GTR</i> .....	24
7.7.	REFERENCES .....	25
<b>8.</b>	<b>CARBON DIOXIDE (CO<sub>2</sub>) EMISSIONS OF HYDROGEN (H<sub>2</sub>) FUELLED VEHICLES</b> .....	<b>26</b>
8.1.	EXPLANATION AND SPECIFICATION OF THE ISSUE .....	26
8.2.	APPLICATION AND SCOPE.....	26
8.2.1.	<i>Vehicle categories</i> .....	26
8.2.2.	<i>Propulsion system</i> .....	27
8.2.3.	<i>Reformer (on vehicle)</i> .....	27
8.2.4.	<i>Fuel Types</i> .....	27
8.3.	DEFINITIONS .....	27
8.4.	OVERVIEW ON EXISTING REGULATIONS & STANDARDS.....	28
8.4.1.	<i>Passenger cars</i> .....	28
8.4.2.	<i>2/3 wheelers</i> .....	28
8.4.3.	<i>Reference Fuel and Reference Gas</i> .....	28
8.5.	WORK TO BE DONE AND STATE OF RESEARCH .....	28
8.6.	REGULATORY APPROACH.....	28
8.6.1.	<i>Need for regulation</i> .....	28
8.6.2.	<i>Open issues and need for specification</i> .....	29
8.6.3.	<i>Assessment of harmonisation - development of a GTR</i> .....	29
8.7.	REFERENCES .....	29
<b>9.</b>	<b>NOISE EMISSIONS</b> .....	<b>30</b>
9.1.	EXPLANATION AND SPECIFICATION OF THE ISSUE .....	30
9.2.	APPLICATION AND SCOPE.....	30
9.3.	DEFINITIONS .....	30
9.4.	OVERVIEW ON EXISTING REGULATIONS & STANDARDS.....	30
9.5.	WORK TO BE DONE AND STATE OF RESEARCH .....	30
9.6.	REGULATORY APPROACH.....	31
9.7.	REFERENCES .....	31
<b>10.</b>	<b>HARMONISATION ASSESSMENT IN THE AREA OF ENVIRONMENTAL AND ENERGETIC ASPECTS</b> .....	<b>32</b>
10.1.	FUEL CONSUMPTION.....	32
10.2.	FUEL QUALITY .....	32
10.3.	POLLUTANT EMISSIONS OF HYDROGEN (H <sub>2</sub> ) FUELLED VEHICLES .....	32
10.4.	CARBON DIOXIDE (CO <sub>2</sub> ) EMISSIONS OF HYDROGEN (H <sub>2</sub> ) FUELLED VEHICLES.....	32

10.5.	WATER EMISSIONS .....	33
10.6.	NOISE EMISSIONS .....	33
10.7.	SUMMARY AND CONCLUSIONS .....	33

**List of Figures**

Figure 1	International Standard and Regulation Bodies dealing with H <sub>2</sub> and FC vehicles	6
----------	--	---

**List of Tables**

Table 1	Areas that GTR should address for different vehicles.....	4
Table 2	Standards/Regulations existing, to be developed or to be adapted for application to Hydrogen and Fuel Cell Systems/Vehicles .....	12
Table 3	Adapted from HarmonHy WP4 Deliverable D4.1 – Industrial and societal needs – Sept. 2006 .....	20

## 1. INTRODUCTION

The UN ECE informal GRPE working group on hydrogen/fuel-fuel cell vehicles (GRPE-H2FCV) has been operative for several years now. In June 2005, WP.29/AC.3 agreed on a proposal by Germany, Japan and United States of America regarding how to **manage the development** process for a Global Technical Regulation (**GTR**) on hydrogen-powered vehicles. However because of different circumstances it was not until April 2007 that the group received a clear mandate and a roadmap in order to achieve its goal of establishing a GTR for this class of vehicles (ECE/TRANS/WP.29/AC.3/17). The following **premises** have to be kept in mind when defining the GTR:

1. The aim is to attain equivalent levels of safety as those for conventional gasoline powered vehicles;
2. The GTR shall be performance based and
3. The GTR shall not be restrictive for future technologies.

Given that hydrogen powered vehicle technology is still emerging, WP.29/AC.3 agreed that input from researchers is a vital component of this effort. Based on a comparison of existing regulations and standards of HFCV with conventional vehicles, the following has **to be investigated** and considered:

1. The **main differences** in safety and environmental aspects and
2. Which **items** need to be regulated and the **justification** behind it.

Under the agreed process, once AC.3 had developed and approved the action plan for the development of a GTR, two subgroups has been formed to address the safety and the environment aspects of the GTR:

- 1 The subgroup safety (**HFCV-SGS**) which is chaired by Japan and the USA reports to GRSP.
2. The environmental subgroup (**HFCV-SGE**) which is chaired by the European Commission (JRC) and reports to GRPE.

In order to ensure communication between the subgroups and continuous engagement with WP.29 and AC.3, the designated project manager (Germany) coordinates and manages the various aspects of the work ensuring that the agreed action plan is implemented properly and that milestones and timelines are set and met throughout the development of the GTR.

The GTR will cover fuel cell (FC) and internal combustion engine (ICE), compressed gaseous hydrogen (CGH<sub>2</sub>) and liquid hydrogen (LH<sub>2</sub>).

The **final goal** of the environmental informal sub-group (**HFCV-SGE**) is to investigate the possibility of harmonization of environmentally related requirements and to propose actions in those cases where harmonization might not be possible.

## 2. SCOPE

The present document summarises the findings by the SGE on the different areas addressed by the group and discusses whether it is adequate or not to support a harmonisation process on the environmental and energetic aspects of HFCV.

## 3. METHODOLOGY USED

The SGE has considered that a very practical way of going ahead might be the drafting of a technical report consisting of dedicated chapters for each of the areas of interest to the SGE with addressing the following points:

- a) explanation and specification of the issue
- b) overview of the existing Regulations / Standards and explanation of the possible existing links
- c) overview of the state-of-art
- d) ongoing/finalised research activities stating references on both cases; finalised projects and ongoing ones
- e) if further research is still needed, then specify what and why
- f) assessment of the harmonization:
  - is it needed?,
  - specify the harmonisation,
  - is it foreseeable (explain why),
  - reference list.

In particular, a common structure of the technical report (TR) was adopted and consisted of the following chapters:

1. Purpose / explanation:

This chapter will introduce the item, including a technical description, with a clear statement about the purpose of a regulation concerning the subject of the report (this chapter needs to bear a resemblance to the chapter "purpose" in each GTR).

2. Application / scope:

It will address the type of vehicle to which the report is dedicated: vehicle classes (SR1), propulsion system (FC, Hybrid, ICE) and fuels (mono, bi, flex ...).

3. Definitions (if any)

It will include only definitions deemed because of either it is needed to understand the TR chapter, or a controversial discussion in meetings show the need for clarification.

4. Regulations / directive / standards:

The chapter will give a brief but comprehensive overview about existing regulations, directives and standards (RCS?) together with those under development. The details on them need to be referenced in chapter 7 (see below).

5. State and review of research:

Brief and comprehensive overview about finalised and ongoing research pertinent to the chapter summarising their results and conclusions and pointing out any lack of research results needed. (References should be listed in 7)). If further research is needed for the development of a regulation, this chapter should also describe it.

6. Assessment of harmonisation:

This chapter should include, based on the information provided in chapters 1 to 5, a statement about possible harmonisation of requirements for a specific item under the 1998 agreement. If harmonisation seems not to be possible, other solutions can be suggested (e.g. an amendment of an existing ECE-Regulation).

7. References:

A list of references made to publications, regulations, standards etc. made in the previous chapters.

The technical reports dedicated to the different areas (see below) are an integral part of this document (chapters). Unfortunately not all the areas are supported by a technical report as no experts in that missing particular area were found although they were actively sought.

#### **4. ASPECTS ADDRESSED BY THE SGE**

The areas addressed within the field of competence of the SGE are aspects other than the ones addressed by SGS including energy and environmental considerations. The following is a list of the areas the group has addressed within its mandate:

1. Pollutant Emissions
2. Hydrogen and Water Emissions
3. Fuel Consumption
4. Recycling
5. FC Disposal / Hazardous Materials
6. Fuel Quality
7. Engine Power
8. Noise

One note of cautions needs to be indicated here, APUs (Auxiliary Power Units) are not part of the GTR, as it should only address FC and ICE engines running both with CFH<sub>2</sub> and LH<sub>2</sub> and it has not been included in AC3's action plan. It is also apparent that Electromagnetic Compatibility is a subject discussed in GRE for conventional vehicles.

Table 1 summarises the environmental and other energetic aspects that are pertinent to the different vehicles that the GTR should address.

**Table 1 Areas that GTR should address for different vehicles**

	<b>FC</b>	<b>Hybrid</b>		<b>ICE</b>
	H <sub>2</sub>	FC	ICE-H <sub>2</sub>	Mono fuel (H <sub>2</sub> ) Bi-fuel Blends Dual fuel
	<b>Environmental &amp; Energetic aspects</b>			
<b>Fuel Consumption</b>	x	x	x	x
<b>CO<sub>2</sub> emission</b>				Bi-fuel, blends & dual fuel
<b>External Electrical consumption</b>		x	x	
<b>Pollutant emissions</b>			x (NO <sub>x</sub> )	x
<b>H<sub>2</sub> &amp; H<sub>2</sub>O emissions</b>	x	x	x	x
<b>Engine Power (measurement Procedures)</b>	x	x	x	x
<b>Maximum speed (measurement Procedures)</b>	x	x	x	x
<b>Fuel quality (reference)</b>	x	x	x	x
<b>Recycling</b>	x	x	x	x
<b>Disposal (hazardous mat.)</b>	x	x	x	x
<b>Noise</b>	x	x	x	x



## **5. FUEL CONSUMPTION, EXTERNAL ELECTRICAL CONSUMPTION AND MAXIMUM SPEED MEASUREMENT**

### **5.1. Introduction**

This chapter is related to the Hydrogen use in vehicle application and relevant measurement of energy and operation performance of the vehicle and components.

The following applications are considered (out of the matrix previously established)

1. Fuel cell system: stack, components,
2. Fuel cell vehicles
3. Hybrid fuel cell vehicles
4. Hybrid H<sub>2</sub> - I.C.E. vehicles

For these applications, the following aspects are considered as appropriate:

- Fuel consumption
- External Electricity Consumption of Hybrid Vehicles
- Maximum speed

The scope of the chapter is to list and analyse the elements necessary to prepare harmonised standards/regulations on this matter and ultimately GTRS, starting from existing normative documents and data coming from research result.

The chapter addresses the following content:

- Overview of existing regulation, standards and possible links
- Overview of the state-of-art
- Missing standardisation topics
- Ongoing/finalised research activities relevant to the matter
- Possible further research needed

The following figure presents the International Standards and Regulation Bodies dealing with Hydrogen and Fuel Vehicles with the relevant fields of action and links.

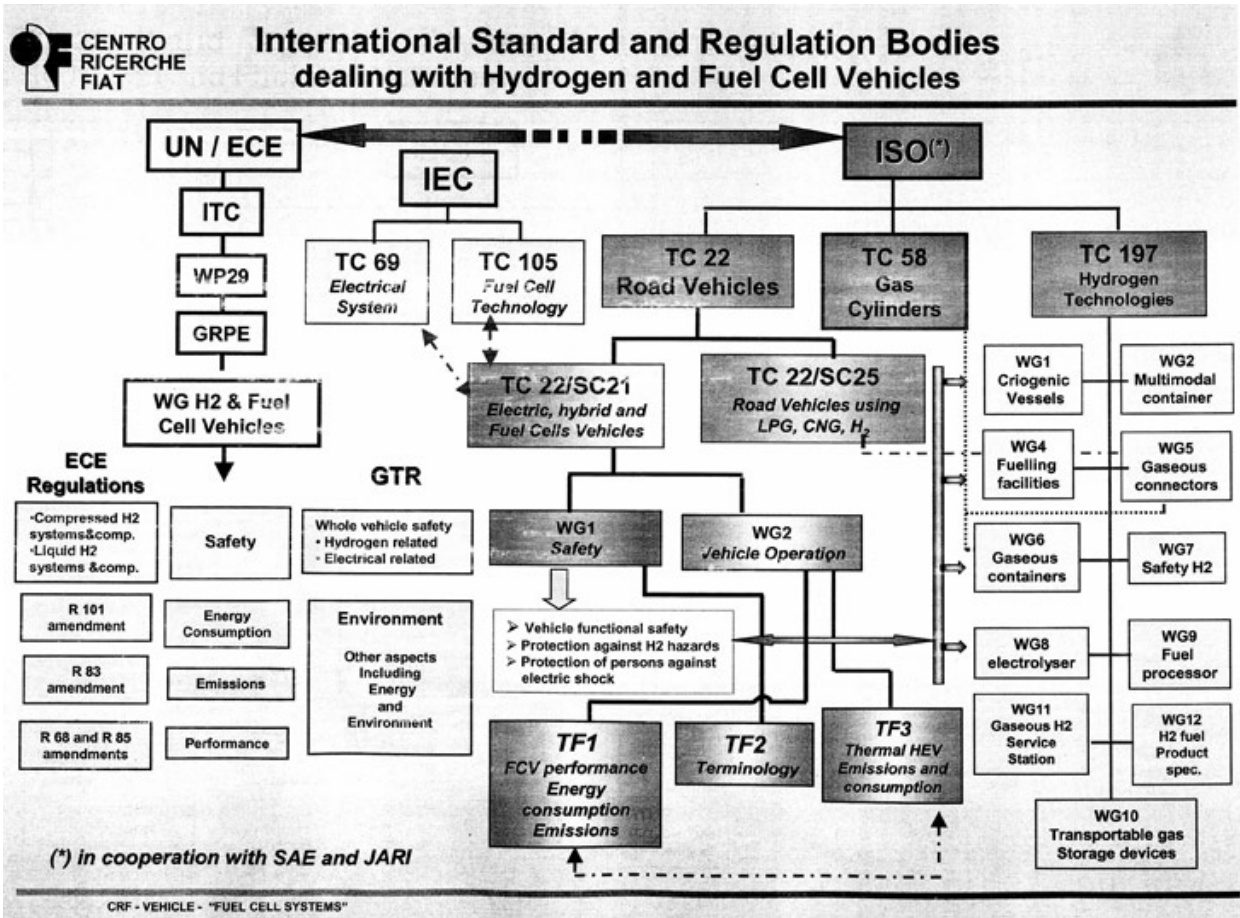


Figure 1 International Standard and Regulation Bodies dealing with H<sub>2</sub> and FC vehicles

## 5.2. Fuel consumption

### 5.2.1. Explanation and specification of the issue

In legislation the fuel consumption of Passenger Cars, Light Duty Vehicles and Motorcycles is tested on a roller test bench; for Heavy Duty Vehicles are tested on an engine test bench, following test cycle or steady state test.

National prescriptions provide specifications for test procedures and driving profile both for regulation and for standard.

Determination of fuel consumption is a fundamental issue for all vehicle categories, since it constitutes:

- an element required for certification/homologation
- a parameter for possible definition of taxation
- a common basis for comparing energy performance of different vehicles and different power train solutions
- a basis to determine the “Well To Wheel” energy effectiveness of the various solutions with respect to the primary energy source.

## **5.2.2. Application and Scope**

### **5.2.2.1. Vehicle categories**

In principle all vehicle categories defined in Special Resolution No.1 [1] can be powered by H<sub>2</sub>:

- passenger car (category 1-1 vehicle)
- bus (category 1-2 vehicle)
- truck (category 2 vehicle)
- 2 or 3 wheeler (category 3 vehicles)

### **5.2.2.2. Propulsion systems**

- Pure Fuel Cell Vehicle
- Fuel Cell Hybrid (Fuel Cell and Rechargeable Electric Storage) Vehicle
- Fuel Cell Systems and components: Stack (inherent characterization)
- I.C.E. – H<sub>2</sub> (I.C.E. fuelled by Hydrogen) Hybrid vehicle

## **5.2.3. Definitions**

The definition of the different propulsion systems and components should be based on those given in Standard, Regulation and Technical Report, with appropriate harmonization.

## **5.2.4. Overview on existing Regulation and Standard**

### **5.2.4.1. Fuel cell systems: Stack and Components**

Standards existing or under development by:

#### ISO/TC 197 Hydrogen technologies

ISO 14687: Hydrogen fuel-product specification

ISO 14687: Hydrogen fuel-product specification

Part 2: Proton exchange membrane (PEM) fuel cell application for road vehicles

#### IEC/TC 105 Fuel cell technologies

IEC 62282-1:2005 Fuel cell technologies - Part1: Terminology (published)

IEC 62282-2:2004 Fuel cell technologies - Part 2: Fuel cell modules (published)

IEC/CDV 62282-3-2 Fuel cell technologies - Part 3-2: Stationary fuel cell power plants - Test methods for the performance

IEC/PWI 62282-4 Fuel cell technologies - Part 4: Fuel cell system for propulsion and auxiliary power unit

#### SAE

SAE J2572: Recommended practice for measuring the fuel consumption and range of fuel cell powered electric and hybrid electric vehicles using compressed gaseous hydrogen (revised October 2008)

SAE J 2615 Reference test procedures of fuel cell systems for automotive application

SAE J 2616 Performance test procedures for the fuel processor systems for automotive application

SAE J 2617 Performance test procedures of PEM fuel cell stack subsystem for automotive application

SAE J2719: Information Report on the Development of a Hydrogen Quality Guideline for Fuel Cell Vehicles.

#### **5.2.4.2. Pure Fuel Cell Vehicles**

Existing Regulations/Standards:

- Regulation UN ECE R 101

The R 101 provides methods for consumption measurement of ICE vehicle, with carbon based fuel, battery electric vehicles and hybrid electric vehicles.

The structure is prepared to incorporate procedures for ICE vehicles fuelled with H<sub>2</sub> and fuel cell vehicles pure or hybrid.

A draft proposal was developed by the consortium of Companies (lead by RTWH-Aachen) acting on EU Programme FUEVA.

- Standard ISO 23828:

“Fuel Cell Road Vehicles-Energy Consumption measurement-Vehicles fuelled with compressed hydrogen”, developed by ISO/TC22/SC21.

This standard deals with the measuring methods of hydrogen and the procedures to test the vehicle.

The procedure prescribes the test on a chassis dynamometer.

The test consists of the vehicle preconditioning measurement over a reference driving schedule.

The running mode, including the dynamometer setting, is prescribed differently in the various Regions (Japan, Europe, and U.S.A.).

The prescribed methods are the following: (see Annex to the Standard)

1. Pressure method (normative)
2. Gravimetric method (normative)
3. Flow method (normative)
4. Current method (informative)

The three normative methods (pressure, gravimetric and flow) are considered equivalent, insofar they can produce results within a precision of  $\pm 1\%$ , according to the measurements done up to now.

They are left open according to the test tools of manufacturer and/or testing institution.

- Standards from ISO TC 197 “Hydrogen technologies”

ISO 14687:1999 / Cor. 1:2001 “Hydrogen fuel-Product specification”

ISO/TS 14687-2:2008 “Hydrogen fuel-Product specification- Part 2: Proton exchange membrane (PEM) fuel cell application for road vehicles (under revision)

ISO/DIS 16110-2 “Hydrogen generators using fuel processing technologies-Part 2: procedure to determine efficiency

#### **5.2.4.3. Missing standards**

Methods for consumption measurement of H<sub>2</sub> stored in liquid phase and in Metal Hydride tank.

Recommendation is given for development of these standards; insofar the technology is already in practical applications.

#### **5.2.4.4. Hybrid Fuel Cell Vehicles**

The standard ISO 23828 is applicable to Fuel Cell road vehicles in general, fuelled with compressed H<sub>2</sub>, both pure FC and Hybrids; the different procedures are put in evidence inside the standard.

A missing standard, to be possibly developed, is related to Fuel Cell Hybrid Vehicle-Energy consumption measurement- Externally chargeable vehicles (plug-in vehicles).

This standard should cover the procedure to measure both Hydrogen and Electricity for FC Vehicle plug-in, similarly to the standard for ICE Hybrid Electric Vehicles externally chargeable vehicles.

#### **5.2.4.5. ICE-H<sub>2</sub> Hybrid Vehicles**

The prescription for fuel consumption measurement of ICE-H<sub>2</sub> Hybrid Vehicles could be derived from those for Hybrid Electric road vehicles (ISO 23274) non externally chargeable, including the provisions for H<sub>2</sub> measurements as prescribed in ISO 23828.

#### **5.2.5. Overview of the state of art**

At the level of international standard, a standard ISO (TC 22/SC21) is presently under study, concerning the measurement of fuel consumption and emissions for Externally Rechargeable Hybrid Vehicles.

#### **5.2.6. On going finalised research**

The EU Programme FUEVA (lead by RTWH – Aachen) includes research related to test and validate on vehicle the procedures for hydrogen consumption measurement.

#### **5.2.7. Further research needed**

Research related to procedure for H<sub>2</sub> consumption measurement of H<sub>2</sub> stored in liquid phase or in Metal Hydride tank.

#### **5.2.8. Assessment of the harmonization**

The GTRs should be established consistently with common agreement on the topics.

Bases for GTRs could be standards and regulation (national or regional) existing or under development. The related content should be, therefore, harmonized on international basis.

### **5.3. External Electrical Consumption**

#### **5.3.1. Explanation and specification of the issue**

The external electrical consumption occurs for dual energy powered vehicles (H2 and electricity).

This is the case of either Fuel Cell Hybrid (battery electric with fuel cell electricity generator), or I.C.E.- H2 supplied Electric Hybrid.

#### **5.3.2. Application and scope**

##### **5.3.2.1. Vehicle categories**

In principle all vehicle categories defined in Special Resolution No.1 [1] can be involved:

- passenger car (category 1-1 vehicle)
- bus (category 1-2 vehicle)
- truck (category 2 vehicle)
- 2 or 3 wheeler (category 3 vehicles)

##### **5.3.2.2. Propulsion systems**

- Fuel cell hybrid (Fuel Cell and Rechargeable Electric Storage) Vehicle
- I.C.E. – H2 (I.C.E. powered by Hydrogen) Hybrid

#### **5.3.3. Overview on existing Regulation and Standard**

##### **5.3.3.1. Fuel Cell Hybrid Vehicles**

For Passenger Cars and Light Duty Vehicles regulation UN ECE R101 provides methods for consumption measurement of ICE Vehicles, with carbon based fuel, Battery Electric and Hybrid Electric Vehicles. The structure could incorporate Fuel Cell Vehicles Hybrid Vehicles

The external electricity consumption for hybrid vehicles can be derived from procedures included in the standard ISO under development related to Hybrid-Electric road vehicles externally chargeable (plug-in Hybrid), which is presently under development (ISO/WD 23274-2).

### **5.4. Maximum speed measurement – Engine Power measurement**

#### **5.4.1. Explanation and specification of the issue**

The measurement of the maximum speed for electric vehicles is subject to the consideration of the performance variation with the State Of Charge of the battery and with the thermal status of the electric motor.

For these reasons, standard prescriptions exist to consider, for vehicle characterization, the top speed and the maximum 30 min. speed.

Similar provisions exist for the measurement of the engine power.

## **5.4.2. Application and scope**

### **5.4.2.1. Vehicle categories**

In principle all vehicle categories defined in Special Resolution No.1 [1] can be involved:

- passenger car (category 1-1 vehicle)
- bus (category 1-2 vehicle)
- truck (category 2 vehicle)
- 2 or 3 wheeler (category 3 vehicles)

### **5.4.2.2. Propulsion system**

- Pure Fuel Cell Vehicles
- Fuel Cell Hybrid Vehicles
- I.C.E. – H2 Hybrid Vehicles

## **5.4.3. Overview on existing Regulation and Standard**

A technical report has been recently developed by ISO TC 22/SC 21, regarding Fuel Cell Vehicles maximum speed (pure and hybrid).

This TR, which is presently being issued, is based on the harmonisation of the following documents

- UN ECE Regulation R68- Amendment 1: Uniform provisions concerning the approval of power-driven vehicles including pure electric vehicles with regards to the measurement of the maximum speed
- ISO 8715: Electric Road Vehicles-Road operating characteristics

For ICE-H2 Hybrid Vehicle, the maximum speed measurement could be done following the general provision of R 68.

### **Engine Power**

Regulation UN ECE R.85 prescribes test for maximum power and maximum 30 min power for electric vehicles.

## **5.5. Reference documents**

Fuel quality and terminology are topics which should be considered for all applications.

The relevant documents are reported in table 2.

**Table 2 Standards/Regulations existing, to be developed or to be adapted for application to Hydrogen and Fuel Cell Systems/Vehicles**

Topic		H2 Stack and Components APU Generating Unit	FC(pure)Vehicle	FC Hybrid Vehicle	I.C.E.-H2 Hybrid Vehicle
Fuel Consumption		<p><b>IEC 62282-2 (2004)</b>  <b>SAE 2617</b>  <b>ISO 14687</b> Hydrogen Fuel-product specification-                      Part 2 Proton exchange membrane (PEM)  <b>ISO 13985</b> Liquid Hydrogen Land Vehicles Fuel Tanks  <b>ISO/TS 16111 (2006)</b> Transportable gas storage devices-Hydrogen absorbed in reversible metal hydrid.</p>	<p><b>ISO 23828</b> Fuel Cell road Vehicles-Hydrogen consumption measurement                      -Vehicles fuelled with compressed H2                      To be developed: -Vehicles fuelled with liquid H2                      To be developed: -Vehicles fuelled with H2 absorbed in MH  <b>R101</b> (to be adapted for FC Vehicles inclusion)</p>	<p>To be developed:                      Fuel Cell Hybrid Vehicle-Energy consumption measurement-Externally chargeable vehicles.</p>	<p><b>R101</b> (Applicable for fuel consumption to ICE Hybrid, to adapted for H2 use)</p>
External Electrical Consumption		-	-	<p><b>ISO/WD 23274-2</b> Hybrid- electric road vehicles-exhaust emissions and fuel consumption measurements –                      Part 2: Externally chargeable vehicles(under development to be assumed as guideline).</p>	<p><b>ISO 23274</b> Hybrid-electric road vehicles exhaust emission and fuel consumption measurements non externally chargeable vehicle.                      (to be adapted for H2 use)  <b>R101</b> (to be adapted).</p>
	Maximum speed	-	<p><b>ISO</b> Technical Report (TR) FC Vehicles                      Maximum speed (being issued)  <b>ISO 8715</b> Electric Road Vehicles-Road operating characteristics.  <b>R68</b>-Amend .1 Uniform provisions concerning the approval of power-driven vehicles including pure electric vehicles with regards to the measurement of the maximum speed.</p>	<p><b>R68</b> Uniform provisions concerning the approval of power-driven vehicles with regard to the measurements of the maximum speed</p>	



<b>Performance</b>	<b>Engine Power</b>	<b>IEC/CDV 62282-3-2</b> Stationary fuel cell power plants-test method for the performance	<b>R 85</b> Annex 6 Amend:2,8,4 Maximum power and maximum 30 min. power for Electric Vehicles	To be developed (as well as for ICE Hybrid electric)	To be developed (as well as for ICE Hybrid electric)
<b>Fuel quality (reference)</b>		<b>ISO 14687 (2008)</b> Hydrogen Fuel-Product specification	<b>ISO 14687</b>	<b>ISO 14687</b>	<b>ISO 14687</b>
<b>Terminology (reference)</b>		US Fuel Cell Council Fuel Cell Glossary <b>IEC/TC 62282-1 (2005)</b> Terminology	<b>ISO Draft Technical Report(TR) on SC 21 Vocabulary</b> <b>ISO 8713</b>		-

### **5.6. References**

[1] Special Resolution No.1, concerning the common definitions of vehicle categories, masses and dimensions (S.R.1); TRANS/WP.29/1045

## 6. H<sub>2</sub> REFERENCE FUEL AND REFERENCE GASES

### 6.1. Introduction

This document is a scoping paper on the need and feasibility for a hydrogen reference fuel and for other reference gases in the context of the establishment of a GTR for H<sub>2</sub>-powered vehicles. As agreed at the 3rd meeting of the Subworking Group Environment of the Informal UN-ECE Informal GRPE Working Group on Hydrogen Fuel Cell Vehicles (H2SGE-03-WP-02), JRC would initiate such a scoping paper.

The discussions during the meeting identified that reference gases could potentially be relevant and useful in three areas covered by the GTR: fuel quality, emissions and fuel consumption. The question was raised to what extent these different applications resulted in different requirements for a reference gas.

The purpose of the present document is not to provide an overview of ongoing standardisation and regulatory activities worldwide on these three topics or of the supporting R&D activities.

### 6.2. Purpose and resulting requirements for reference gases in support of GTR for H<sub>2</sub> vehicles

#### 6.2.1. Checking purity (quality) of hydrogen for use as a propulsion fuel

- 1.1. H<sub>2</sub> purity (quality) is an issue in FC vehicles, much less in H<sub>2</sub>-ICE vehicles. At present, only PEM type FC are considered for propulsion applications in passenger cars and light vehicles. Impurities in the reactants (both in hydrogen at the anode, but also in air/oxygen at the cathode) affect the catalyst performance and hence the electrochemical reactions as well as the membrane properties.
- 1.2. Impurities in the H<sub>2</sub> fuel depend primarily on the H<sub>2</sub> production method, although the storage method and medium may also play a part. The most important contaminants in H<sub>2</sub> produced by natural gas reforming (the most commonly used production method) are CO, sulphur containing compounds (H<sub>2</sub>S in particular), nitrogen containing compounds (NH<sub>3</sub>), and unsaturated and aromatic hydrocarbons.
- 1.3. To enable calibration of equipment for impurity analysis, a reference gas containing specified impurities/contaminants in an otherwise pure H<sub>2</sub> matrix (i.e. carrier gas) is needed
- 1.4. According to consulted metrology institutes the production of such a reference gas (reference fuel) is technically feasible, but stability and conservation/storage period require attention and investigations.
- 1.5. If H<sub>2</sub> is not only used for propulsion but also for APU (for which a different type of fuel cell may be used), other purity requirements will prevail. However, because only one kind of H<sub>2</sub> is expected to be stored on board, the most stringent requirements (corresponding to PEMFC for propulsion) will apply.
- 1.6. In the context of GTR such a reference fuel is not needed for vehicle certification *per se*, but for reducing the impact of fuel-dependent factors on

vehicle performance aspects covered by the GTR, such as emissions and fuel consumption. When the H<sub>2</sub> used during the vehicle certification test complies with the fuel quality specifications the variability in test results is considerably decreased, allowing more accurate verification of true performance.

- 1.7. In the context of GTR a H<sub>2</sub> reference fuel should be globally recognised (which would be achieved by a certification according to international standards, such as ISO Guide 34 and corresponding equivalence studies)

### **6.2.2. Monitoring of vehicle emissions**

- 2.1. Vehicle certification requires measurement of tail-pipe emissions during a test cycle. This necessitates the use of calibrated emission monitoring equipment.
- 2.2. Measurement of tail-pipe emissions from fossil fuelled ICE vehicles uses a constant volume sampling (CVS) system that compensates for load variations during the test cycle by maintaining a constant total flow rate of vehicle exhaust plus dilution air. The diluted exhaust is collected and the concentrations of emission products CO, CO<sub>2</sub>, HC and NO<sub>x</sub> are determined (g/km).
- 2.3. When using H<sub>2</sub> as a fuel, either in FC or ICE, the emissions are much lower than those from conventional ICE vehicles or simply there are not present (i.e. FC except H<sub>2</sub>O). This requires additional measures to ensure accuracy of emission measurement and calibration of the emission monitors.
- 2.4. The major emission product from H<sub>2</sub> powered vehicles is water vapour. The associated humidity may affect the accuracy of measurement of pollutants (e.g. non-dispersive infra-red analysers for CO and CO<sub>2</sub> are known to be sensitive to H<sub>2</sub>O).
- 2.5. Emissions from H<sub>2</sub>-vehicles powered by FC are different from those with ICE, because different purity requirements and hence impurity contents of the fuel. For ICE additional emissions are NO<sub>x</sub> from the combustion of the air-fuel mixture as well as carbon compounds from engine lubrication (UHC, CO, CO<sub>2</sub>).
- 2.6. For the calibration of the different types of emission monitors reference gases are needed. Because of the lower emission levels to be measured these must have a higher purity than those for calibration of emission measurement equipment for conventional ICE vehicles. This also applies for the gases used as "zero-gas" in analysers based on differential measurement (e.g. NDIR).
- 2.7. When instead of total emissions over the test cycle ("bag" measurement) emissions are measured instantaneously on a second-by-second basis ("modal" measurement) (e.g. to assess performance of catalyst and engine system at a particular time in the cycle), the instantaneous exhaust mass flow rate must be determined. This represents a serious technical challenge.

In this case also more stringent requirements apply for the emission monitors (e.g. response time).

### **6.2.3. Measurement of fuel consumption**

- 1.8. Vehicle certification requires measurement of fuel consumption during a test cycle. For H<sub>2</sub>-powered vehicles a number of methods have been and are under investigation (see Annex I). Each of these methods has disadvantages.
- 1.9. The need for harmonisation of fuel consumption measurement procedures in the context of the GTR is addressed in the previous technical report to SGE (Technical Report I). The present document therefore focuses on the potential role that reference gases could play in this respect.
- 1.10. In the context of a GTR, the use of a single universally accepted method definitely provides added value. Moreover, for reasons of economy, efficiency and comparability with certification of non-H<sub>2</sub> powered vehicles, the use of an "elemental balance" method as for conventional ICE vehicles (carbon-balance) that does not require vehicle modifications, presents huge advantages.
- 1.11. This is achieved by using the so-called Hydrogen-Balance method which measures the hydrogen-containing compounds H<sub>2</sub>O (non-dispersive infra-red analyser) and unburned H<sub>2</sub> (sector field mass spectroscopy) from the FC or ICE exhaust. The method requires some modifications to the testing procedures and system that are used for conventional ICE vehicles (as explained in Annex I).
- 1.12. Because they are based on the same measurement principle, fuel consumption and emission monitoring have similar requirements for equipment calibration. Hence, the above considerations on the use of reference gases for calibration of low-level emission monitors also apply for H<sub>2</sub> fuel consumption measurement. Extra requirements originate from the use of additional H<sub>2</sub>O and H<sub>2</sub> analysers. Because the expected concentration of H<sub>2</sub> in the exhaust is very low, the H<sub>2</sub> sensor can be calibrated using a readily available appropriate reference gas. However calibration of the H<sub>2</sub>O NDIR analyser calibration requires a dedicated humidification system.
- 1.13. For FC vehicles an Oxygen-Balance method based on measurement of the oxygen concentration in the exhaust has also been proposed. The method is not directly based on mass conservation, but on the measurement of a relatively small decrease in oxygen concentration between the inlet and outlet of the fuel cell stack, which requires a high accuracy of the oxygen analyser.
- 1.14. For FC vehicles, measurement of electrical current generated by the FC can also be translated into H<sub>2</sub> consumption. However internal losses from hydrogen leaks and cross-over, while definitely contributing to consumption, are not captured by such a measurement.

### **6.3. Requirements**

The implementation in the context of the GTR of harmonised fuel quality, emission and fuel consumption measurements translates into the following needs for further R&D and technical requirements for reference gases:

#### **6.3.1. Fuel quality for FC vehicles**

Issue: tolerance level of impurities to limit degradation of performance to acceptable level

Need: pre-normative research into

- test methods for quantifying performance under dynamic conditions reproducing typical driving cycles
- reliable detection and quantification of impurities in gaseous H<sub>2</sub>, including validation of high-pressure sampling methods
- understanding and quantifying the effect of impurities (single as well as multi-constituent) on FC performance and determination of acceptable level of impurities

Implications for feasibility of reference fuel:

- identification of type and amount of impurities in hydrogen carrier gas
- investigate stability and conservation/storage period

#### **6.3.2. Emission monitoring for FC and ICE vehicles**

Issue: measurement challenges related to high water vapour and low emissions of other pollutants

Need: pre-normative research into

- low-cost and reliable analysis methods and emission monitors
- calibration of sensors

Implications for feasibility of reference gases:

- calibration of emission analysers at low detection ranges requires higher purity levels in the reference gas than for conventional ICE vehicles

#### **6.3.3. Fuel consumption (FC and ICE)**

Issue: same as for emission monitoring

Need: additional pre-normative research into

- Further validation of hydrogen-balance approach and equations for different vehicle types
- Cost-effective calibration method for H<sub>2</sub>O detectors

Implications for feasibility of reference gases:

- need for dedicated reference gas(es?) allowing calibration of H<sub>2</sub>O detectors over wide H<sub>2</sub>O range
- for calibration of H<sub>2</sub> detectors: none (e.g. 0.5% H<sub>2</sub> in N<sub>2</sub>).

#### **6.4. Conclusion and Recommendation**

International collaboration in pre-normative research as well as close interaction with international standardisation bodies aimed at harmonisation of test requirements, of test methods and of test equipment performance for fuel quality, emission and fuel consumption measurement can greatly contribute to the establishment of the GTR. This should also include the development and certification of a reference fuel and gases for these three applications according to ISO standards which would ensure their global recognition.

#### **6.5. Measurement of Fuel Consumption**

Fuel consumption is defined as the mass amount of fuel used by a vehicle in a prescribed test cycle, expressed in g/km. In principle, three methods exist for experimentally determining gaseous H<sub>2</sub> consumption in FC or ICE-vehicles: (i) determination of fuel mass change in the container before and after test, (ii) determination of H<sub>2</sub> flow rate and (iii) measuring the concentration of relevant species in the exhaust with subsequent back-calculation to fuel consumption. A compilation of available methods is given in table 3.

Methods (i) and (ii) require a test vehicle to be supplied with hydrogen from an external, rather than the onboard tank. This requires dedicated live hydrogen feeds during testing and adjustment of various components in the test vehicle (with associated safety implications). These methods are also not suitable for vehicles with liquid hydrogen storage.

##### **6.5.1. Determination of mass change**

Mass change is measured statically before and after the test, either by weighing the fuel tank with its H<sub>2</sub> contents, or by determining the equilibrium temperature and pressure before and after testing in a storage tank of known volume (PVT). The former method suffers from the disadvantage that the weight of H<sub>2</sub> is very small compared to that of the tank, resulting in low measurement accuracy. PVT measurement needs also less instrumentation and test personnel, and hence potentially offers higher repeatability and lab-to-lab reproducibility. It requires use of a standardised equation for hydrogen density as a function of temperature and pressure.

##### **6.5.2. Flow rate measurement**

This type of measurement allows determining the instantaneous flow rate of hydrogen. Different measurement principles exist: mechanical, optical, thermal, ultrasonic, Coriolis, etc. They all require an intervention to the fuel supply line which can introduce inaccuracies. Also dedicated signal treatment and analysis equipment is needed for all but the simplest flow meters.

##### **6.5.3. Method based on emission measurement**

At present, US-EPA only accepts weighing, PVT and Coriolis mass flow according to SAE J2572 for the determination of H<sub>2</sub> gas fuel consumption in fuel cell and fuel cell hybrid vehicles. Adaptation of a method based on emission measurements to determine fuel consumption in conventional ICE vehicles receives increasing attention. It uses identical equipment as for emission measurement and works on the

conservation of mass principle: what goes into the engine or fuel cell must come out as exhaust components. This measurement of fuel consumption does not require direct contact with the fuel, which contributes to enhanced accuracy and simplicity.

For gasoline- and diesel-fuelled ICE vehicles the Carbon-Balance method is used. The total amount of carbon in the exhaust must have gone in as fuel (C-containing species in the exhaust from non-fuel sources are much lower than from the fuel and are hence neglected). The measured concentrations of C-containing species (CO, CO<sub>2</sub>, THC) in the diluted exhaust volume that is collected during the test cycle are calculated into a fuel consumption for the particular test cycle.

For H<sub>2</sub>-powered vehicles, a Hydrogen-Balance method (sometimes also called water-balance) is applied, which measures the hydrogen-containing compounds H<sub>2</sub>O (non-dispersive infra-red analyser) and unburned H<sub>2</sub> (sector field mass spectroscopy) from the exhaust. This method requires some modifications to the testing procedures and CVS system that are used for conventional ICE vehicles. These arise mainly from two factors:

- It must be ensured that all H<sub>2</sub>O present in the exhaust is effectively measured. This requires avoiding condensation on cold parts (e.g. vehicle exhaust pipe at cold starts, exhaust gas lines to monitor) and diffusion of H<sub>2</sub>O from the exhaust into the dilution pipe.
- H<sub>2</sub>O in the exhaust may originate from other sources than oxidation of the H<sub>2</sub> fuel, namely the humidity in the environment (motor intake) and in the dilution air, which must not only be known but also remain constant during the test cycle

When the above points are appropriately addressed, the fuel consumption determined by the Hydrogen-Balance method agrees with the results obtained by the three EPA-recognised methods (SAE Paper 2008-01-1038). The method works for FC as well as for ICE vehicles.

**Table 3 Adapted from HarmonHy WP4 Deliverable D4.1 – Industrial and societal needs – Sept. 2006**

Test method	Description	Advantages	Disadvantages and issues
Carbon balance method	Derived from exhaust gas, carbon content in fuel and exhaust gas are the same	Simultaneous measurement during exhaust gas test Vehicle remodelling unnecessary	N/A for direct hydrogen FCV
Flow method	Direct measurement using flow meter	Field-proven for Internal combustion engine vehicles	Vehicle remodelling needed Verification of flow meters
Electrical current method	Calculated from electrical current generated in the fuel cell	Current easily measured from output wiring of the fuel cell	Gas crossover and leak Measurement of H <sub>2</sub> purge
Hydrogen balance method	Derived from exhaust gas, H <sub>2</sub> content in fuel and exhaust gas are the same	Simultaneous measurement during exhaust gas test Vehicle remodelling unnecessary	H <sub>2</sub> balance complicated Difficult to measure
Oxygen balance method	Measuring the decline in O <sub>2</sub> concentration in exhaust gas	Simultaneous measurement during exhaust gas test Vehicle remodelling unnecessary	Decline in O <sub>2</sub> is low Accuracy of oxygen analyzer
Pressure method	Calculated from press. / temp. change of fuel container	Easily to measurement Support H <sub>2</sub> purge	Limited to a high pressure container to store fuel
Weight method	Calculated from weight change of fuel container	Direct and simple Support H <sub>2</sub> purge	N/A for onboard measurement Connecting to gas line



## **7. POLLUTANT EMISSIONS OF HYDROGEN (H<sub>2</sub>) FUELLED VEHICLES.**

### ***7.1. Explanation and Specification of the issue***

In legislation the emissions of gaseous pollutants carbon monoxide (CO), hydro carbons (HC), oxides of nitrogen (NO<sub>x</sub>) and the emissions of particulate matter (PM) are limited in g/km or g/kWh. Light Duty Vehicles (LDV) and motorcycles are tested on a roller test bench, engines of Heavy Duty Vehicles (HDV) (and comparable engines of other vehicles) are tested on an engine test bench, driving a transient test cycle or steady state test. This test procedure including the test cycle is different for vehicle categories and in national legislation. The concentrations of the emissions are measured and then calculated in g/km or g/kWh.

Evaporative and low temperature emissions (requirements in ECE-R 83 [9]) are only related to gasoline engines and not relevant for H<sub>2</sub> as fuel.

Fuel cell vehicles don't emit one of the above mentioned pollutants, if H<sub>2</sub> is used directly. A fuel cell can also be fuelled with H<sub>2</sub>, that was reformed (on vehicle) from a different base fuel ( C<sub>x</sub>H<sub>y</sub> ). In case of a reformer (on vehicle), pollutant emissions are relevant, depending on the base fuel and the reforming process.

Theoretically the only component emitted by internal combustion engines (ICE) fueled with H<sub>2</sub> is NO<sub>x</sub>. The level of NO<sub>x</sub> emissions is depending on the air-H<sub>2</sub> ratio, respectively exhaust gas temperature and the layout of the aftertreatment system (e.g. catalyst). The use of H<sub>2</sub> is possible in positive- and compression ignition engines.

In cases where H<sub>2</sub> is used together with other fuels (H<sub>2</sub>-bi-fuel, H<sub>2</sub>-flex-fuel, H<sub>2</sub>-dual-fuel), all the other pollutants become relevant. H<sub>2</sub>-bi-fuel systems (BMW) or hydrogen mixtures (e.g. with CNG, [4]) are interesting solutions during the introduction phase of H<sub>2</sub> vehicles, until the infrastructure with H<sub>2</sub> fuelling stations is more developed. For the time being BMW and Mazda (LDV) and MAN (buses, HDV) are the only manufacturers producing vehicles with ICE using H<sub>2</sub> as fuel. It can be assumed that the level of the pollutant emissions of the three above mentioned vehicles are below the mandatory limit values.

The level of NO<sub>x</sub> emissions of H<sub>2</sub>-fuelled ICE is averaged by 2 - 30 % of the existing mandatory limits of NO<sub>x</sub> in Europe and USA [10]. The level of the other pollutants is nearly zero. Theoretically they should be equal to zero, but practically the small amount of emissions are caused by lube oil losses, or in case of H<sub>2</sub>-bi-fuel concepts, because the injection of the other fuel is pre-activated during H<sub>2</sub>-fuel mode.

H<sub>2</sub> can be stored liquid (LH<sub>2</sub>) or compressed gaseous (CGH<sub>2</sub>). The influence on pollutant emissions by the type of storage is not relevant. The only need is to define different reference H<sub>2</sub>-fuel and reference H<sub>2</sub>-gas for emission testing.

Engines and fuel cells are emitting also non limited components, e.g. ammonia, hydrocyanic acid, organic amine, aldehyde, sulfur dioxide. Today there is no evidence that ICE and fuel cells are emitting any non limited component, that causes serious environmental or health problems.

## **7.2. Application and Scope**

### **7.2.1. Vehicle categories**

In principle all vehicle categories defined in Special Resolution No.1 [1] can be powered by H<sub>2</sub>:

- passenger car (category 1-1 vehicle)
- bus (category 1-2 vehicle)
- truck (category 2 vehicle)
- 2 or 3 wheeler (category 3 vehicle)

Also possible, is the use of H<sub>2</sub> in agricultural and forestry tractors [2] and Non Road Mobile Machinery (NRMM) [3]. Today there is not big interest for marketing of such solutions. Therefore these vehicle categories will not be further covered by this report - out of scope.

### **7.2.2. Propulsion system**

Internal combustion engine (ICE), positive or compression ignition, or in combination with an electric engine (Hybrid Electric Vehicle).

Also possible, but not developed for the time being, is a combination of ICE and Fuel Cell (Hybrid Vehicle) - out of scope.

### **7.2.3. Reformer (on vehicle)**

For the time being it's improbable that a vehicle in serial production will be equipped with reformer technology. Furthermore a procedure to measure the pollutant emissions from the reformer process is not defined. Therefore this technology will not be further covered by this report - out of scope.

### **7.2.4. Fuel Types**

- H<sub>2</sub>-fuel
- H<sub>2</sub>-bi-fuel with gasoline, diesel, CNG or LPG
- H<sub>2</sub> blend/mixture (flex-fuel / dual-fuel) with gasoline, diesel, CNG or LPG
- H<sub>2</sub> reformed (on board) from gasoline, diesel, LPG, CNG, methanol - out of scope (see chapter 2.3.)

## **7.3. Definitions**

“Calculation method” - means the calculation method of mass emissions of pollutants, e.g. defined in appendix 8 of ECE-R 83 [9].

“Reference fuel / Reference gas” – means the definition of specifications of the fuel (LH<sub>2</sub>) or gas (CGH<sub>2</sub>) taken for the emission tests.

“H<sub>2</sub>-fuel-vehicle” – means a vehicle that primarily runs on H<sub>2</sub> but may also have a petrol system for emergency purposes or starting only, where the petrol tank does not contain more than 15 litres of petrol.

(this definition is in line with the definition of "mono fuel gas vehicle" in [13])

“H<sub>2</sub>-bi-fuel vehicle” means a vehicle that can run part-time on H<sub>2</sub> and also part time either on gasoline, diesel, LPG or CNG

"Flex-fuel vehicle" - means a vehicle with one fuel storage system that can run on different mixtures of two or more fuels [13].

"Dual-fuel vehicle" – means a vehicle with two storage systems for different fuels, where the both fuels are mixed either in the intake system or during injection into the combustion chamber.

“Hybrid vehicle” - means a vehicle with at least two different energy converters and two different energy storage systems (on vehicle) for the purpose of vehicle propulsion [9], [13]. ([9] and [13] also contains a definition for a “hybrid electric vehicle”).

## **7.4. Overview on existing Regulations & Standards**

### **7.4.1. Passenger cars**

The legislation concerning pollutant emissions from category 1-1 vehicles is not harmonised. Different test cycles, measurement methods, reference fuels and limit values are applicable. None of the existing Regulations includes test methods and requirements for H2 vehicles (ICE). The current European Euro 5/6 Regulation [13] already mentions H2 as fuel, but specific test procedures for H2 will be defined at a later stage.

A (possible) GTR project to develop a worldwide harmonised light vehicles test procedure (WLTP) is under preparation [5]. The documentation in [5] includes a comprehensive overview of the existing national legislation on pollutant emissions. Currently the emission measurement of H2 vehicles is not included in the draft roadmap.

ECE-R 83 [9] contains requirements regarding the pollutant emissions for mono-fuel and bi-fuel vehicles (gasoline, diesel, CNG, LPG). ECE-R 83 will be amended soon to be in line with the European Euro 5/6 requirements [13], including an approach for flex fuel (gasoline and Ethanol).

### **7.4.2. Heavy duty vehicles**

With GTR No. 4 [6], a world wide harmonised emission test procedure for heavy duty vehicles is established (category 1-2 and category 2 vehicles). The Appendix to GTR No. 4 (Technical Report) [6] includes an overview about the existing national emission legislation for heavy duty vehicles and relevant standards. Harmonised performance requirements are not included in GTR No. 4 for the time being. H2 vehicles are not covered by GTR No.4.

### **7.4.3. 2/3 wheelers**

With GTR No. 2 [7], a world wide harmonised emission test procedure for 2-wheeled motorcycles is established. The Appendix to GTR No. 2 (Technical Report) [7] includes an overview about the existing national emission legislation for 2-wheelers and relevant standards. Performance requirements (limit values) are not included at the moment, but AC.3 mandated the WMTC informal group to develop a proposal for the harmonisation of limit values. H2 vehicles are not covered by GTR No.2.

The legislation concerning pollutant emissions from mopeds (< 50 ccm, < 50 km/h) and three wheelers is not harmonised. Different test cycles, measurement methods, reference fuels and limit values are applicable. None of the existing Regulations includes test methods and requirements for H2 vehicles (ICE).

#### **7.4.4. Reference Fuel and Reference Gas**

The international standards ISO 14687 [8] and SAE J2719 [11] defines specifications for H<sub>2</sub> as fuel. On this basis a reference fuel and reference gas can be defined for the purpose of H<sub>2</sub> consumption measurement as well as for the purpose of measurement of NO<sub>x</sub> emissions. The issue of reference fuel and reference gas is described in more detail in Technical Report II [12].

A specification for H<sub>2</sub> as either flex-fuel or dual-fuel does not exist for the time being.

#### **7.5. Work to be done and state of research**

- A calculation method for NO<sub>x</sub> emissions from ICE fuelled with H<sub>2</sub> needs to be developed.
- Concerning H<sub>2</sub>-flex-fuel and H<sub>2</sub>-dual fuel, experience and emission test data are required for the development of a regulatory approach. This includes work on specification of reference fuel (s) and the definition of a calculation method (emissions).

#### **7.6. Regulatory approach**

##### **7.6.1. Need for regulation**

NO<sub>x</sub> emissions of vehicles with ICE using H<sub>2</sub>-fuel and pollutant emissions of H<sub>2</sub>-bi-fuel vehicles should be regulated. The level of limit values will be decided by national regulatory decision processes, but probably the limit values will be the same as for conventional vehicles.

##### **7.6.2. Open issues and need for specification**

- Definition of H<sub>2</sub> reference fuel and gas, if possible accepted worldwide and applicable for all vehicle categories.
- Definition of the regulatory approaches (e.g. worst case, measurement with both fuels) for H<sub>2</sub>-bi-fuel vehicles (and H<sub>2</sub>-flex-fuel, H<sub>2</sub>-dual-fuel).
- If needed, a definition for a H<sub>2</sub>-bi-fuel vehicle, to separate clear from H<sub>2</sub>-flex-fuel or H<sub>2</sub>-dual-fuel.

##### **7.6.3. Assessment of harmonisation - development of a GTR**

In the case of HDV and 2-wheeled motorcycles a world wide harmonisation is possible, because GTR's for the measurement of pollutant emissions already exists. This is not the case for LDV, and the development of a world wide harmonised test cycle and measurement procedure especial for LDV using H<sub>2</sub> in ICE is not efficient and feasible.

In the case of motorcycles or HDV with ICE using H<sub>2</sub> which are ready for marketing, an amendment of GTR No. 2 (WMTC) or GTR No. 4 (WHDC) can easily be developed. Such amendments of the existing GTR's only need the definition of the reference fuel, the calculation method for NO<sub>x</sub> (H<sub>2</sub>-fuel) and the definition of the H<sub>2</sub>-bi-fuel approach. This can be considered as a mid-term activity for both vehicle categories.

For LDV it should be considered to introduce a reference fuel (gas), a calculation method for the NO<sub>x</sub> emissions and the definition of the H<sub>2</sub>-bi-fuel approach with the WLTP GTR [5]. In the meantime, existing national legislation or ECE-R 83 can be amended.

As a conclusion, it is not proposed to develop a special GTR for the measurement and limitation of pollutant emissions of H2 vehicles.

### **7.7. References**

- [1] Special Resolution No.1; Concerning the common definitions of vehicle categories, masses and dimensions (S.R.1); TRANS/WP.29/1045
- [2] Consolidated Resolution of the construction of vehicles (R.E.3); Annex 7; TRANS/WP.29/78/Rev.1
- [3] NRMM - GTR development;  
[http://www.unece.org/trans/main/wp29/wp29wgs/wp29grpe/nrmm\\_mtnng\\_minutes.html](http://www.unece.org/trans/main/wp29/wp29wgs/wp29grpe/nrmm_mtnng_minutes.html)
- [4] Regulation (EC) no 79/2009; Official Journal of the European Union; L 35/32
- [5] WLTP - GTR roadmap phase;  
<http://www.unece.org/trans/main/wp29/wp29wgs/wp29grpe/wltp01.html>
- [6] GTR No. 4; Worldwide harmonised heavy-duty certification procedure (WHDC);  
<http://www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29registry/gtr4.html>
- [7] GTR No 2; Worldwide harmonised motorcycle emission certification procedure (WMTC);  
<http://www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29registry/gtr2.html>
- [8] ISO 14687 - Hydrogen fuel -- Product specification
- [9] ECE-R 83: <http://www.unece.org/trans/main/wp29/wp29regs81-100.html>
- [10] H. Eichseder, M. Klell; Wasserstoff in der Fahrzeugtechnik; Vieweg + Teubner Verlag; Wiesbaden 2008
- [11] SAE J2719 - <...>
- [12] Draft Technical Report - H2SGE-IP-01, December 2008
- [13] Regulations (EC) No 2007-715 and No 2008-692

## **8. CARBON DIOXIDE (CO<sub>2</sub>) EMISSIONS OF HYDROGEN (H<sub>2</sub>) FUELLED VEHICLES**

### ***8.1. Explanation and Specification of the issue***

In legislation (approval and certification of vehicles) the emissions of CO<sub>2</sub> of vehicles are not limited, but in some cases the emissions have to be measured and calculated and are recorded in the test report in g/km. Light Duty Vehicles (LDV) and motorcycles are tested on a roller test bench, driving a transient test cycle. This test procedure including the test cycle is different for vehicle categories and in national legislation. The concentrations of the emissions are measured and then the CO<sub>2</sub> emissions are calculated in g/km.

In legislation (approval and certification of vehicles) the declared emissions of CO<sub>2</sub> are the end of pipe emissions. The well-to-wheel emissions of CO<sub>2</sub> are disregarded in the test reports. The issue of well-to-wheel emissions is currently considered by the EFV informal group of WP.29 [2]

Fuel cell vehicles don't emit CO<sub>2</sub> emissions, if H<sub>2</sub> is used directly. A fuel cell can also be fuelled with H<sub>2</sub>, that was reformed (on vehicle) from a different base fuel ( C<sub>x</sub>H<sub>y</sub> ). In case of a reformer (on vehicle), CO<sub>2</sub> emissions are relevant, depending on the base fuel and the reforming process.

Internal combustion engines (ICE) fuelled with H<sub>2</sub> don't emit CO<sub>2</sub>.

In cases where H<sub>2</sub> is used together with other fuels (H<sub>2</sub>-bi-fuel, H<sub>2</sub>-flex-fuel, H<sub>2</sub>-dual-fuel), CO<sub>2</sub> emissions become relevant. H<sub>2</sub>-bi-fuel systems (BMW) or hydrogen mixtures (e.g. with CNG, [4]) are interesting solutions during the introduction phase of H<sub>2</sub> vehicles, until the infrastructure with H<sub>2</sub> fuelling stations is more developed. For the time being BMW is the only manufacturer producing vehicles with ICE operating as H<sub>2</sub>-bi-fuel.

The level of the CO<sub>2</sub> emissions in H<sub>2</sub> mode of a H<sub>2</sub>-bi-fuel vehicle is very low. In case of the BMW it is 5 g/km. Theoretically it should be equal to zero, but practically the small amount of emissions are caused by lube oil losses, or in case of H<sub>2</sub>-bi-fuel concepts, because the venting of the active carbon filter (evaporative emissions) goes into the intake system of the ICE.

H<sub>2</sub> can be stored liquid (LH<sub>2</sub>) or compressed gaseous (CGH<sub>2</sub>). The influence on CO<sub>2</sub> emissions by the type of storage is not relevant. The only need is to define different reference H<sub>2</sub>-fuel and reference H<sub>2</sub>-gas for emission testing.

### ***8.2. Application and Scope***

#### **8.2.1. Vehicle categories**

In principle all vehicle categories defined in Special Resolution No.1 [1] can be powered by H<sub>2</sub>:

- passenger car (category 1-1 vehicle)
- bus (category 1-2 vehicle)
- truck (category 2 vehicle)
- 2 or 3 wheeler (category 3 vehicle)

Because in today's legislation the measurement of the CO<sub>2</sub> emissions is not required for Heavy Duty Vehicles, agricultural and forestry tractors and Non Road Mobile Machinery (NRMM), therefore these vehicle categories will not be further covered by this report - out of scope.

### **8.2.2. Propulsion system**

Internal combustion engine (ICE), positive or compression ignition, or in combination with an electric engine (Hybrid Electric Vehicle).

Also possible, but not developed for the time being, is a combination of ICE and Fuel Cell (Hybrid Vehicle) - out of scope.

### **8.2.3. Reformer (on vehicle)**

For the time being it's improbable that a vehicle in serial production will be equipped with reformer technology. Furthermore a procedure to measure the CO<sub>2</sub> emissions from the reformer process is not defined. Therefore this technology will not be further covered by this report - out of scope.

### **8.2.4. Fuel Types**

- H<sub>2</sub>-fuel - out of scope, because no CO<sub>2</sub> emissions.
- H<sub>2</sub>-bi-fuel with gasoline, diesel, CNG or LPG.
- H<sub>2</sub> blend/mixture (flex-fuel / dual-fuel) with gasoline, diesel, CNG or LPG.
- H<sub>2</sub> reformed (on board ) from gasoline, diesel, LPG, CNG, methanol - out of scope (see chapter 2.3.).

## **8.3. Definitions**

“Calculation method” - means the calculation method of mass emissions of CO<sub>2</sub>, e.g. defined in annex 6 of ECE-R 101 [9].

“Reference fuel / Reference gas” – means the definition of specifications of the fuel or gas taken for the emission tests.

“H<sub>2</sub>-fuel-vehicle” – means a vehicle that primarily runs on H<sub>2</sub> but may also have a petrol system for emergency purposes or starting only, where the petrol tank does not contain more than 15 litres of petrol.

(This definition is in line with the definition of "mono fuel gas vehicle" in [13])

“H<sub>2</sub>-bi-fuel vehicle” means a vehicle that can run part-time on H<sub>2</sub> and also part time either on gasoline, diesel, LPG or CNG

"Flex-fuel vehicle" - means a vehicle with one fuel storage system that can run on different mixtures of two or more fuels [13].

"Dual-fuel vehicle" – means a vehicle with two storage systems for different fuels, where the both fuels are mixed either in the intake system or during injection into the combustion chamber.

“Hybrid vehicle” - means a vehicle with at least two different energy converters and two different energy storage systems (on vehicle) for the purpose of vehicle propulsion [9], [13]. ([9] and [13] also contains a definition for a “hybrid electric vehicle”).

## **8.4. Overview on existing Regulations & Standards**

### **8.4.1. Passenger cars**

The legislation concerning CO<sub>2</sub> emissions from category 1-1 vehicles is not harmonised. Different test cycles, measurement methods and reference fuels are applicable. None of the existing Regulations includes test methods and requirements for H<sub>2</sub> vehicles (ICE). The current European Euro 5/6 Regulation [13] already mentions H<sub>2</sub> as fuel, but specific test procedures for H<sub>2</sub> will be defined at a later stage.

A (possible) GTR project to develop a worldwide harmonised light vehicles test procedure (WLTP) is under preparation [5]. The documentation in [5] includes a comprehensive overview of the existing national legislation on CO<sub>2</sub> emissions. Currently the emission measurement of H<sub>2</sub> vehicles is not included in the draft roadmap.

ECE-R 101 [9] contains requirements regarding the CO<sub>2</sub> emissions for mono-fuel and bi-fuel vehicles (gasoline, diesel, CNG, LPG). ECE-R 101 will be amended soon to be in line with the European Euro 5/6 requirements [13], including an approach for flex fuel (gasoline and Ethanol).

### **8.4.2. 2/3 wheelers**

With GTR No. 2 [7], a world wide harmonised emission test procedure for 2-wheeled motorcycles is established, including the measurement of CO<sub>2</sub> emissions. The Appendix to GTR No. 2 (Technical Report) [7] includes an overview about the existing national emission legislation for 2-wheelers and relevant standards. H<sub>2</sub> vehicles are not covered by GTR No.2.

The legislation concerning exhaust emissions from mopeds (< 50 ccm, < 50 km/h) and three wheelers is not harmonised. Different test cycles, measurement methods, reference fuels and limit values are applicable. None of the existing Regulations includes test methods and requirements for H<sub>2</sub> vehicles (ICE).

### **8.4.3. Reference Fuel and Reference Gas**

The issue of reference fuel and reference gas is described in more detail in Technical Report II [12]. In case of H<sub>2</sub>-fuel-vehicles the introduction of a reference fuel/gas is not necessary, because the CO<sub>2</sub> emissions are zero.

A specification for H<sub>2</sub> either as flex-fuel or dual-fuel is not existing for the time being.

## **8.5. Work to be done and state of research**

Concerning H<sub>2</sub>-flex-fuel and H<sub>2</sub>-dual fuel, experience and emission test data are required for the development of a measurement procedure, including work on specification of reference fuel (s) and the definition of a calculation method (emissions).

## **8.6. Regulatory approach**

### **8.6.1. Need for regulation**

The measurement of CO<sub>2</sub> emissions of H<sub>2</sub>-bi-fuel vehicles should be regulated. The regulatory approach will be decided by national regulatory decision processes, but probably it will be the same as for other bi-fuel vehicles already regulated [9]. Because the CO<sub>2</sub> emissions of H<sub>2</sub>-bi-fuel vehicles operating in H<sub>2</sub> mode are very low, it is



suggested to disregard the requirement to measure the CO<sub>2</sub> emissions during H<sub>2</sub> operation mode. The CO<sub>2</sub> emissions should be deemed to be zero for that operation mode.

### **8.6.2. Open issues and need for specification**

--.---

### **8.6.3. Assessment of harmonisation - development of a GTR**

In the case of 2-wheeled motorcycles a world wide harmonisation is possible, because GTR's for the measurement of CO<sub>2</sub> emissions already exists. This is not the case for LDV, and the development of a world wide harmonised test cycle and measurement procedure especial for LDV using H<sub>2</sub> in ICE as H<sub>2</sub>-bi-fuel is not efficient and feasible.

In the case of motorcycles with ICE using H<sub>2</sub> (H<sub>2</sub>-bi-fuel) which are ready for marketing, an amendment of GTR No. 2 (WMTC) can easily be developed. Such an amendment of the existing GTR only need the extension of the scope to H<sub>2</sub>-bi-fuel vehicles and the decision about the measurement of CO<sub>2</sub> only in the petrol mode. In this case there is no need to adapt the existing measurement and calculation methods. The amendment of GTR No. 2 can be considered as a mid-term activity.

For LDV it should be considered to introduce this H<sub>2</sub>-bi-fuel approach (see above) with the WLTP GTR [5]. In the meantime, existing national legislation or ECE-R101 can be amended.

As a conclusion, it is not proposed to develop a special GTR for the measurement of CO<sub>2</sub> emissions of H<sub>2</sub> vehicles.

## **8.7. References**

- [1] Special Resolution No.1; Concerning the common definitions of vehicle categories, masses and dimensions (S.R.1); TRANS/WP.29/1045
- [2] <http://www.unece.org/trans/main/wp29/wp29wgs/wp29grpe/efv04.html>
- [4] Regulation (EC) no 79/2009; Official Journal of the European Union; L 35/32
- [5] WLTP - GTR roadmap phase;  
<http://www.unece.org/trans/main/wp29/wp29wgs/wp29grpe/wltp01.html>
- [6] GTR No. 4; Worldwide harmonised heavy-duty certification procedure (WHDC);  
<http://www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29registry/gtr4.html>
- [7] GTR No 2; Worldwide harmonised motorcycle emission certification procedure (WMTC);  
<http://www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29registry/gtr2.html>
- [9] ECE-R101: <http://www.unece.org/trans/main/wp29/wp29regs101-120.html>
- [12] Draft Technical Report - H2SGE-IP-01, December 2008
- [13] Regulations (EC) No 2007-715 and No 2008-692

## **9. NOISE EMISSIONS**

### **9.1. Explanation and Specification of the issue**

In legislation the noise emissions of vehicles (stationary and moving) and of tyres are regulated.

The noise emissions from internal combustion engines powered with H<sub>2</sub> are comparable to conventional vehicles. Fuel cell vehicles can be considered as quiet vehicles, like electric powered vehicles. Regarding tyres it's the same situation as with conventional vehicles.

The UNECE World Forum WP.29 has determined that road transport vehicles propelled in whole or in part by electric means, can be critical to pedestrians. Further, the World Forum has directed GRB to assess and determine what, if any, steps might be taken by WP.29 to mitigate potential pedestrian hazards through the use of acoustic means, recognizing that other means of communication may also be appropriate. GRB has established an informal working group to carry out activities to determine the viability of "quiet vehicle" audible acoustic signalling techniques and the potential need for their global harmonization. [1].

### **9.2. Application and Scope**

In principle all vehicle categories can be powered by H<sub>2</sub> [1]:

- passenger car (category 1-1 vehicle)
- bus (category 1-2 vehicle)
- truck (category 2 vehicle)
- 2 or 3 wheeler (category 3 vehicle)

Also possible, is the use of H<sub>2</sub> in agricultural and forestry tractors [2] and Non Road mobile Machinery (NRMM) [3]. Today there is not big interest for marketing of such solutions. therefore these vehicle categories will not be further covered by this report.

Propulsion system and fuel are not relevant criteria in noise requirements.

### **9.3. Definitions**

--.---

### **9.4. Overview on existing Regulations & Standards**

ECE Regulation R 41 (motorcycles) and R 51 (passenger cars, trucks, busses) covers test procedures and performance requirements to limit the noise emissions of these vehicles. Rolling sound emissions of tyres are regulated in ECE R 117.

These existing regulations are already applicable for H<sub>2</sub> powered vehicles.

Activities for the development of GTR's in the field of noise emissions are possible in future, but not mandated by AC.3 for the time being.

### **9.5. Work to be done and state of research**

Concerning the issue of noise emissions of Hydrogen powered vehicles special research activities are not necessary.

### **9.6. Regulatory approach**

As a conclusion, it is not proposed to develop a special GTR for the measurement and limitation of noise emissions of H2 vehicles.

### **9.7. References**

[1] Report 51st GRB, Annex II

<http://www.unece.org/trans/doc/2010/wp29grb/ECE-TRANS-WP29-GRB-49e.pdf>

## **10. HARMONISATION ASSESSMENT IN THE AREA OF ENVIRONMENTAL AND ENERGETIC ASPECTS**

This chapter summarises the findings and recommendations on the regulation approach to be taken based on the chapters dedicated to each issue (see above).

### **10.1. Fuel consumption**

The GTR should be established consistently with common agreement on the topics.

The bases for GTR could be standards and regulation (national or regional) existing or under development. The related content should be, therefore, harmonized on international basis.

### **10.2. Fuel Quality**

Once the technology to produce and assure the quality of hydrogen fuel containing minute amount of impurities as specified in the fuel standards is established and such reference fuel is made available, it will be possible to evaluate the effect of impurities on individual vehicles and thus be helpful in the development of FCV.

### **10.3. Pollutant Emissions of Hydrogen (H<sub>2</sub>) Fuelled Vehicles**

In case of HDV and 2-wheeled motorcycles a world wide harmonisation is possible, because GTR's for the measurement of pollutant emissions already exists. This is not the case for LDV, and the development of a world wide harmonised test cycle and measurement procedure especial for LDV using H<sub>2</sub> in ICE is not efficient and feasible.

In case motorcycles or HDV with ICE using H<sub>2</sub> are ready for marketing, an amendment of GTR No. 2 (WMTC) or GTR No. 4 (WHDC) can easily be developed. Such amendments of the existing GTR's only need the definition of the reference fuel, the calculation method for NO<sub>x</sub> (H<sub>2</sub>-fuel) and the definition of the H<sub>2</sub>-bi-fuel approach. This can be considered as a mid-term activity for both vehicle categories.

For LDV it should be considered to introduce a reference fuel (gas), a calculation method for the NO<sub>x</sub> emissions and the definition of the H<sub>2</sub>-bi-fuel approach with the WLTP GTR. In the meantime, existing national legislation or ECE-R 83 can be amended.

As a conclusion, it is not proposed to develop a special GTR for the measurement and limitation of pollutant emissions of H<sub>2</sub> vehicles.

### **10.4. Carbon dioxide (CO<sub>2</sub>) Emissions of Hydrogen (H<sub>2</sub>) Fuelled Vehicles**

In case 2-wheeled motorcycles a world wide harmonisation is possible, because GTR's for the measurement of CO<sub>2</sub> emissions already exists. This is not the case for LDV, and the development of a world wide harmonised test cycle and measurement procedure especial for LDV using H<sub>2</sub> in ICE as H<sub>2</sub>-bi-fuel is not efficient and feasible.

In case motorcycles with ICE using H<sub>2</sub> (H<sub>2</sub>-bi-fuel) are ready for marketing, an amendment of GTR No. 2 (WMTC) can easily be developed. Such an amendment of the existing GTR only need the extension of the scope to H<sub>2</sub>-bi-fuel vehicles and the decision about the measurement of CO<sub>2</sub> only in the petrol mode. In this case there is no need to adapt the existing measurement and calculation methods. The amendment of GTR No. 2 can be considered as a mid-term activity.

For LDV it should be considered to introduce this H2-bi-fuel approach (see above) with the WLTP GTR. In the meantime, existing national legislation or ECE-R 101 can be amended.

As a conclusion, it is not proposed to develop a special GTR for the measurement of CO2 emissions of H2 vehicles.

#### **10.5. Water emissions**

Although a full technical report is not available it can be considered that although water emission might be a safety problem in the future (water freezing in winter) it is mainly a safety concern and not an environmental concern. On the other hand the foreseeable number of HFCV in the short term will be low and therefore no regulation is needed at this moment.

#### **10.6. Noise emissions**

ECE Regulation R 41 (motorcycles) and R 51 (passenger cars, trucks, busses) covers test procedures and performance requirements to limit the noise emissions of these vehicles. Rolling sound emissions of tyres are regulated in ECE R 117.

These existing regulations are already applicable for H2 powered vehicles.

Activities for the development of GTR's in the field of noise emissions are possible in future, but not mandated by AC.3 for the time being.

As a conclusion, it is not proposed to develop a special GTR for the measurement and limitation of noise emissions of H2 vehicles.

#### **10.7. Summary and conclusions**

The only two areas that a GTR is proposed either as stand alone or as part of another GTR concerning HFCV are in the measurement of fuel consumption and a definition of a fuel quality.

In the first case i.e. fuel consumption, the recommendation is to use existing or underdevelopment standards and harmonise them on international basis. The open question here is the development of a harmonised test cycle (it is underway at the UN ECE) but in the mean time the harmonisation will be in the method for the measurement of the fuel consumption allowing each region to apply its own test cycle until the world harmonised test cycle is not been approved.

On the other hand is perceived as helpful to define a reference fuel (fuel standard) as this will allow evaluating the effect of impurities on individual vehicles and supporting the development of HFCV.

-----