

19 July 2013

---

## **Global registry**

**Created on 18 November 2004, pursuant to Article 6 of the Agreement concerning the establishing of global technical regulations for wheeled vehicles, equipment and parts which can be fitted and/or be used on wheeled vehicles (ECE/TRANS/132 and Corr.1) done at Geneva on 25 June 1998**

## **Addendum 2: Global technical regulation No. 2**

**Measurement procedure for two-wheeled motorcycles equipped with a positive or compression ignition engine with regard to the emission of gaseous pollutants, CO2 emissions and fuel consumption**

## **Amendment 3**

Established in the Global Registry on 27 June 2013

---



**UNITED NATIONS**

Paragraph 8.1.1.4.2., amend Equation 8-2 to read:

"8.1.1.4.2. Hydrocarbons

... by means of the following formula:

$$HC_m = \frac{HC_c \times V \times dHC}{dist \times 10^3}$$

Equation 8-2

..."

Paragraph 8.1.1.4.3., amend Equation 8-4 to read:

"8.1.1.4.3. Carbon monoxide

... by means of the following formula:

$$CO_m = \frac{CO_c \times V \times dCO}{dist \times 10^3}$$

Equation 8-4

..."

Paragraph 8.1.1.4.4., amend Equation 8-6 to read:

"8.1.1.4.4. Nitrogen oxides

... by means of the following formula:

$$NO_{xm} = \frac{NO_{xc} \times K_h \times V \times dNO_2}{dist \times 10^3}$$

Equation 8-6

..."

Paragraph 8.1.1.4.5., amend Equation 8-10 to read:

"8.1.1.4.5. Carbon dioxide

... by means of the following formula:

$$CO_{2m} = \frac{CO_{2c} \times V \times dCO_2}{dist} \times 10$$



Equation 8-10

..."

Annex 13,

Paragraph 1., Figure A13-1, amend to read:

"

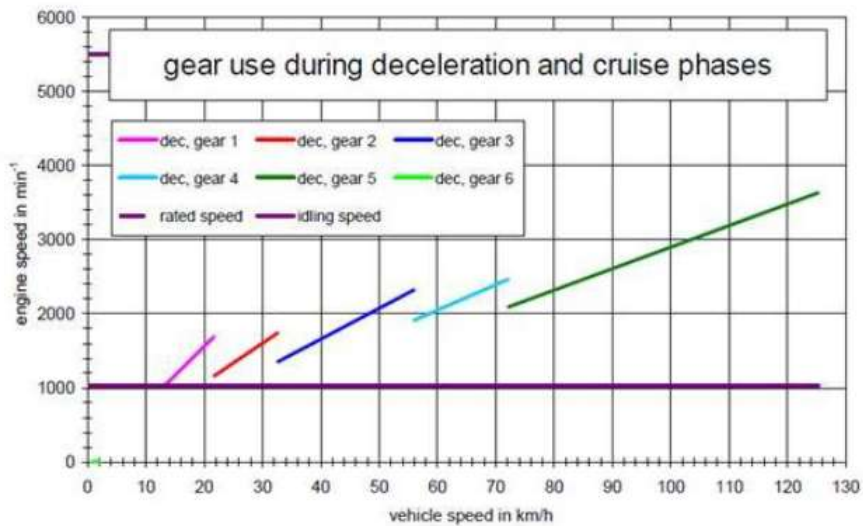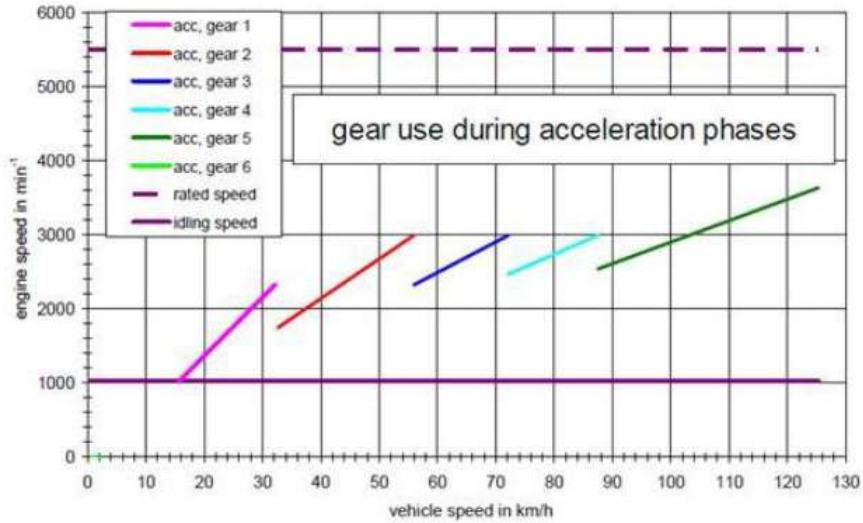

"