

19 February 2010

AGREEMENT

**CONCERNING THE ADOPTION OF UNIFORM TECHNICAL PRESCRIPTIONS
FOR WHEELED VEHICLES, EQUIPMENT AND PARTS WHICH CAN BE FITTED
AND/OR BE USED ON WHEELED VEHICLES AND THE CONDITIONS FOR
RECIPROCAL RECOGNITION OF APPROVALS GRANTED ON THE BASIS OF
THESE PRESCRIPTIONS */**

(Revision 2, including the amendments which entered into force on 16 October 1995)

Addendum 105: Regulation No. 106

Revision 1 - Amendment 1

Supplement 7 to the original version of the Regulation - Date of entry into force:
24 October 2009

**UNIFORM PROVISIONS CONCERNING THE APPROVAL OF PNEUMATIC TYRES
FOR AGRICULTURAL VEHICLES AND THEIR TRAILERS**



UNITED NATIONS

*/ Former title of the Agreement:

Agreement Concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts, done at Geneva on 20 March 1958.

GE.10-

Insert a new paragraph 3.1.8.1., to read:

"3.1.8.1. The inscription 'I-3' for implement tyres with traction tread as identified in Annex 5, tables 5 and 6."

Insert a new paragraph 6.4.3., to read:


"6.4.3. However, for the types of tyre for which the size designation is given in the first column of the tables in Annex 5, the allowed percentages are those given in the relevant tables, if any."

Annex 3, part C, amend to read:

"PART C: IMPLEMENT TYRES

Example of the markings to be borne by types of tyres
 complying with this Regulation

250/70 R 20 IMP

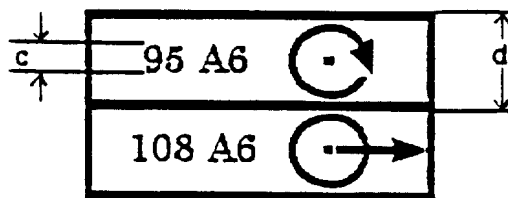

MINIMUM HEIGHTS OF MARKINGS (mm)

...

- (c) the symbol "TUBELESS", I-3 if any, the optional word "RADIAL", the optional word "IMPLEMENT" and the date of manufacture may be at a distance from the size designation."

Annex 5.

Table 5, insert the following new tyre size designations:

"

Tyre size designation	Theoretical rim width code (A1)	Nominal section width (S1)	Overall diameter (D)	Nominal rim diameter (d)
		(mm)	(mm)	(mm)
4.10/3.50-4 IMP	2.10	89	272	101
190-8 IMP	5.50	182	430	203

"

Table 5, insert a new column for "Overall diameter (D)" identified by (*), and add in the new column the relevant values for the following tyre size designations:

Tyre size designation	Theoretical rim width code (A1)	Nominal section width (S1) (mm)	Overall diameter (D)		Nominal rim diameter (d) (mm)
				(*)	
			(mm)		
4.00 – 8 IMP	3	112	418	425	203
4.00 – 9 IMP	3	112	443	460	229
4.0 – 10 IMP	3	114	455	465	254
4.00 – 10 IMP	3	114	465	475	254
4.00 – 12 IMP	3	112	519	536	305
4.00 – 15 IMP	3	112	595	612	381
4.00 – 18 IMP	3	112	672	688	457
4.50 – 19 IMP	3	124	720	733	483
4.80 – 8 IMP	3,75	121	423	449	203
5.0 – 10 IMP	4	145	505	517	254
5.00 – 12 IMP	4	145	567	580	305
5.00 – 14 IMP	4	145	618	631	356
5.00 – 15 IMP	3	130	639	655	381
5.50 – 16 IMP	4	150	685	703	406
5.90 – 15 IMP	4	150	665	681	381
6.00 - 9 IMP	4,5	169	543	556	229
6.00 – 16 IMP	4	158	712	729	406
6.50 – 16 IMP	4,5	173	735	754	406
6.70 – 15 IMP	4,5	182	704	720	381
7.00- 12 IMP	5	187	667	685	305
7.50 – 10 IMP	6	214	634	649	254
7.50 – 16 IMP	5,5	202	785	801	406
7.50 – 18 IMP	5,5	202	836	852	457
7.50 – 20 IMP	5,5	202	887	903	508

Tyre size designation	Theoretical rim width code (A1)	Nominal section width (S1) (mm)	Overall diameter (D)		Nominal rim diameter (d) (mm)
				(*)	
			(mm)		
7.50 – 24 IMP	5,5	202	989	1013	610
7.60 – 15 IMP	5,5	193	734	751	381
13.50 – 16.1 IMP	11	353	1021	1043	409

After table 5 (3 of 3), add the following notes to read:

- "Notes: 1. The suffix "IMP" may be replaced by the wording "IMPLEMENT" on the tyre sidewall.
2. Tyres of radial structure are identified by means of the letter "R" in place of "-" (e.g. 7.5 L R 15).
3. Overall diameters (D) in column (*) apply to tyres marked with classification code 'I-3' – see paragraph 3.1.8.2."

Table 6, insert a new column for "Overall diameter (D)" identified by (*), and add in the new column the relevant values for the following tyre size designations:

Tyre size designation	Theoretical rim width code (A1)	Nominal section width (mm)	Overall diameter (D)		Nominal rim diameter (d) (mm)
				(*)	
			(mm)		
8.5L – 14 IMP	6	216	721	735	356
9.5L – 14 IMP	7	241	741	757	356
9.5L – 15 IMP	7	241	767	782	381
11L – 14 IMP	8	279	752	770	356
11L – 15 IMP	8	279	777	796	381
11L – 16 IMP	8	279	803	821	406
12.5L – 15 IMP	10	318	823	845	381
12.5L – 16 IMP	10	318	848	870	406
16.5L – 16.1 IMP	14	419	1024	1046	409
6.5/80 – 12 IMP	5	163	569	588	305
6.5/80 – 15 IMP	5	163	645	663	381
9.0/75 – 16 IMP	7	226	749	770	406
10.0/80 – 12 IMP	9	264	710	730	305
11.0/65 - 12 IMP	9	281	670	692	305
10.0/75 - 15.3 IMP	9	264	760	780	389
11.5/80 – 15.3 IMP	9	290	845	867	389

Tyre size designation	Theoretical rim width code (A1)	Nominal section width	Overall diameter (D)		Nominal rim diameter (d)
				(*)	
		(mm)	(mm)		(mm)
10.5/80 – 18 IMP	9	274	885	907	457
12.0/75 - 18 IMP	9	299	915	937	457
12.5/80 - 18 IMP	9	308	965	987	457
14.5/80 - 18 IMP	12	372	1060	1082	457
15.0/55 - 17 IMP	13	391	850	872	432
15.5/80 - 24 IMP	13	394	1240	1262	610
16.0/70 - 20 IMP	14	418	1075	1097	508
16.5/85 - 24 IMP	13	417	1322	1344	610
16.5/85 - 28 IMP	13	417	1423	1445	711

After table 6 (3 of 3), add the following note 3 to read:

3. Overall diameters (D) in column (*) apply to tyres marked with classification code 'I-3' – see paragraph 3.1.8.2."

Table 7, insert the following new tyre size designations:

Tyre size designation	Theoretical rim width code (A1)	Nominal section width	Overall diameter	Nominal rim diameter
		(S1)	(D)	(d)
		(mm)	(mm)	(mm)
13x6.00-6	5	154	330	152
14x4.50-6	3,5	113	356	152
18x7.50-8	6	191	457	203
19x9.50-8	7,5	240	483	203
20x8.00-8	6,5	204	508	203
20x9.00-8	7	227	508	203
21x7.00-10	5,5	177	533	254
23x9.50-12	7	235	577	305
24x12.00-12	9,5	304	610	305
25x8.00-12	6,5	203	635	305
25x10.00-12	8	254	635	305
25x11.00-12	9	279	635	305
DH73x50.00-32	44	1270	1880	813

After table 7 (4 of 4), add the following note 4. to read:

- "4. Coefficient "b" for the calculation of the Overall diameter D_{max} :
- (a) 1.12 for tyres with Nominal rim Diameter (d) less than 380 mm;
 - (b) 1.10 for tyres with Nominal rim Diameter (d) 381 mm and above."
