




GRE/2012/27...


Ad hoc modifications

Ph. D. Tomasz Targosinski
Poland




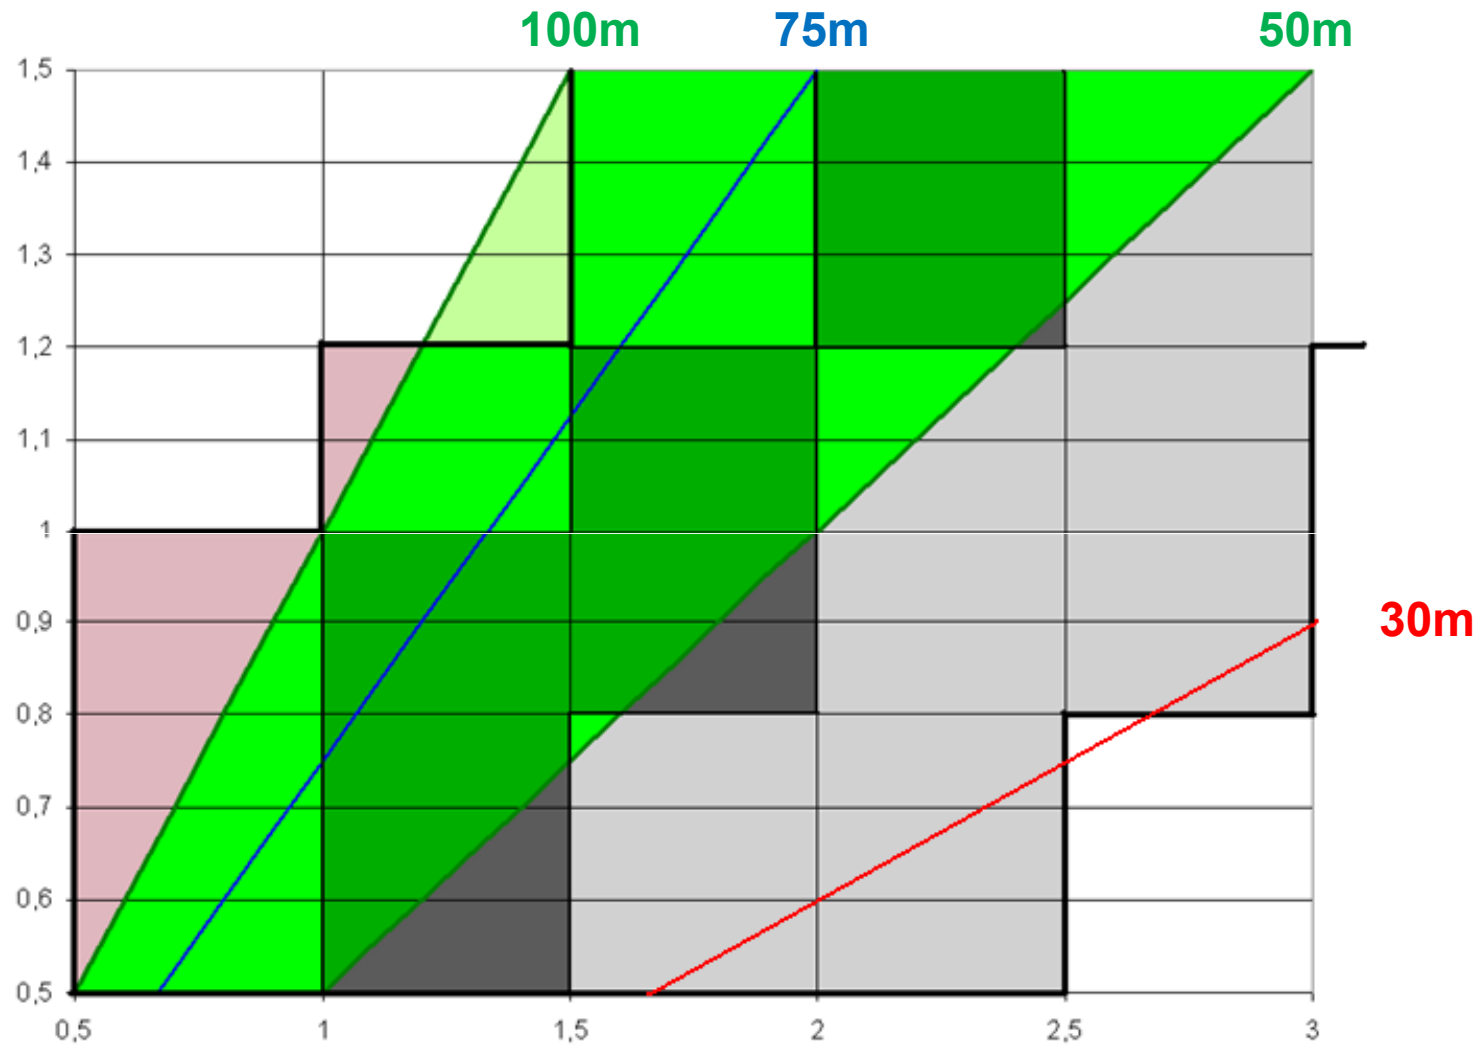

GRE/2012/27 ranges

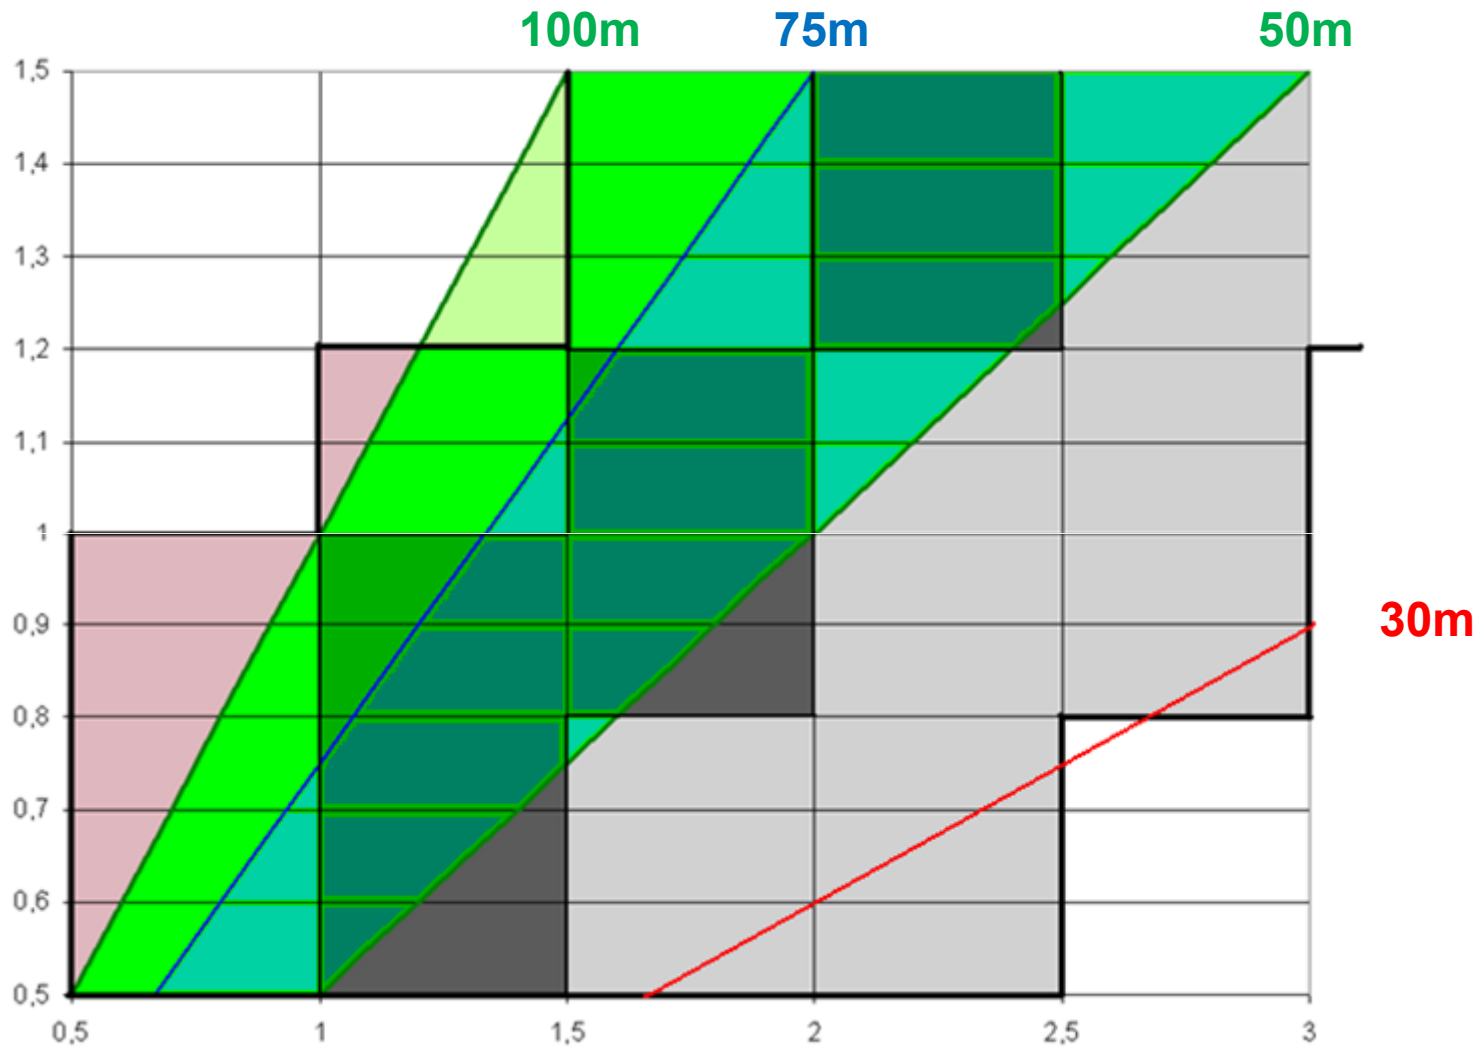


- Depending on the mounting height in metres (h) of the **dipped-beam headlamp reference axis**, the **vertical inclination of the cut-off of the dipped beam**, (in the direction of the reference axis) measured on the unladen vehicles, taking in account 0.1 per cent accuracy, shall have the value of initial aiming for which the horizontal part of cut-off crosses the surface of flat horizontal road **between the distance 50m and 75 m** from the headlamp.

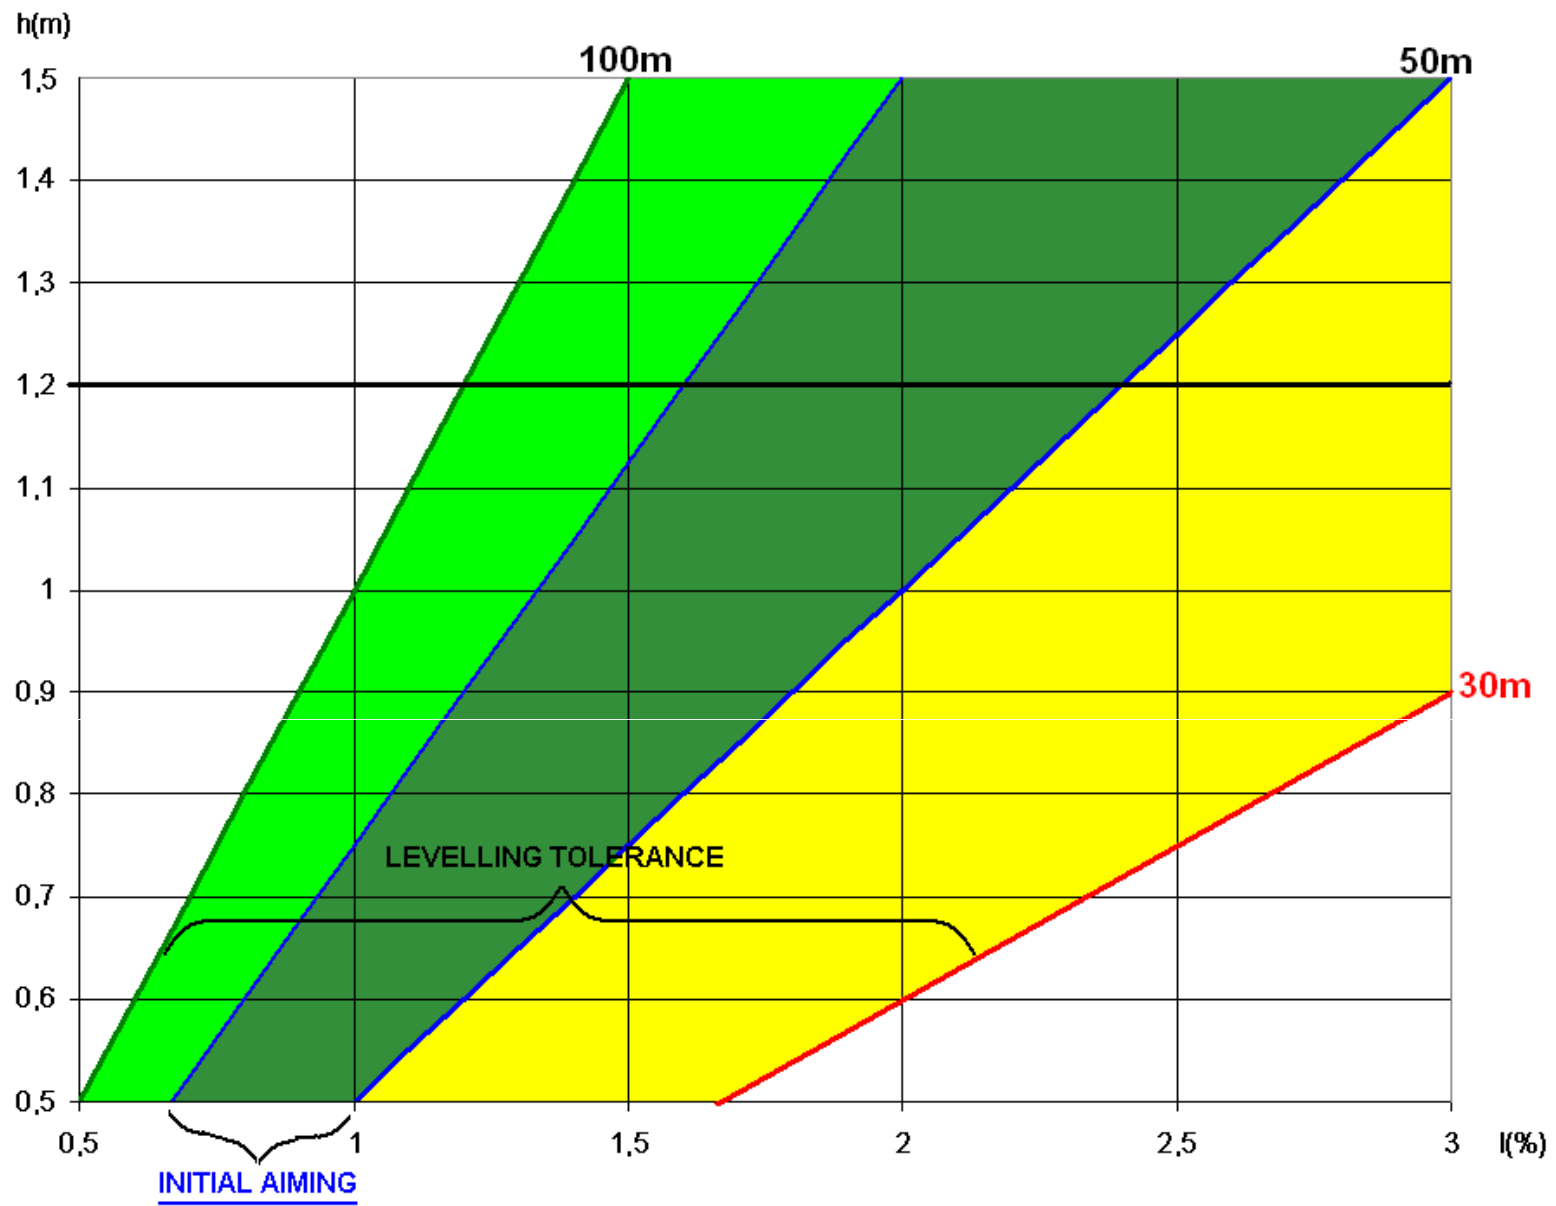

Modified initial aiming



WHO IS RESPONSIBLE FOR DRIVERS INFORMATION AND SAFETY?

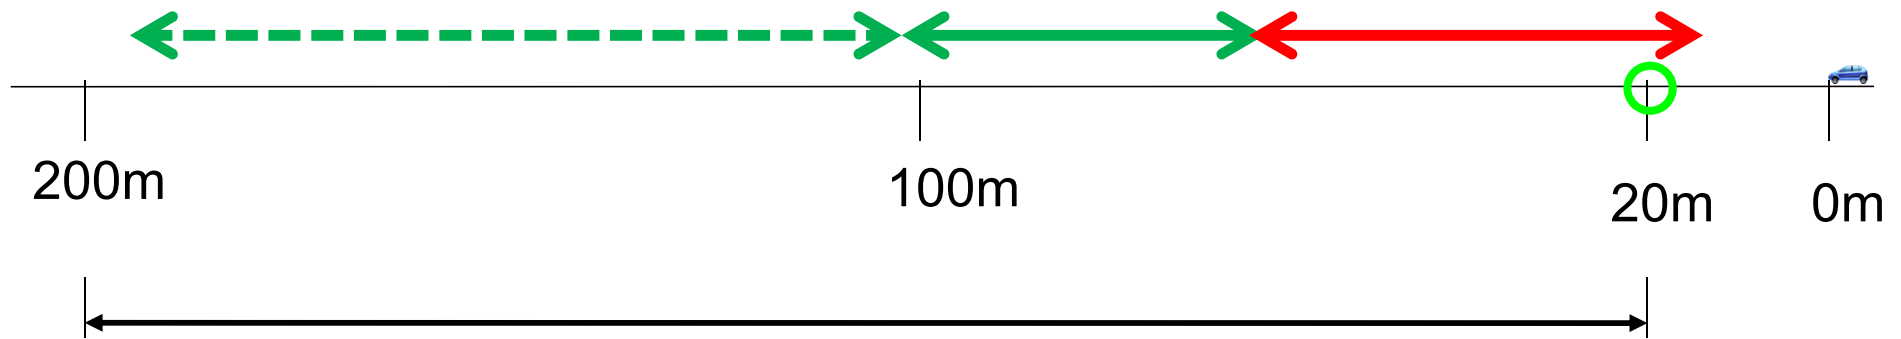

Possible range of road illumination distances in present version of Reg 48.



**THANK YOU FOR YOUR
ATTENTION**

