


Informal document No. **GRSP-35-5**
(35th GRSP, 3-7 May 2004,
agenda item B.1.1.)

PROPOSAL FOR DRAFT CORRIGENDUM TO REGULATION No. 14
Transmitted by the Italian delegation

This document introduces a corrigendum to the figure 6: ISOFIX Top tether anchorage location, ISOFIX zone – side view for document TRANS/WP.29/931 adopted by the Administrative Committee (AC.1) following the recommendation of WP.29 at its one-hundred-and-thirtieth session.

Insert a new dimensioning of 563.0 mm in figure 6 between R point and H point:

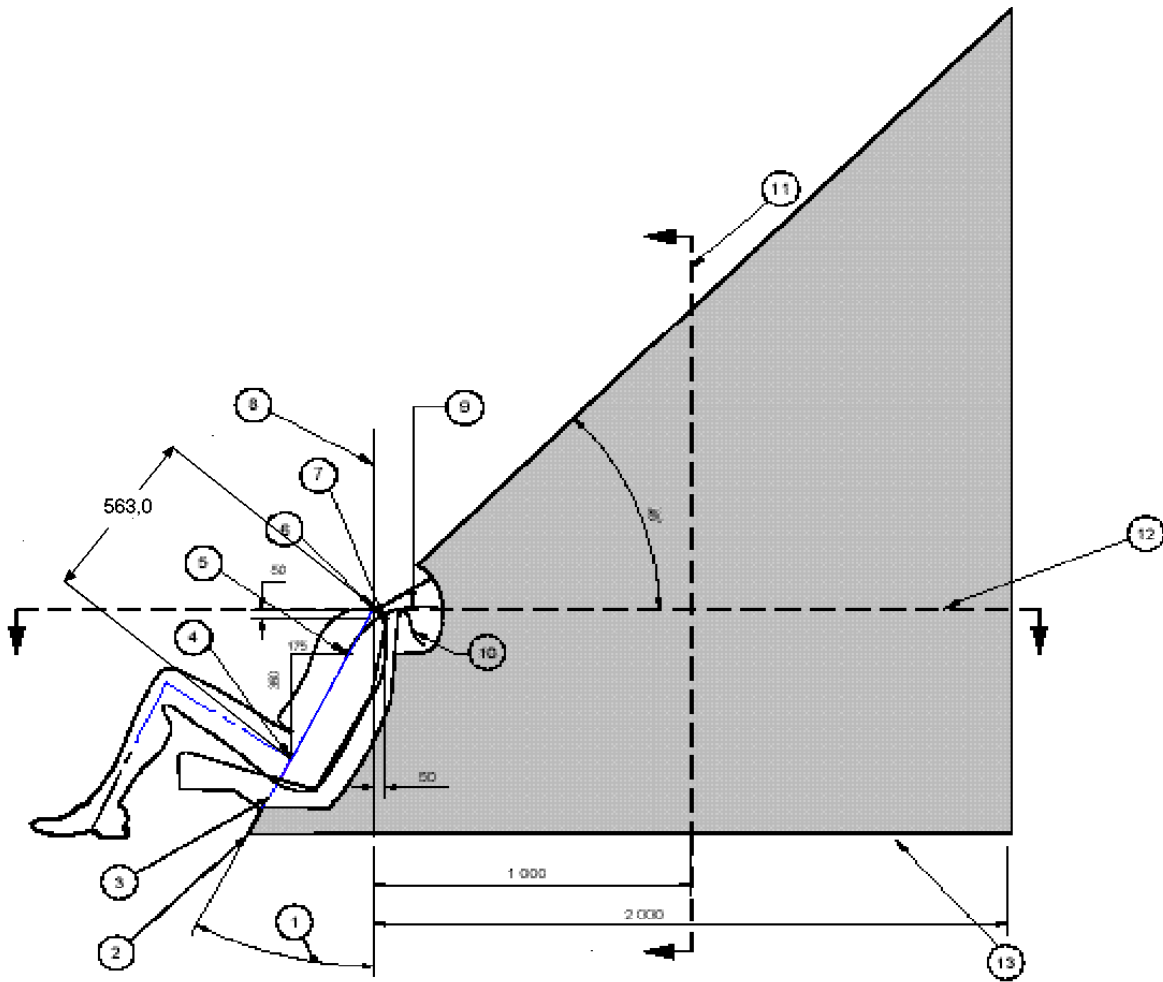

Justification

The document TRANS/WP29/931 adopted by AC1, introducing the figure n°6 concerning top tether location, lacks of diagonal distance between point “R” and point “H” of 563.0 mm (as reported in US STD 225). This lack hinders the right location of points “R” and “W” and as a consequence how to draw the shaded area.