



EEVC WG12 Rear Impact Biofidelity Evaluation Programme

**Presented by David Hynd
Chairman, EEVC WG20**

Introduction

- **EEVC WG20 formed in 2003 to develop test procedures for rear impacts**
 - Prime focus on neck injury reduction
- **EEVC WG12 to recommend dummies, injury criteria and injury risk functions for WG20 test procedures**
 - Based on biomechanical evidence

EEVC WG12 - Dummy Issues

WG12 will make recommendations on

- **Selection of a dummy**
 - With appropriate biofidelity in low-speed rear impact test conditions
- **Injury criteria**
 - With a biomechanical basis
- **Injury risk functions**
 - With a biomechanical basis

EEVC WG12 Biofidelity Evaluation



- **Several dummies used in or proposed for low-speed rear impact test procedures**
 - BioRID II, RID^{3D}, Hybrid III
 - Most have been evaluated in certain test conditions, but...
 - ... No consistent evaluation of the latest versions of each dummy across a range of test conditions
- **WG12 have selected a range of biofidelity test conditions to**
 - Evaluate the BioRID II, RID^{3D} and Hybrid III dummies
 - BioRID II and RID^{3D} included as purpose-designed rear impact dummies
 - Hybrid III included as proposed in rear impact GTR

Biofidelity Test Conditions

- **Rear impact biofidelity requirements chosen, based on**
 - The availability of the full data set
 - Quality of the test set-up and instrumentation
 - Reproducibility
 - Relevance of the test conditions, loading condition and velocity change
 - Distribution of subject anthropometry, gender and age
 - The number of tests and test subjects
- **Biofidelity requirements**
 - 4 based on volunteer data
 - 1 based on PMHS data


Biofidelity Test Conditions

AZT/Chalmers
volunteer tests

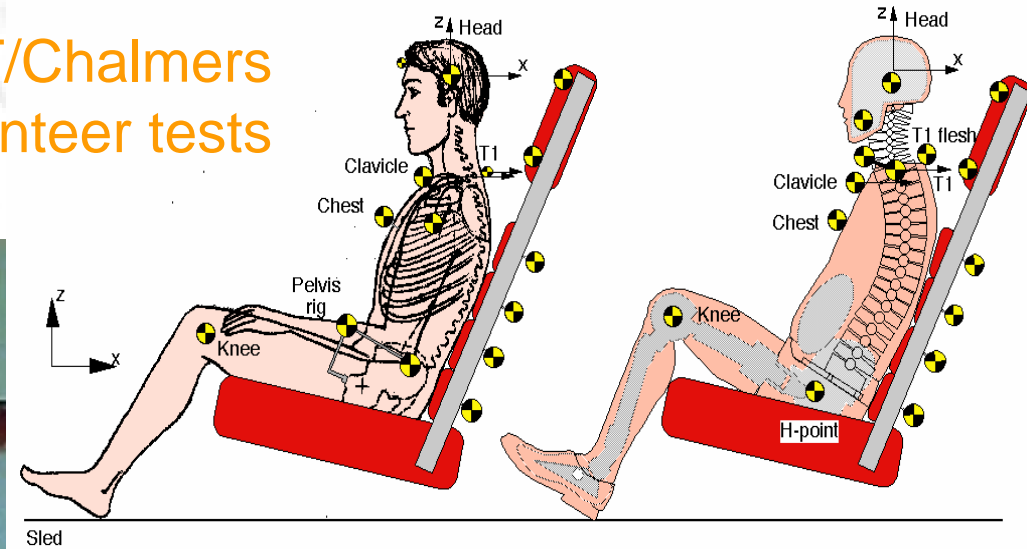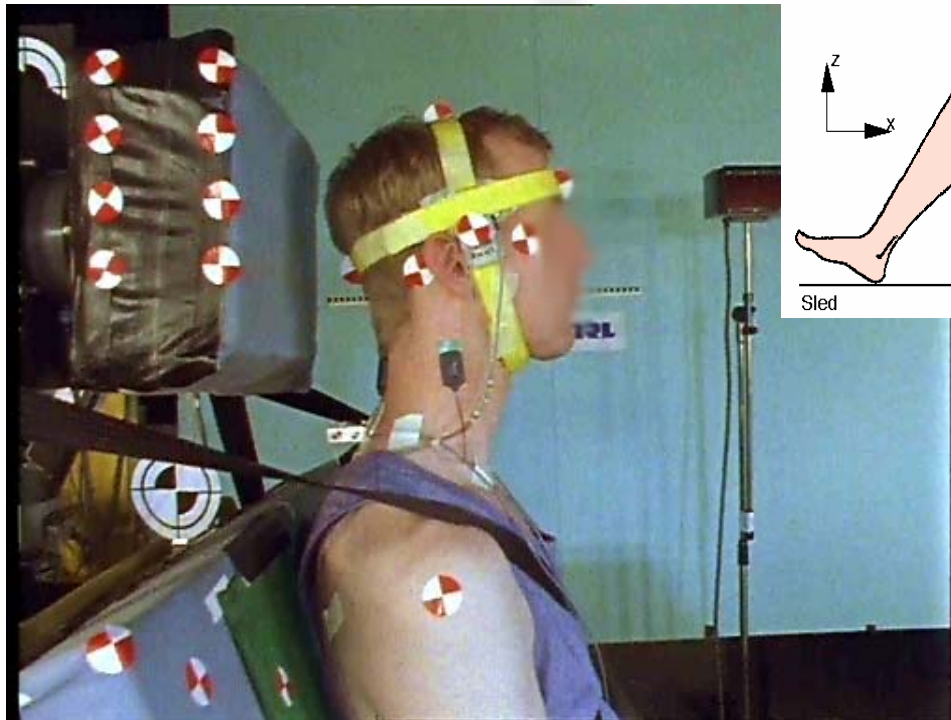

TRL volunteer tests

Biofidelity Test Conditions

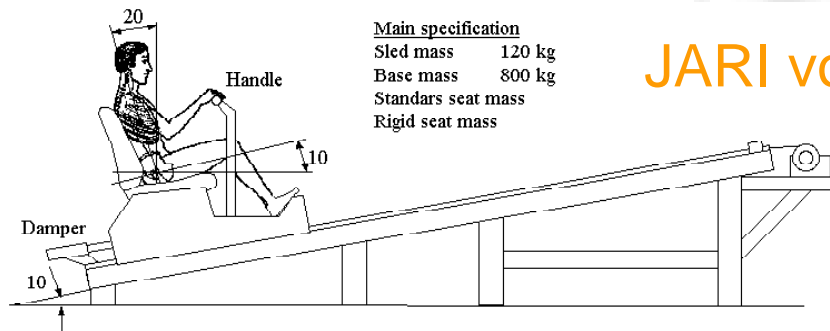


Main specification
 Sled mass 120 kg
 Base mass 800 kg
 Standard seat mass
 Rigid seat mass

JARI volunteer tests



GDV/Allianz
 volunteer
 tests


LAB
 PMHS
 tests

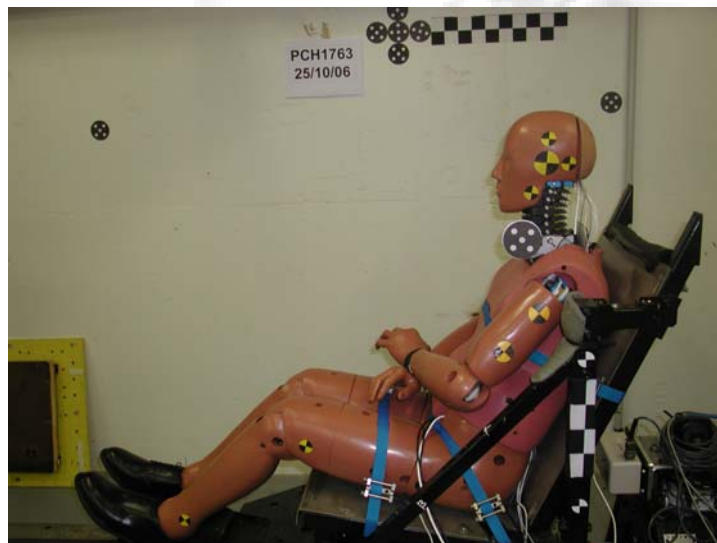

Biofidelity Requirements

- **Most relevant criteria prioritised**
 - E.g. head angle, T1 angle, head CoG displacement...

- **New target corridors developed using a standardised method**
 - EEVC WG9 method
 - Mean \pm 1 std dev
 - Straight line approximation for tabulation

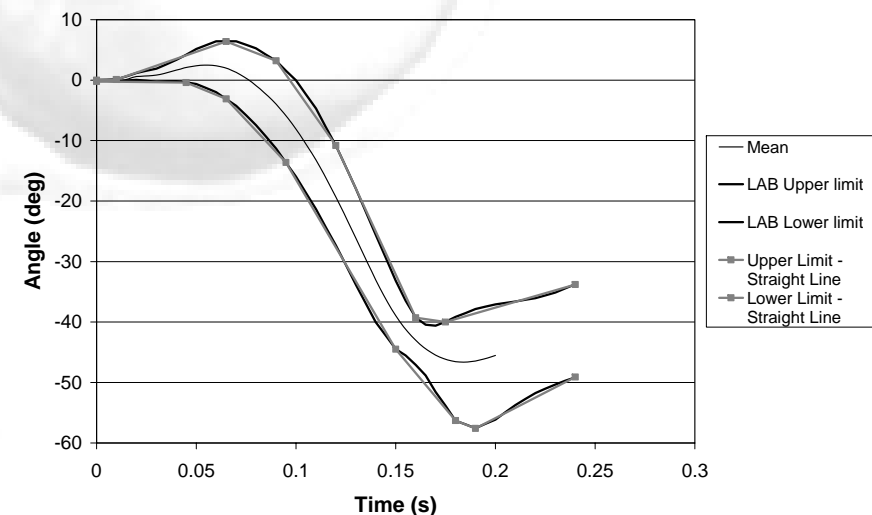


LAB - head angle wrt T1 co-ordinate system

Biofidelity Analysis

- **Subjective analysis**
 - Performance with respect to target corridors
 - Influence of seat type and relevance to real-world seat testing
- **Objective analysis**
 - CORA analysis - goodness of fit of each dummy response to each mean PMHS or volunteer response
 - Algorithm developed by PDB
 - Score 1 if entirely within inner corridor (mean human ± 1 std dev)
 - Score 0 if entirely outside outer corridor (mean ± 2 std dev)
 - Linear aggregation between these limits

Biofidelity Results


- Some typical results...

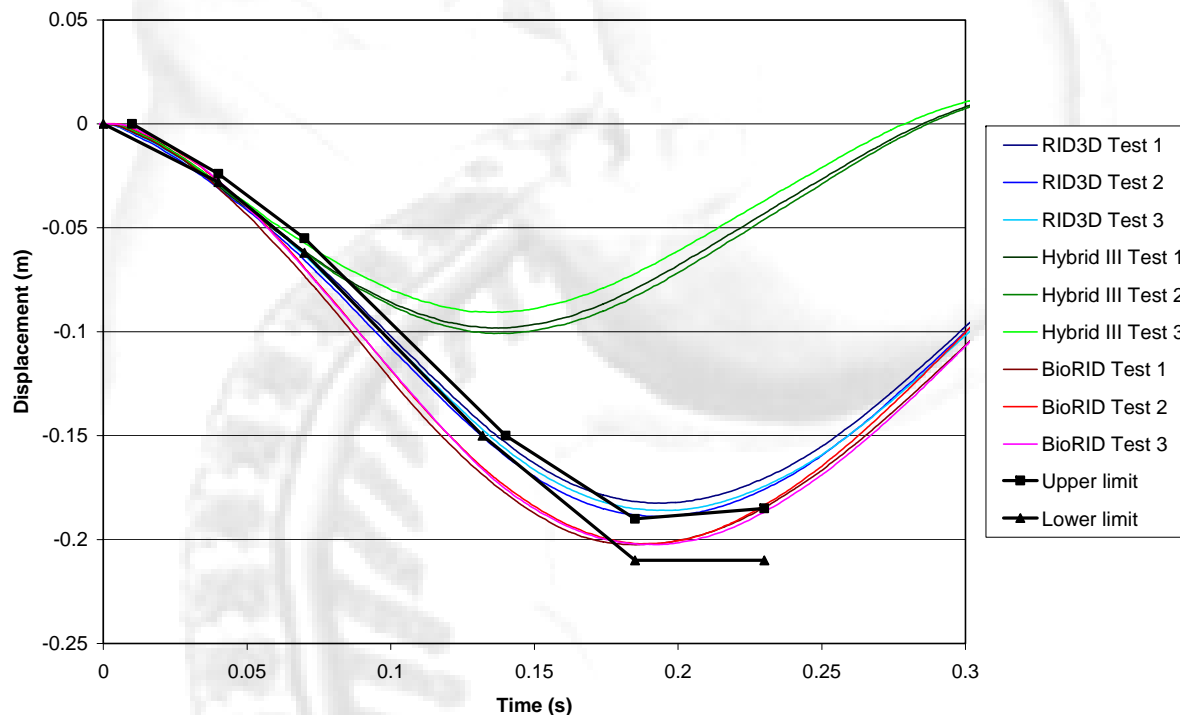

LAB test results - head CoG x-axis displacement w.r.t. the sled - PMHS, no head restraint

Biofidelity Results


- Some typical results...

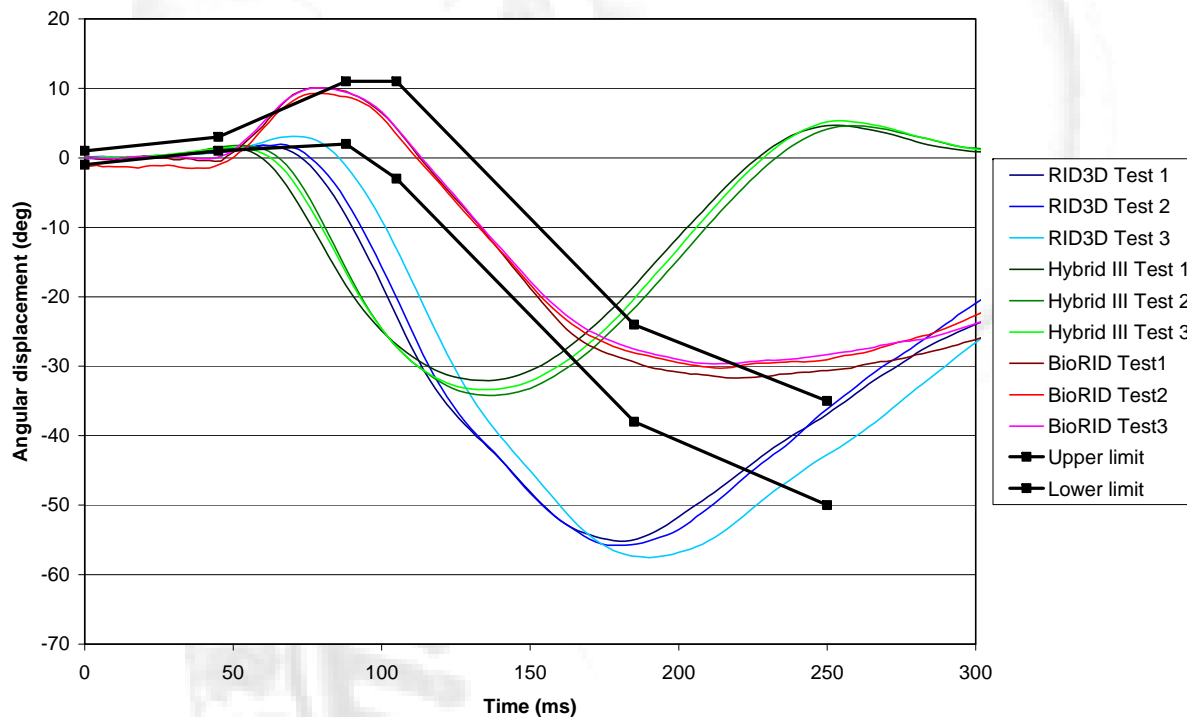

JARI test results - head rotation w.r.t. T1 - volunteer, no head restraint

Biofidelity Results


- Some typical results...

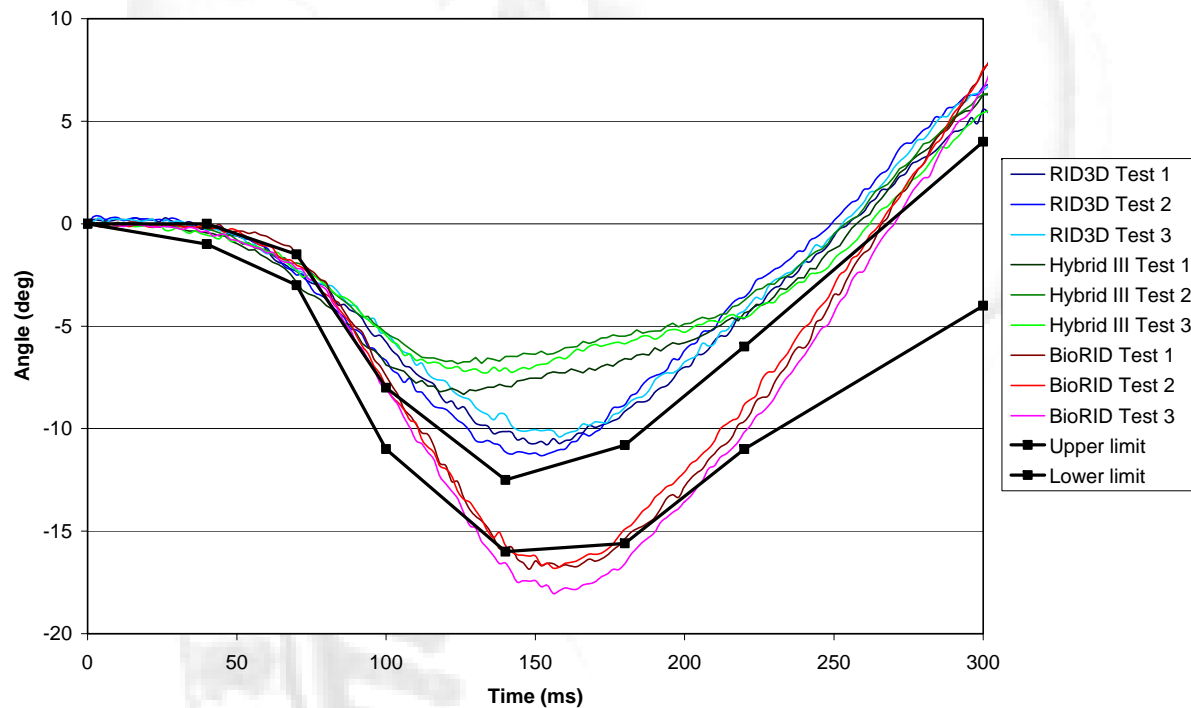

Chalmers/AZT test - T1 angle w.r.t. the sled

Biofidelity Results

- Some typical results...

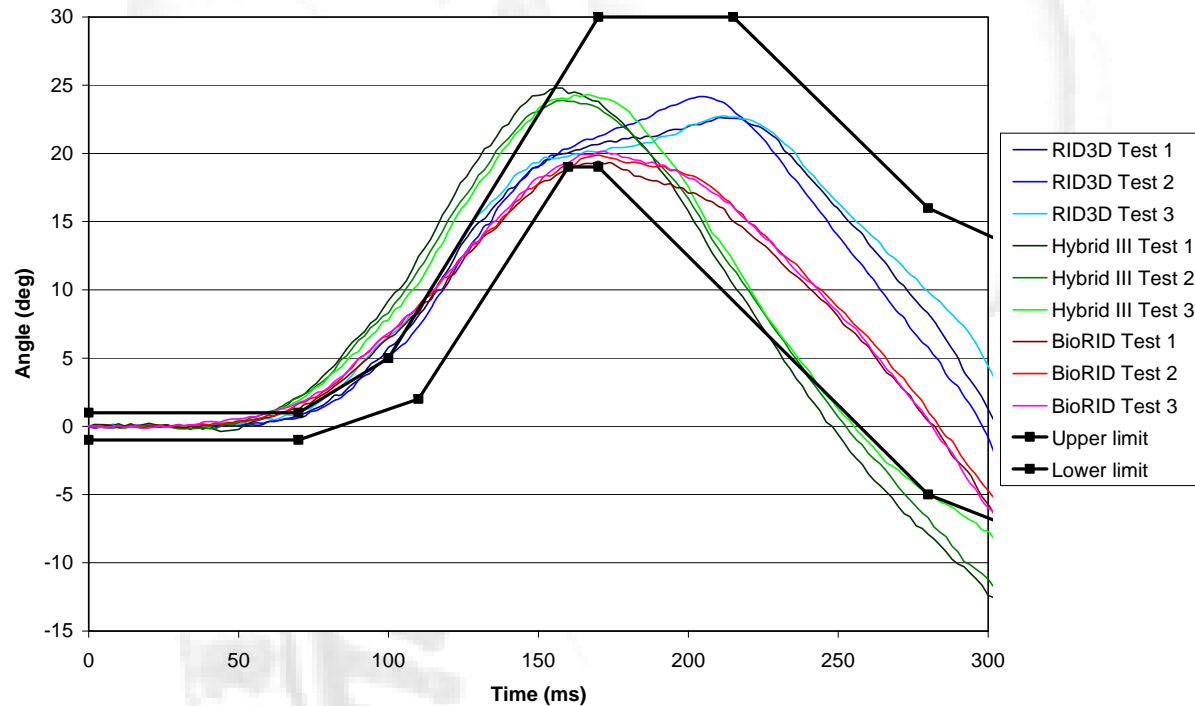

Chalmers/AZT test - Head rotation w.r.t. the sled

Biofidelity Results

- **Biofidelity - Hybrid III**
 - Head motion w.r.t. T1 not biofidelic
 - Head rotation good in some seats, poor in others - biofidelity seat dependent
 - T1 rotation generally not biofidelic
 - Head acceleration poor
 - Seat back interaction least humanlike
 - Head restraint interaction least humanlike - contact force too low

Biofidelity Results

- **Biofidelity - RID^{3D}**
 - Biofidelity better at higher test severity
 - Not as able to accommodate different seat structures as BioRID and seat back interaction not as good as BioRID
 - Head restraint interaction comparable to BioRID II
- **Biofidelity - BioRID II**
 - Best overall biofidelity, although z displacements not good (nor for Hybrid III nor RID^{3D})
 - Head restraint interaction comparable to RID^{3D}
 - Seat back interaction most humanlike

Biofidelity Results

- Objective CORA analysis

Parameter	RID ^{3D}	Hybrid III	BioRID II
T1 angle w.r.t. the sled	0.55	0.38	0.77
T1 x-axis displacement	0.53	0.50	0.47
T1 x-axis acceleration	0.56	0.48	0.60
Head rotation w.r.t. T1	0.45	0.28	0.59
Head C of G x-axis displacement w.r.t. T1	0.49	0.50	0.60
Head rotation w.r.t. the sled	0.49	0.29	0.62
Head C of G x-axis displacement w.r.t. the sled	0.62	0.43	0.46
Overall	0.53	0.41	0.59

Biofidelity Results

- Objective CORA analysis

Parameter	RID ^{3D}	Hybrid III	BioRID II
T1 angle w.r.t. the sled	0.55	0.38	0.77
T1 x-axis displacement	0.53	0.50	0.47
T1 x-axis acceleration	0.56	0.48	0.60
Head rotation w.r.t. T1	0.45	0.28	0.59
Head C of G x-axis displacement w.r.t. T1	0.49	0.50	0.60
Head rotation w.r.t. the sled	0.49	0.29	0.62
Head C of G x-axis displacement w.r.t. the sled	0.62	0.43	0.46
Overall	0.53	0.41	0.59

Biofidelity Results

- Objective CORA analysis

Parameter	RID ^{3D}	Hybrid III	BioRID II
T1 angle w.r.t. the sled	0.55	0.38	0.77
T1 x-axis displacement	0.53	0.50	0.47
T1 x-axis acceleration	0.56	0.48	0.60
Head rotation w.r.t. T1	0.45	0.28	0.59
Head C of G x-axis displacement w.r.t. T1	0.49	0.50	0.60
Head rotation w.r.t. the sled	0.49	0.29	0.62
Head C of G x-axis displacement w.r.t. the sled	0.62	0.43	0.46
Overall	0.53	0.41	0.59

Conclusions

- **Hybrid III, RID^{3D} and BioRID II successfully evaluated in five biofidelity test conditions**
- **Hybrid III had insufficient biofidelity to be considered further as a test tool for low-speed rear impact**
- **For many parameters, RID^{3D} and BioRID II were similarly biofidelic wrt target corridors**
 - **Subjectively, BioRID slightly better**
 - **Objectively (CORA analysis) BioRID scored higher (0.59) than RID^{3D} (0.53) - average of seven parameters from five test conditions**
- **BioRID showed better seat back and head restraint interaction**

Conclusions

- **Overall, recommend that based on the currently available biofidelity data, BioRID II is the most suitable dummy for use in a low-speed rear impact test procedure**
 - **Scope for improvement of T1 vertical motion**
- **Repeatability and reproducibility evaluation underway**
 - **Testing complete**
 - **Analysis available soon**



End of Presentation

**Presented by David Hynd
Chairman, EEVC WG20**

www.eevc.org